

AMPHENOL PLUG	
AMPHENOL SOCKET	
14 ORANGE A	1
14 YELLOW A	2
14 BROWN/YELLOW A	3
16 BLUE	4
-	5
14 BLACK	6

AMPHENOL PLUG	
AMPHENOL SOCKET	
14 YELLOW B	1
14 BROWN/YELLOW B	2


14/16
.250
PIGGYBACK
16 BLUE

6 AMP
SHORT STOP BREAKER
WITH RED BOOT
BC-2000783


14 RED
15 AMP
ARCH

14/16 X 3/8" RING
14 RED/BLACK

14/16 X 5/16" RING
14 BLACK



BC-183614
40 AMP RELAY



14/16 .250 FMQD	
14 YELLOW A	1
14 BLACK	2
14 YELLOW A	3
14 BLACK	4
14 YELLOW B	5

14/16 .250 FMQD	
14 BROWN/YELLOW A	1
14 BLACK	2
14 BROWN/YELLOW A	3
14 BLACK	4
14 BROWN/YELLOW B	5

AMPHENOL PLUG	
AMPHENOL SOCKET	
14 YELLOW B	1
14 BROWN/YELLOW B	2


(ON)/OFF MOMENTARY
BC-3000143
BLUE RECEPT
BC-3000126

AMPHENOL RECEPT	
AMPHENOL SOCKET	
14 YELLOW C	1
-	2
14 ORANGE B	3
16 BLUE	4
16 BLACK	5

(ON)/OFF MOMENTARY
BC-3000143
BLUE RECEPT
BC-3000126

AMPHENOL RECEPT	
AMPHENOL SOCKET	
14 BROWN/YELL C	1
-	2
14 ORANGE B	3
16 BLUE	4
16 BLACK	5

"UP" STICKER
BC-3000155



TRANSLUCENT
ACTUATOR
BC-3000136


"DOWN" STICKER
BC-3000156



TRANSLUCENT
ACTUATOR
BC-3000136

INSTALL SWITCHES
AND IGNITION
(BC-230091)
INTO SWITCH
PANEL
(BC-4000592)

(BC-4000592)

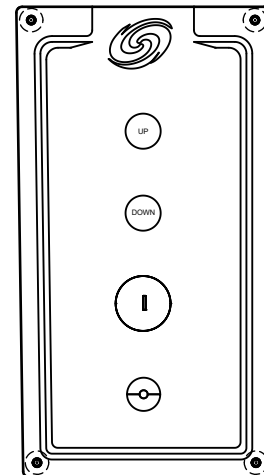

↑
↓
PLUG
TOGETHER

AMPHENOL RECEPT	
AMPHENOL PIN	
14 ORANGE B	1
14 YELLOW C	2
14 BROWN/YELLOW C	3
16 BLUE	4
-	5
14 BLACK	6

HARNES - BC-10000165

X	X	X	X	QES QUALITY ENGINEERED SERVICES SYRACUSE, IN	TITLE: 2360 ELECTRIC-CANOPY	REV. -
X	X	X	X		VISIBLE: <input type="radio"/> YES <input checked="" type="radio"/> NO	SCALE: X
X	X	X	X		DRWN AC-10/14/21	CUSTOMER P/N: -
X	X	X	X		CKD BLANK SIZE: X	PART NUMBER: 5001857
SYM	REVISION DESCRIPTION	BY	DATE	USED ON: GODFREY		