



Submittal Data Information

CI Series Pumps

301-1304

EFFECTIVE: JANUARY 31, 2004


SUPERSEDES: FEBRUARY 28, 2003

1760 RPM MODEL 2506

JOB _____ ENGINEER _____ CONTRACTOR _____ REP. _____

ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.
----------	-----------	---------------	--------	----------	------	-------------

WEIGHT _____ PUMP/MOTOR _____

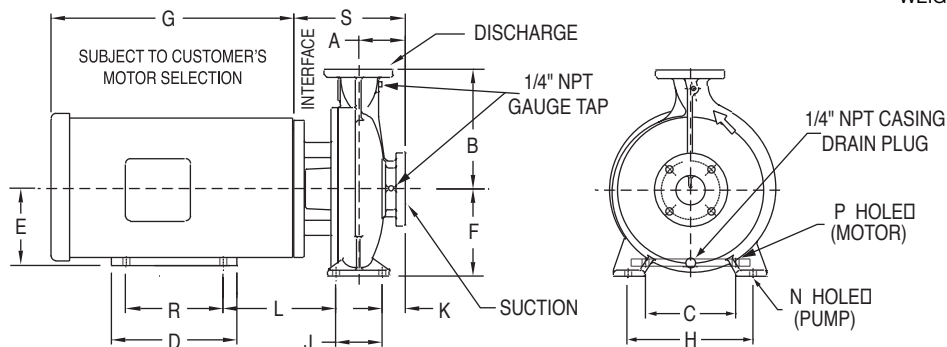


Model No. Flange Size (Suction x Discharge)	HP 1760 (RPM)	A 250 PSI	B 250 PSI	K 250 PSI	S 250 PSI
2506 3 x 2 1/2 (76 x 64)	1	4.11 (104)	7.56 (192)	2.24 (57)	8.29 (211)
	1.5				
	2				

50 Cycle Performance Curves attached when applicable.

Model No. Flange Size (Suction x Discharge)	Motor Frame	HP 1760 (RPM)	A 125 PSI	B 125 PSI	C (Motor)	D	E	F	G	H (Pump)	J	K 125 PSI	L	N (Pump)	P	R	S 125 PSI						
2506 3 x 2½ (76 x 64)	143JM	1	3.74 (95)	7.25 (184)	5.5 (140)	5.94 (151)	3.5 (89)	6.30 (160)	10.0 (254)	8.34 (212)	3.74 (95)	1.87 (47)	5.18 (132)	0.63 (16)	0.34 (9)	4.0 (101)	7.92 (201)						
	145JM	1.5			5.5 (140)	5.94 (151)	3.5 (89)		10.0 (254)				5.18 (132)		0.34 (9)	5.0 (127)							
		2			5.5 (140)	5.94 (151)	3.5 (89)		10.0 (254)				5.18 (132)		0.34 (9)	5.0 (127)							

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ().
Do not use for construction purposes unless certified.

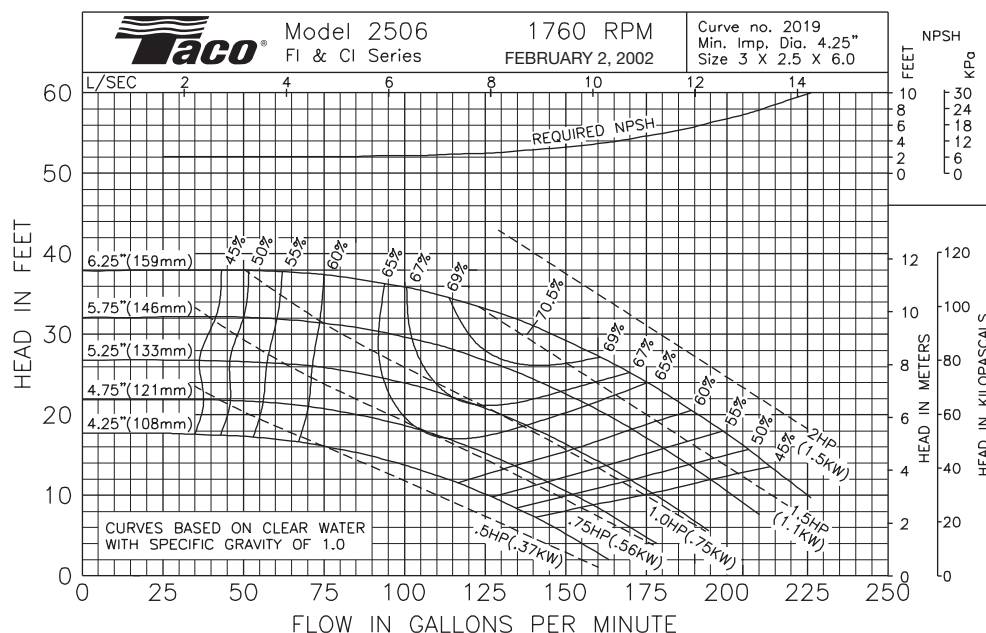

Item	BRONZE FITTED		ALL IRON	
	Std. Pump Constr.	Optional	Standard	Optional
Casing	Cast Iron ASTM A48 Class 30A	N/A	Cast Iron ASTM A48 Class 30A	N/A
Impeller	Bronze ASTM B584-836	N/A	Cast Iron ASTM A48 Class 30A	N/A
Wear Ring	N/A	Bronze ASTM B584-932 SAE660	N/A	N/A
Shaft	Carbon Steel AISI 1045	St. Steel AISI 416 ASTM A582	Carbon Steel AISI 1045	St. Steel AISI 416 ASTM A582
Shaft Sleeve	Bronze ASTM B584-932 SAE660	St. Steel AISI 303 ASTM A276	St. Steel AISI 303 ASTM A276	N/A
Mech. Seal	Ceramic/EPT	CF	Ceramic/EPT	CF
Seal Flush Line	Copper	CF	Stainless Steel	CF

OPERATING SPECIFICATIONS		
	Standard	Optional
Flange	125# 860K	250# 1720K
Pressure	175 PSIG* 1210 KPA	300 PSIG** 2070 KPA
Temperature	250°F 120°C	250°F 120°C

Motors: All NEMA Standard (JM Frame)
* In accordance with ANSI Standard B16.1 Class 125
** In accordance with ANSI Standard B16.1 Class 250 Dim.
CF - Consult Factory N/A - Not Available

Comments: _____

TACO, INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 FAX: (401) 942-2360.

TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3. Telephone: 905/564-9422. FAX: 905/564-9436.

Printed in USA
Copyright 2004
TACO, INC.