


Idea #1  
Tee and ball valve

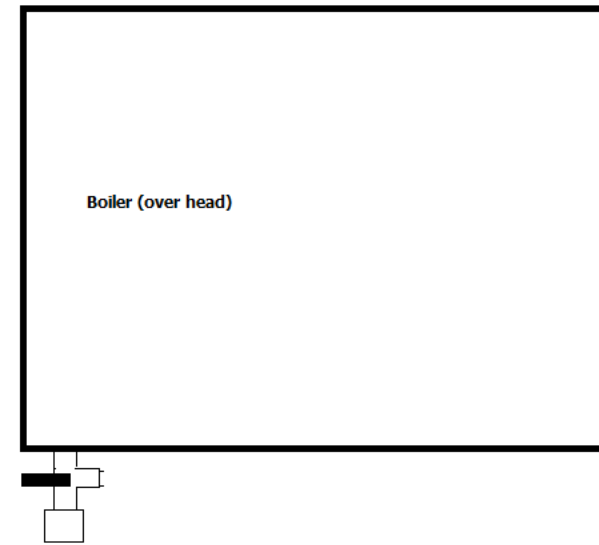

Idea #2  
2 way valve with non sealable open port. Either the flow goes thru the relief valve, or onto the floor. In this scenario, you could put in the jet sweat, turn the valve to block flow to the relief valve, and replace. Then turn back to put into operation, remove jet sweat.