



SPECIALTIES

File No. 1540


AIR ELIMINATOR, No. 220B AIR CHECK, No. 222

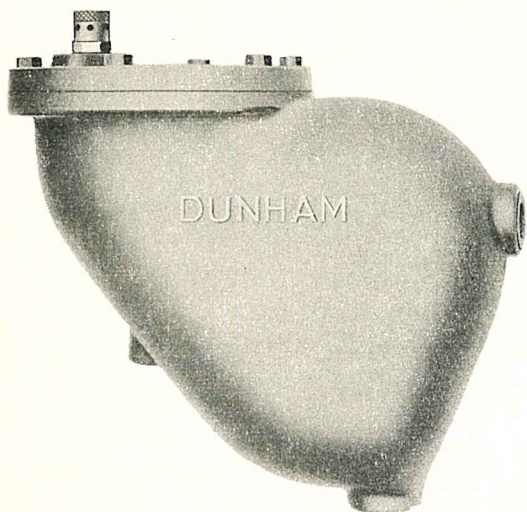

AIR ELIMINATOR, NO. 220B



AIRCHECK, NO. 222

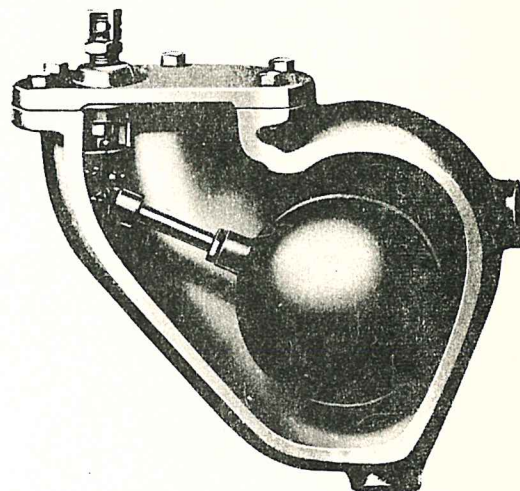

AIR ELIMINATOR CONSTRUCTION

APPLICATION

A Dunham Air Eliminator No. 220B, in combination with the Aircheck No. 222, is used to vent air from the return piping of gravity steam heating systems operating

on 6 ounces to 10 ounces steam pressure. The Aircheck is used separately to vent the Accumulator Tank on Vacuum Pump installations.

FEATURES

1. **Simple, rugged construction.** The Air Eliminator consists of a body, cover, float valve assembly and air check. Body and cover are cast iron; float valve and seat are bronze. All working parts are made of non-corrosive metals especially adapted for heavy duty.
2. **Instantaneous valve action.** Design of float valve assembly

permits rapid and positive valve action. When float nears top of Air Eliminator body, the vent valve closes and prevents water from escaping through the Aircheck.

3. **Rapid removal of air.** Dunham Aircheck releases air at the slightest pressure but prevents its re-entrance into the system.

CAPACITIES, DIMENSIONS AND WEIGHTS

CAPACITY - 2000 SQ. FT. EDR

SHIPPING WEIGHTS:

Air Eliminator Complete - 21-3/4 Lbs.
Air Check - 1 Lb.

WHEN ORDERING OR SPECIFYING, INDICATE:

- (1) Air Eliminator Number
- (2) Air Check Number

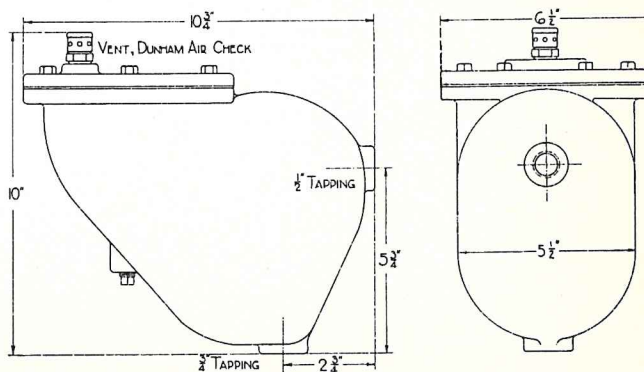



FIG. 1. AIR ELIMINATOR and AIR CHECK DIMENSIONS