



WAP3205 v2

Wireless N300 Access Point

Version 1.00
Edition 2, 10/2015

User's Guide

Default Login Details

Web Address	http://zyxelsetup
Password	1234

IMPORTANT!

READ CAREFULLY BEFORE USE.

KEEP THIS GUIDE FOR FUTURE REFERENCE.

Screenshots and graphics in this book may differ slightly from your product due to differences in your product firmware or your computer operating system. Every effort has been made to ensure that the information in this manual is accurate.

Related Documentation

- Quick Start Guide

The Quick Start Guide shows how to connect the WAP3205 v2 and access the Web Configurator.

- More Information

Go to support.zyxel.com to find other information on the WAP3205 v2.



Contents Overview

User's Guide	8
Getting to Know Your WAP3205 v2	9
WAP3205 v2 Modes	13
Access Point Mode	15
Client Mode	21
Universal Repeater Mode	31
Introducing the Web Configurator	41
Connection Wizard	45
Tutorials	54
Technical Reference	71
Monitor	72
Wireless LAN	76
LAN	94
Maintenance	99
Troubleshooting	106

Table of Contents

Contents Overview	3
Table of Contents	4
Part I: User's Guide	8
Chapter 1	
Getting to Know Your WAP3205 v2.....	9
1.1 Overview	9
1.2 Applications	9
1.3 Ways to Manage the WAP3205 v2	9
1.4 Good Habits for Managing the WAP3205 v2	10
1.5 Resetting the WAP3205 v2	10
1.5.1 Procedure to Use the Reset Button	10
1.6 The WPS Button	10
1.7 LEDs	11
1.8 Wall Mounting	12
Chapter 2	
WAP3205 v2 Modes	13
2.1 Overview	13
2.1.1 Device Modes	13
Chapter 3	
Access Point Mode.....	15
3.1 Overview	15
3.2 What You Can Do	15
3.3 What You Need to Know	16
3.4 Setting your WAP3205 v2 to AP Mode	16
3.4.1 Configuring your WLAN, LAN and Maintenance Settings	16
3.5 AP Mode Status Screen	16
3.5.1 Navigation Panel	19
Chapter 4	
Client Mode	21
4.1 Overview	21
4.2 What You Can Do	21
4.3 What You Need to Know	21

4.4 Setting your WAP3205 v2 to Client Mode	22
4.5 Client Mode Status Screen	22
4.6 Wireless LAN Profile Screen	24
4.6.1 Adding a New WLAN Profile	25
4.7 Site Survey Screen	28
4.8 WPS Screen	29
Chapter 5	
Universal Repeater Mode.....	31
5.1 Overview	31
5.2 What You Can Do	31
5.3 What You Need to Know	32
5.4 Setting your WAP3205 v2 to Universal Repeater Mode	32
5.5 Universal Repeater Mode Status Screen	32
5.6 WPS Screen	34
5.7 Universal Repeater Screen	36
5.7.1 No Security	36
5.7.2 Static WEP	37
5.7.3 WPA(2)-PSK	39
5.8 Site Survey Screen	39
Chapter 6	
Introducing the Web Configurator	41
6.1 Overview	41
6.2 Accessing the Web Configurator	41
6.2.1 Login Screen	41
6.2.2 Password Screen	42
6.2.3 Home Screen	43
Chapter 7	
Connection Wizard	45
7.1 Overview	45
7.2 Accessing the Wizard	45
7.2.1 Device Password	45
7.2.2 Operation Mode	46
7.2.3 Wireless Configuration	46
Chapter 8	
Tutorials.....	54
8.1 Overview	54
8.2 Connecting to the Internet from an Access Point	54
8.3 Configuring Wireless Security Using WPS	54
8.3.1 Push Button Configuration (PBC)	55

8.3.2 PIN Configuration	56
8.4 Enabling and Configuring Wireless Security (No WPS)	57
8.4.1 Configure Your Notebook	59
8.5 Using Multiple SSIDs on the WAP3205 v2	61
8.5.1 Configuring Security Settings of Multiple SSIDs	62
8.6 Connecting the WAP3205 v2 (in Universal Repeater Mode) to an AP or Wireless Router	65
8.7 Connecting the WAP3205 v2 (in Client Mode) to an AP or Wireless Router	68
8.7.1 Connecting to a Wireless Network Using Site Survey	68
8.7.2 Connecting to a Wireless Network Using a Profile	69
8.7.3 Deploying the WAP3205 v2 in your Network	70

Part II: Technical Reference..... 71

**Chapter 9
Monitor..... 72**

9.1 Overview	72
9.2 What You Can Do	72
9.3 Log	72
9.4 Packet Statistics	73
9.5 WLAN Station Status	74

**Chapter 10
Wireless LAN..... 76**

10.1 Overview	76
10.2 What You Can Do	76
10.3 What You Should Know	77
10.3.1 Wireless Security Overview	77
10.4 General Wireless LAN Screen	80
10.5 Wireless Security Screen	81
10.5.1 No Security	81
10.5.2 WEP Encryption	82
10.5.3 WPA-PSK/WPA2-PSK	83
10.5.4 WPA/WPA2 Authentication	84
10.6 MAC Filter	86
10.7 Wireless LAN Advanced Screen	87
10.8 Quality of Service (QoS) Screen	88
10.9 WPS Screen	89
10.10 WPS Station Screen	90
10.11 Scheduling Screen	90
10.12 WDS Screen	91

Chapter 11	
LAN	94
11.1 Overview	94
11.2 What You Can Do	94
11.3 What You Need To Know	94
11.3.1 LAN TCP/IP	95
11.3.2 IP Alias	95
11.4 LAN IP Screen	95
11.5 IP Alias Screen	97
11.6 STP Screen	98
Chapter 12	
Maintenance	99
12.1 Overview	99
12.2 What You Can Do	99
12.3 General Screen	99
12.4 Password Screen	100
12.5 Time Setting Screen	101
12.6 Firmware Upgrade Screen	102
12.7 Configuration Backup/Restore Screen	104
12.8 Restart Screen	105
Chapter 13	
Troubleshooting	106
13.1 Power, Hardware Connections, and LEDs	106
13.2 WAP3205 v2 Access and Login	107
13.3 Internet Access	108
13.4 Resetting the WAP3205 v2 to Its Factory Defaults	109
13.5 Wireless Router/AP Troubleshooting	110
Appendix A Pop-up Windows, JavaScripts and Java Permissions	111
Appendix B IP Addresses and Subnetting	120
Appendix C Setting Up Your Computer's IP Address	130
Appendix D Wireless LANs	158
Appendix E Common Services	171
Appendix F Customer Support	174
Appendix G Legal Information	180
Index	187

PART I

User's Guide

Getting to Know Your WAP3205 v2

1.1 Overview

This chapter introduces the main features and applications of the WAP3205 v2.


The WAP3205 v2 extends the range of your existing wired network without additional wiring, providing easy network access to mobile users. You can set up a wireless network with other IEEE 802.11b/g/n compatible devices.

1.2 Applications

You can have the following networks on the WAP3205 v2:

- **Wired.** You can connect to a broadband modem/router for Internet access and/or connect network devices via the Ethernet ports of the WAP3205 v2 so that they can communicate with each other and access the Internet.
- **Wireless.** Wireless clients can connect to the WAP3205 v2 to access network resources.

Figure 1 WAP3205 v2 Network

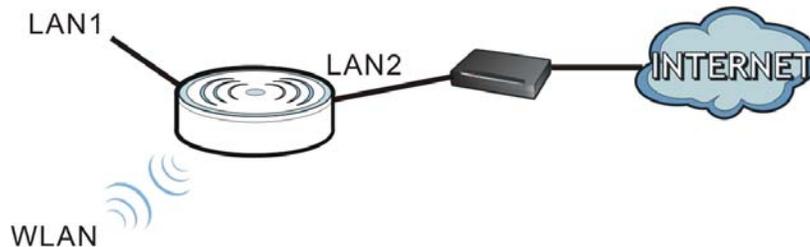

1.3 Ways to Manage the WAP3205 v2

Use any of the following methods to manage the WAP3205 v2.

- **Web Configurator.** This is recommended for everyday management of the WAP3205 v2 using a (supported) web browser.
- **WPS (Wi-Fi Protected Setup) button.** You can use the WPS button or the WPS section of the Web Configurator to set up a wireless network with your WAP3205 v2.

1.4 Good Habits for Managing the WAP3205 v2

Do the following things regularly to make the WAP3205 v2 more secure and to manage the WAP3205 v2 more effectively.

- Change the password. Use a password that's not easy to guess and that consists of different types of characters, such as numbers and letters.
- Write down the password and put it in a safe place.
- Back up the configuration (and make sure you know how to restore it). Restoring an earlier working configuration may be useful if the device becomes unstable or even crashes. If you forget your password, you will have to reset the WAP3205 v2 to its factory default settings. If you backed up an earlier configuration file, you would not have to totally re-configure the WAP3205 v2. You could simply restore your last configuration.

1.5 Resetting the WAP3205 v2

If you forget your password or IP address, or you cannot access the Web Configurator, you will need to use the **RESET** button at the back of the WAP3205 v2 to reload the factory-default configuration file. This means that you will lose all configurations that you had previously saved, the password will be reset to "1234" and the WAP3205 v2 will be reset to obtain an IP address from a DHCP server.

1.5.1 Procedure to Use the Reset Button

- 1 Make sure the power LED is on.
- 2 Press the **RESET** button for one to five seconds to reboot the WAP3205 v2.
- 3 Press the **RESET** button for longer than five seconds to set the WAP3205 v2 back to its factory-default configurations.

1.6 The WPS Button


You can use the WPS button () on the front panel of the WAP3205 v2 to activate WPS in order to quickly set up a wireless network with strong security.

- 1 Make sure the power LED is on (not blinking).
- 2 Press the WPS button for more than three seconds and release it. Press the WPS button on another WPS-enabled device within range of the WAP3205 v2.

Note: You must activate WPS in the WAP3205 v2 that acts as the AP and in another wireless device within two minutes of each other.

1.7 LEDs

Figure 2 Front Panel

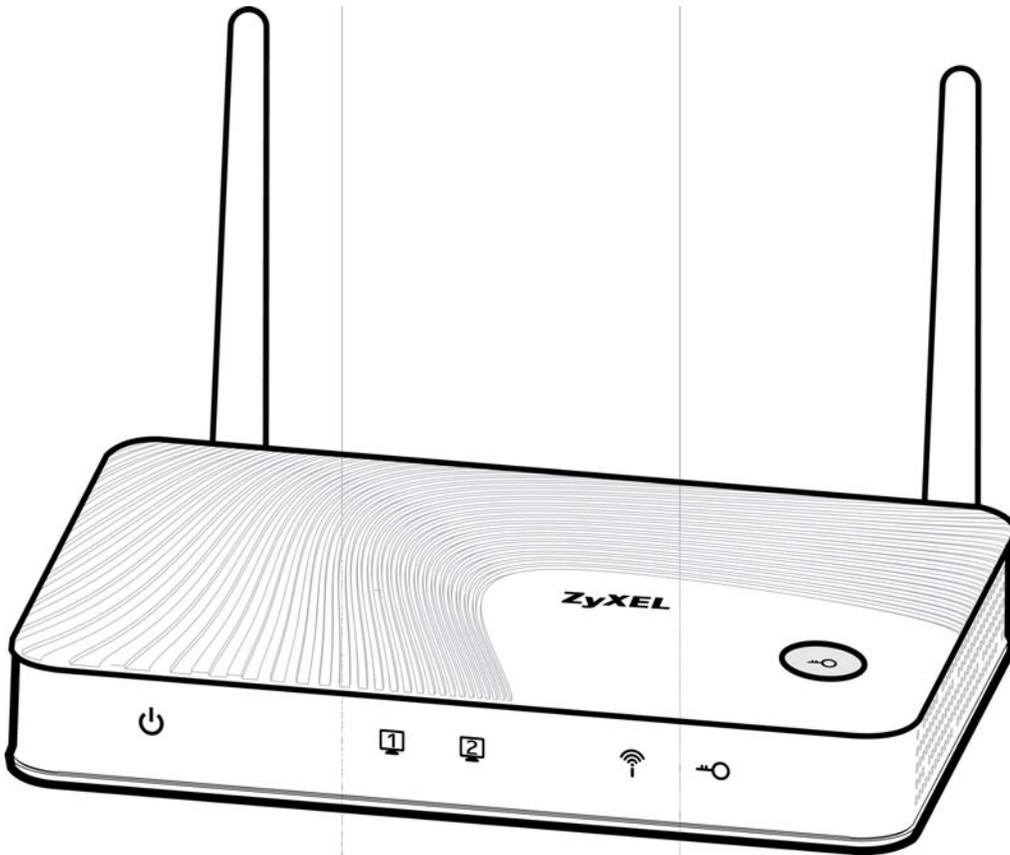

The following table describes the LEDs and the WPS button.

Table 1 Front Panel LEDs and WPS Button

LED	COLOR	STATUS	DESCRIPTION
Power 	Green	On	The WAP3205 v2 is receiving power and starts up.
		Blinking	The WAP3205 v2 is in the process of default restoring.
		Off	The WAP3205 v2 is not receiving power.
LAN 1-2  	Green	On	The WAP3205 v2 has a successful 10/100MB Ethernet connection.
		Blinking	The WAP3205 v2 is sending/receiving data through the LAN.
		Off	The LAN is not connected.
WLAN 	Green	On	The WAP3205 v2 is ready, but is not sending/receiving data through the wireless LAN.
		Blinking	The WAP3205 v2 is sending/receiving data through the wireless LAN.
		Off	The wireless LAN is not ready or has failed.

Table 1 Front Panel LEDs and WPS Button

LED	COLOR	STATUS	DESCRIPTION
WPS 	Green	On	WPS is enabled.
		Blinking	The WAP3205 v2 is negotiating a WPS connection with a wireless client.
		Off	WPS is disabled.

1.8 Wall Mounting

You may need screw anchors if mounting on a concrete or brick wall.

Table 2 Wall Mounting Information

Distance between holes	11 cm
M4 Screws	Two
Screw anchors (optional)	Two


- 1 Select a position free of obstructions on a wall strong enough to hold the weight of the device.
- 2 Mark two holes on the wall at the appropriate distance apart for the screws.

Be careful to avoid damaging pipes or cables located inside the wall when drilling holes for the screws.

- 3 If using screw anchors, drill two holes for the screw anchors into the wall. Push the anchors into the full depth of the holes, then insert the screws into the anchors. Do not insert the screws all the way in - leave a small gap of about 0.5 cm.

If not using screw anchors, use a screwdriver to insert the screws into the wall. Do not insert the screws all the way in - leave a gap of about 0.5 cm.

- 4 Make sure the screws are fastened well enough to hold the weight of the WAP3205 v2 with the connection cables.
- 5 Align the holes on the back of the WAP3205 v2 with the screws on the wall. Hang the WAP3205 v2 on the screws.

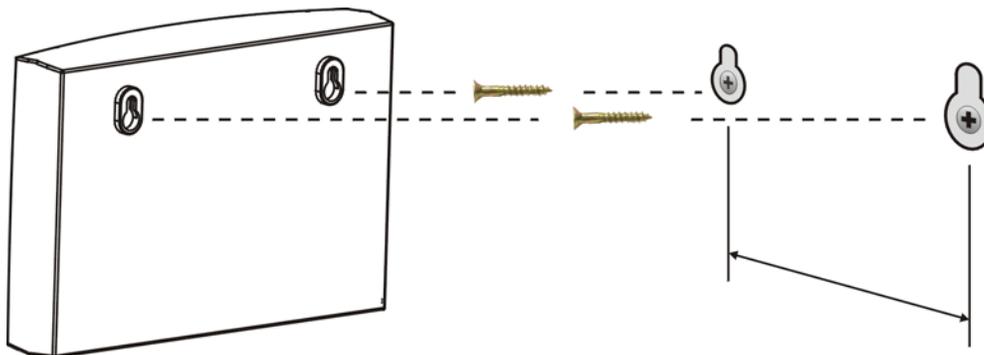Figure 3 Wall Mounting Example

WAP3205 v2 Modes

2.1 Overview

This chapter introduces the different modes available on your WAP3205 v2.

- **Device mode.** This is the operating mode of your WAP3205 v2, or simply how the WAP3205 v2 is being used in the network.

2.1.1 Device Modes


This refers to the operating mode of the WAP3205 v2, which can act as a:

- **Access Point.** Use this mode if you want to extend your network by allowing network devices to connect to the WAP3205 v2 wirelessly. Go to [Section 3.5 on page 16](#) to view the **Status** screen in this mode.

In this mode, you can also set the WAP3205 v2 to work as an AP only, a wireless bridge to establish wireless links with other APs (WDS bridge), or an AP and bridge simultaneously (WDS repeater). See [Section 10.12 on page 91](#) for more information.

- **Client.** Use this mode if there is an existing wireless router or access point in the network to which you want to connect your local network. Go to [Section 4.5 on page 22](#) to view the **Status** screen in this mode. In Client mode, you should know the SSID and wireless security details of the access point to which you want to connect.
- **Universal Repeater.** In this mode, the WAP3205 v2 can be an access point and a wireless client at the same time. Use this mode if there is an existing wireless router or access point in your network and you also want to allow clients to connect to the WAP3205 v2 wirelessly. Go to [Section 4.5 on page 22](#) to view the **Status** screen in this mode.

The following figure is a simple illustration of the device operating modes of the WAP3205 v2.

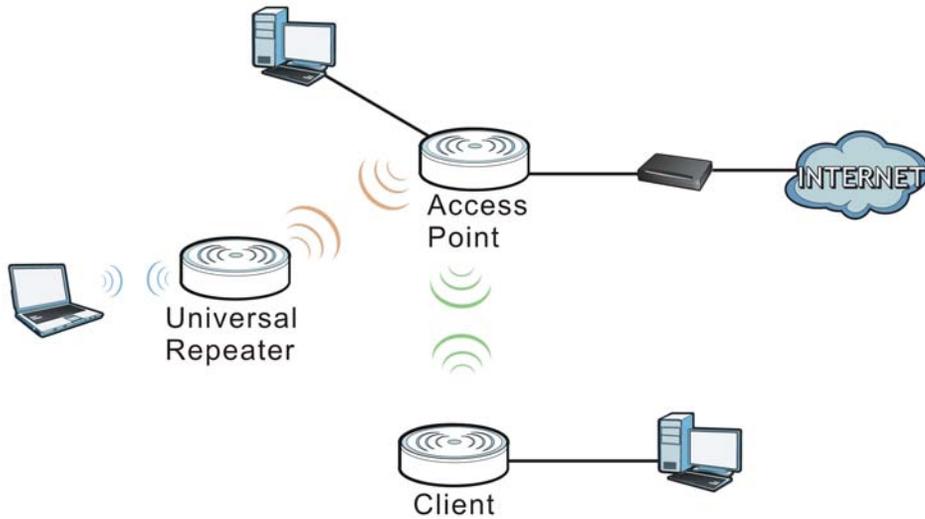Figure 4 Device Operating Mode Example

Note: Choose your device mode carefully to avoid having to change it later.

2.1.1.1 Changing Operating Mode

Push the **AP UR CL** switch on the WAP3205 v2's side panel to the **AP** position to have the WAP3205 v2 act as an access point. Push the switch to the **CL** position to have the WAP3205 v2 work as a universal repeater. Otherwise, push the switch to the **CL** position to have the WAP3205 v2 work as a wireless client.

The WAP3205 v2 restarts automatically after you change operating modes.


Figure 5 Side Panel

Access Point Mode

3.1 Overview

The WAP3205 v2 is set to access point mode by default. In this mode your WAP3205 v2 bridges a wired network (LAN) and wireless LAN (WLAN) in the same subnet. See the figure below for an example.

Figure 6 Wireless Internet Access in Access Point Mode

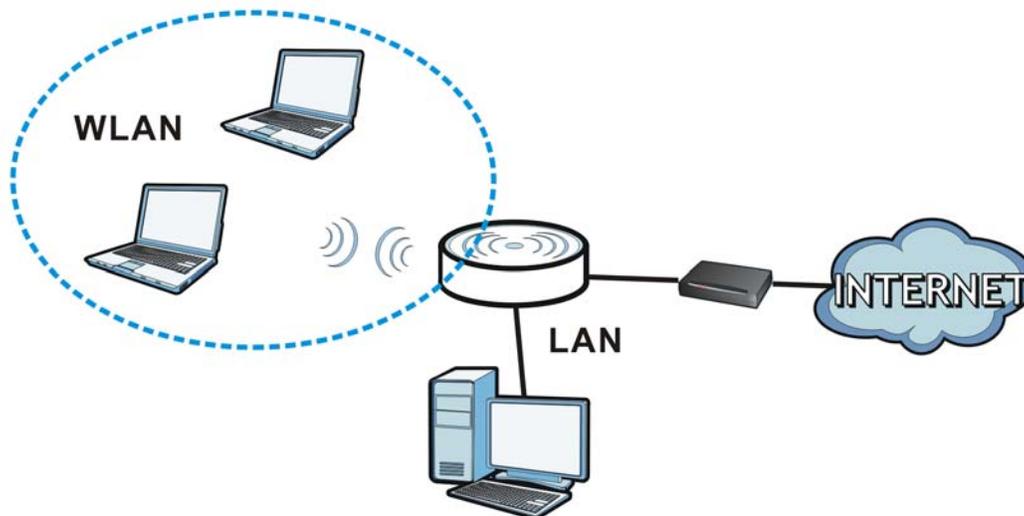

Note: See [Chapter 8 on page 54](#) for an example of setting up a wireless network in Access Point mode.

3.2 What You Can Do

- Use the **Status** screen ([Section 3.5 on page 16](#)) to view read-only information about your WAP3205 v2.
- Use the **LAN** screen ([Chapter 11 on page 94](#)) to set the IP address for your WAP3205 v2 acting as an access point.
- Use the **Wireless LAN** screens ([Chapter 10 on page 76](#)) to configure the wireless settings and wireless security between the wireless clients and the WAP3205 v2.

3.3 What You Need to Know

See [Chapter 8 on page 54](#) for a tutorial on setting up a network with the WAP3205 v2 as an access point.

3.4 Setting your WAP3205 v2 to AP Mode

- 1 To use your WAP3205 v2 as an access point, see [Section 2.1.1.1 on page 14](#).
- 2 Connect your computer to the LAN port of the WAP3205 v2.
- 3 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.
- 4 Enter "1234" (default) as the password and click **Login**.
- 5 Type a new password and retype it to confirm, then click **Apply**. Otherwise, click **Ignore**.

3.4.1 Configuring your WLAN, LAN and Maintenance Settings

- See [Chapter 10 on page 76](#) and [Chapter 11 on page 94](#) for information on the configuring your wireless network and LAN settings.
- See [Chapter 12 on page 99](#) for information on configuring your Maintenance settings.

3.5 AP Mode Status Screen

Click  to open the **Status** screen.

Figure 7 Status Screen: Access Point Mode

The screenshot shows the ZyXEL WAP3205 v2 Status screen. At the top, it says 'ZyXEL WAP3205 v2' and 'Welcome: Admin | Logout | Home | About | eaZy123'. There is a 'Refresh Interval' dropdown set to 'None' and a 'Refresh Now' button. The main content is divided into three sections:

- Device Information:** A table with columns 'Item' and 'Data'.

Item	Data
Host Name:	WAP3205v2
Firmware Version:	V1.00(AAEX.0)
Sys OP Mode:	Access Point Mode
LAN Information:	
- MAC Address:	CC:5D:4E:04:18:04
- IP Address:	192.168.1.2
- IP Subnet Mask:	255.255.255.0
- Default Gateway:	0.0.0.0
- DHCP:	None
WLAN Information:	
- WLAN OP Mode:	Access Point Mode
- MAC Address:	CC:5D:4E:04:18:04
- Status:	ON
- Name(SSID):	ZyXEL041804
- Channel:	Auto Channel
- Operating Channel:	Channel-11 2462MHz
- Security Mode:	No Security
- 802.11 Mode:	802.11b/g/n
- WPS:	Unconfigured
- System Status:** A table with columns 'Item' and 'Data'.

Item	Data
System Up Time:	2 mins, 44 secs
Current Date/Time:	2000-01-01 / 00:06:19
System Resource:	
- CPU Usage:	60%
- Memory Usage:	37%
System Setting:	
- Configuration Mode:	Expert
- Interface Status:** A table with columns 'Interface', 'Status', and 'Rate'.

Interface	Status	Rate
LAN	Up	100M
WLAN	Up	300M

At the bottom right, there is a 'Summary' section with links for 'Packet Statistics (Details...)' and 'WLAN Station Status (Details...)'.

The following table describes the icons shown in the **Status** screen.

Table 3 Status Screen Icon Key: Access Point Mode

ICON	DESCRIPTION
	Click this to go to the Home page.
	Click this icon to view copyright and a link for related product information.
	Click this icon to open the wizard. See Chapter 7 on page 45 .
	Select a number of seconds or None from the drop-down list box to refresh all screen statistics automatically at the end of every time interval or to not refresh the screen statistics.
	Click this button to refresh the status screen statistics.
	Click this icon to see the Status page. The information in this screen depends on the device mode you select.
	Click this icon to see the Monitor navigation menu.
	Click this icon to see the Configuration navigation menu.
	Click this icon to see the Maintenance navigation menu.

The following table describes the labels shown in the **Status** screen.

Table 4 Status Screen: Access Point Mode

LABEL	DESCRIPTION
Logout	Click this at any time to exit the Web Configurator.
Device Information	
Host Name	This is the WAP3205 v2's model name.
Firmware Version	This is the firmware version and the date created.
Sys OP Mode	This is the device mode (Section 2.1.1 on page 13) to which the WAP3205 v2 is set - Access Point Mode .
LAN Information	
MAC Address	This shows the LAN Ethernet adapter MAC Address of your device.
IP Address	This shows the LAN port's IP address.
IP Subnet Mask	This shows the LAN port's subnet mask.
Default Gateway	This shows the gateway IP address.
DHCP	This shows the LAN port's DHCP role - Client or None .
WLAN Information	
WLAN OP Mode	This is the device mode (Section 2.1.1 on page 13) to which the WAP3205 v2's wireless LAN is set - Access Point Mode .
MAC Address	This shows the wireless adapter MAC Address of your device.
Status	This shows the current status of the Wireless LAN - ON .
Name (SSID)	This shows a descriptive name used to identify the WAP3205 v2 in the wireless LAN.
Channel	This shows the channel number which you select manually or the WAP3205 v2 automatically scans and selects.
Operating Channel	This shows the channel number which the WAP3205 v2 is currently using over the wireless LAN.
Security Mode	This shows the level of wireless security the WAP3205 v2 is using.
802.11 Mode	This shows the wireless standard.
WPS	This displays Configured when the WPS has been set up. This displays Unconfigured if the WPS has not been set up. Click the status to display Network > Wireless LAN > WPS screen.
Interface Status	
Interface	This displays the WAP3205 v2 port types. The port types are: LAN and WLAN .
Status	For the LAN ports, this field displays Down (line is down) or Up (line is up or connected). For the WLAN, it displays Up when the WLAN is enabled or Down when the WLAN is disabled.
Rate	For the LAN ports, this displays the port speed or N/A when the line is disconnected. For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and N/A when the WLAN is disabled.
System Status	
Item	This column shows the type of data the WAP3205 v2 is recording.
Data	This column shows the actual data recorded by the WAP3205 v2.
System Up Time	This is the total time the WAP3205 v2 has been on.
Current Date/Time	This field displays your WAP3205 v2's present date and time.
System Resource	


Table 4 Status Screen: Access Point Mode

LABEL	DESCRIPTION
CPU Usage	This displays what percentage of the WAP3205 v2's processing ability is currently used. When this percentage is close to 100%, the WAP3205 v2 is running at full load, and the throughput is not going to improve anymore. If you want some applications to have more throughput, you should turn off other applications (for example, using bandwidth management).
Memory Usage	This shows what percentage of the heap memory the WAP3205 v2 is using.
System Setting	
Configuration Mode	This shows the web configurator mode you are viewing - Expert .
Summary	
Packet Statistics	Click Details... to go to the Monitor > Packet Statistics screen (Section 9.4 on page 73). Use this screen to view port status and packet specific statistics.
WLAN Station Status	Click Details... to go to the Monitor > WLAN Station Status screen (Section 9.5 on page 74). Use this screen to view the wireless stations that are currently associated to the WAP3205 v2.

3.5.1 Navigation Panel

Use the menu in the navigation panel to configure WAP3205 v2 features in Access Point mode.

The following screen and table show the features you can configure in Access Point mode.

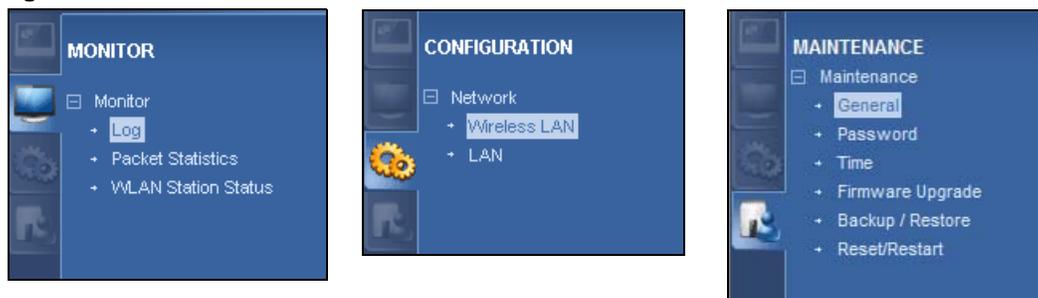Figure 8 Menu: Access Point Mode

The following table describes the sub-menus.

Table 5 Navigation Panel: Access Point Mode

LINK	TAB	FUNCTION
Status		This screen shows the WAP3205 v2's general device, system and interface status information. Use this screen to access the wizard, and summary statistics tables.
MONITOR		
Log		Use this screen to view the list of activities recorded by your WAP3205 v2.
Packet Statistics		Use this screen to view port status and packet specific statistics.
WLAN Station Status		Use this screen to view the wireless stations that are currently associated to the WAP3205 v2.
CONFIGURATION		
Network		

Table 5 Navigation Panel: Access Point Mode

LINK	TAB	FUNCTION
Wireless LAN	General	Use this screen to configure general wireless LAN settings.
	Security	Use this screen to configure wireless security settings.
	MAC Filter	Use the MAC filter screen to configure the WAP3205 v2 to block access to devices or block the devices from accessing the WAP3205 v2.
	Advanced	This screen allows you to configure advanced wireless settings.
	QoS	Use this screen to configure Wi-Fi Multimedia Quality of Service (WMM QoS). WMM QoS allows you to prioritize wireless traffic according to the delivery requirements of individual services.
	WPS	Use this screen to configure WPS.
	WPS Station	Use this screen to add a wireless station using WPS.
	Scheduling	Use this screen to schedule the times the Wireless LAN is enabled.
	WDS	Use this screen to set up Wireless Distribution System (WDS) on your WAP3205 v2.
LAN	IP	Use this screen to configure LAN IP address and subnet mask.
	IP Alias	Use this screen to have the WAP3205 v2 apply IP alias to create LAN subnets.
	STP	Use this screen to enable or disable STP (Spanning Tree Protocol) on the WAP3205 v2.
MAINTENANCE		
General		Use this screen to view and change administrative settings such as system and domain names.
Password	Password Setup	Use this screen to change the password of your WAP3205 v2.
Time	Time Setting	Use this screen to change your WAP3205 v2's time and date.
Firmware Upgrade		Use this screen to upload firmware to your WAP3205 v2.
Backup/Restore		Use this screen to backup and restore the configuration or reset your WAP3205 v2 to the factory defaults.
Restart	Restart	This screen allows you to reboot the WAP3205 v2 without turning the power off.


Client Mode

4.1 Overview

Your WAP3205 v2 can act as a wireless client. In wireless client mode, it can connect to an existing network via an access point. Use this mode if you already have an access point or wireless router in your network.

In the example below, one WAP3205 v2 (**A**) is configured as a wireless client and another is used as an access point (**B**). The WAP3205 v2 has two clients that need to connect to the Internet. The WAP3205 v2 wirelessly connects to the available access point (**B**).

Figure 9 Wireless Client Mode

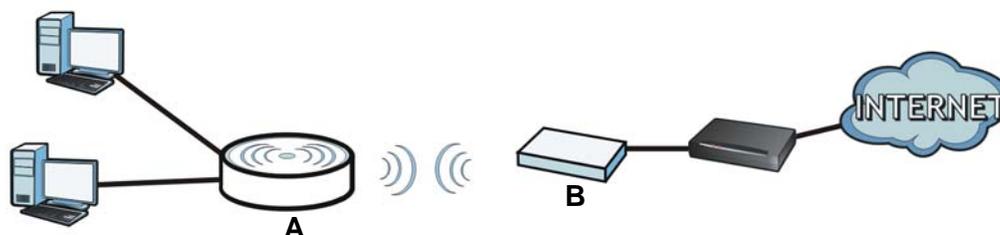

After the WAP3205 v2 and the access point connect, the WAP3205 v2 acquires its WAN IP address from the access point. The clients of the WAP3205 v2 can now surf the Internet.

4.2 What You Can Do

- Use the **Status** screen ([Section 4.5 on page 22](#)) to view read-only information about your WAP3205 v2.
- Use the **LAN** screen ([Chapter 11 on page 94](#)) to set the IP address for your WAP3205 v2.
- Use the **Wireless LAN** screen ([Section 4.6 on page 24](#)) to associate your WAP3205 v2 (acting as a wireless client) with an existing access point.

4.3 What You Need to Know

With the exception of the **Wireless LAN** screens, the **LAN**, **Monitor**, **Configuration** and **Maintenance** screens in Client mode are similar to the ones in Access Point Mode. See [Chapter 11 on page 94](#) through [Chapter 12 on page 99](#) of this User's Guide.

4.4 Setting your WAP3205 v2 to Client Mode

- 1 To use your WAP3205 v2 as a wireless client, see [Section 2.1.1.1 on page 14](#).
- 2 Connect your computer to the LAN port of the WAP3205 v2.
- 3 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.
- 4 Enter "1234" (default) as the password and click **Login**.
- 5 Type a new password and retype it to confirm, then click **Apply**. Otherwise, click **Ignore**.


Note: You have to log into the Web Configurator again when you change modes. As soon as you do, your WAP3205 v2 is already in Client mode.

Note: The client mode IP address is always the same as the access point mode IP address. If you changed the IP address of your WAP3205 v2 while in access point mode, use this IP address in client mode.

4.5 Client Mode Status Screen

Click  to open the status screen.

Figure 10 Status: Client Mode

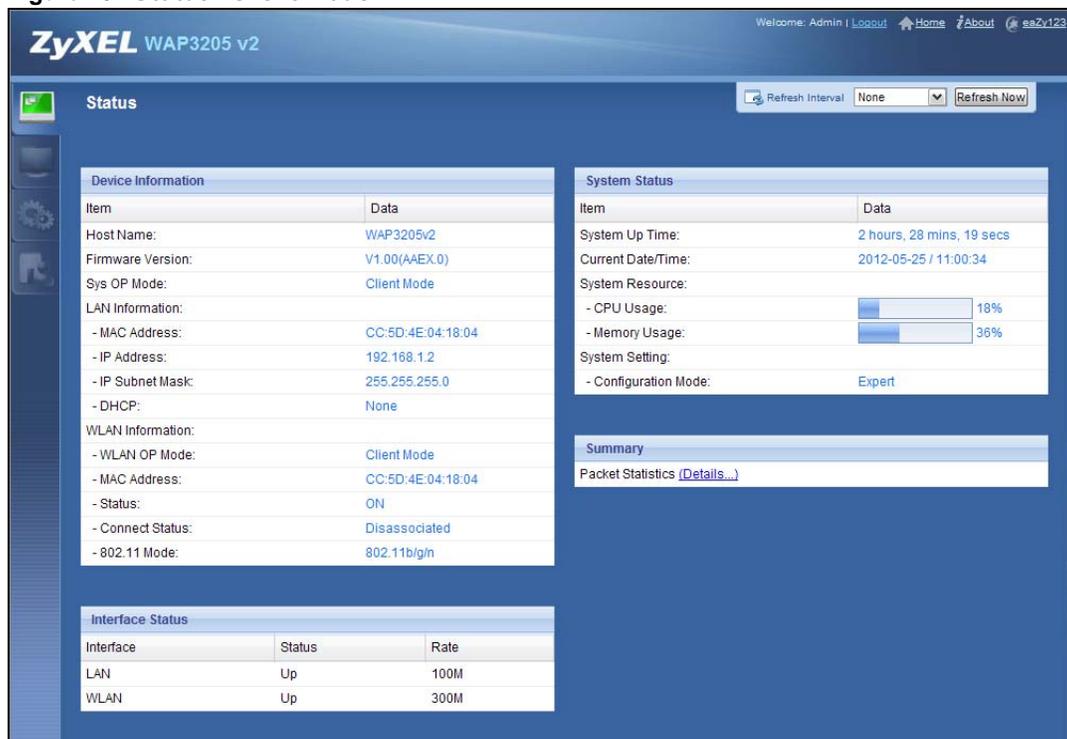

The screenshot shows the ZyXEL WAP3205 v2 web interface. The top navigation bar includes "Welcome: Admin | Logout | Home | About | @ eaZy123". The main content area is titled "Status" and features a "Refresh Interval" dropdown set to "None" and a "Refresh Now" button. The interface is divided into several sections:

- Device Information:** A table with columns "Item" and "Data".

Host Name:	WAP3205v2
Firmware Version:	V1.00(AAEX.0)
Sys OP Mode:	Client Mode
- LAN Information:** A table with columns "Item" and "Data".

- MAC Address:	CC:5D:4E:04:18:04
- IP Address:	192.168.1.2
- IP Subnet Mask:	255.255.255.0
- DHCP:	None
- WLAN Information:** A table with columns "Item" and "Data".

- WLAN OP Mode:	Client Mode
- MAC Address:	CC:5D:4E:04:18:04
- Status:	ON
- Connect Status:	Disassociated
- 802.11 Mode:	802.11b/g/n
- System Status:** A table with columns "Item" and "Data".

System Up Time:	2 hours, 28 mins, 19 secs
Current Date/Time:	2012-05-25 / 11:00:34
System Resource:	
- CPU Usage:	18%
- Memory Usage:	36%
System Setting:	
- Configuration Mode:	Expert
- Interface Status:** A table with columns "Interface", "Status", and "Rate".

Interface	Status	Rate
LAN	Up	100M
WLAN	Up	300M

At the bottom, there is a "Summary" section with a link for "Packet Statistics (Details...)"

The following table describes the labels shown in the **Status** screen.

Table 6 Status Screen: Client Mode

LABEL	DESCRIPTION
Logout	Click this at any time to exit the Web Configurator.
Device Information	
Host Name	This is the WAP3205 v2's model name.
Firmware Version	This is the firmware version and the date created.
Sys OP Mode	This is the device mode (Section 2.1.1 on page 13) to which the WAP3205 v2 is set - Client Mode .
LAN Information	
MAC Address	This shows the LAN Ethernet adapter MAC Address of your device.
IP Address	This shows the LAN port's IP address.
IP Subnet Mask	This shows the LAN port's subnet mask.
DHCP	This shows the LAN port's DHCP role - Client or None .
WLAN Information	
WLAN OP Mode	This is the device mode (Section 2.1.1 on page 13) to which the WAP3205 v2's wireless LAN is set - Client Mode .
MAC Address	This shows the wireless adapter MAC Address of your device.
Status	This shows the current status of the Wireless LAN - ON .
Connect Status	This shows whether or not the WAP3205 v2 has successfully associated with an access point - Connected or Disassociated .
802.11 Mode	This shows the wireless standard.
Interface Status	
Interface	This displays the WAP3205 v2 port types. The port types are: LAN and WLAN .
Status	For the LAN ports, this field displays Down (line is down) or Up (line is up or connected). For the WLAN, it displays Up when the WLAN is enabled or Down when the WLAN is disabled.
Rate	For the LAN ports, this displays the port speed or N/A when the line is disconnected. For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and N/A when the WLAN is disabled.
System Status	
Item	This column shows the type of data the WAP3205 v2 is recording.
Data	This column shows the actual data recorded by the WAP3205 v2.
System Up Time	This is the total time the WAP3205 v2 has been on.
Current Date/Time	This field displays your WAP3205 v2's present date and time.
System Resource	
CPU Usage	This displays what percentage of the WAP3205 v2's processing ability is currently used. When this percentage is close to 100%, the WAP3205 v2 is running at full load, and the throughput is not going to improve anymore. If you want some applications to have more throughput, you should turn off other applications (for example, using bandwidth management).
Memory Usage	This shows what percentage of the heap memory the WAP3205 v2 is using.
System Setting	
Configuration Mode	This shows the web configurator mode you are viewing - Expert .

Table 6 Status Screen: Client Mode

LABEL	DESCRIPTION
Summary	
Packet Statistics	Click Details... to go to the Monitor > Packet Statistics screen (Section 9.4 on page 73). Use this screen to view port status and packet specific statistics.

4.6 Wireless LAN Profile Screen

Use this screen to view the wireless LAN profile settings of your WAP3205 v2. Go to **Configuration > Wireless LAN > Profile** to open the following screen.

Figure 11 Client Mode: Wireless LAN > Profile

The following table describes the labels in this screen.

Table 7 Client Mode: Wireless LAN > Profile

LABEL	DESCRIPTION
Profile List	
#	Select a profile to remove, modify or enable it.
Profile	This displays the name of the pre-configured profile. <input checked="" type="checkbox"/> indicates the profile is activated and the WAP3205 v2 connects to the specified wireless network. <input checked="" type="checkbox"/> indicates the profile is activated but the specified wireless network is not available or the WAP3205 v2 fails to associate with the wireless network.
SSID	This displays the SSID of the wireless network with which this profile associates.
Channel	This displays the channel number used by this profile. Auto means the WAP3205 v2 automatically scans for and selects an available channel.
Authentication	This displays the authentication method used by this profile.
Encryption	This displays the data encryption method used by this profile.
Network Type	This displays the network type (Infrastructure or Ad Hoc) of this profile.
Add	Click this button to create a new profile.
Delete	Select a profile and click this button to remove it.
Edit	Select a profile and click this button to modify it.
Activate	Select a profile and click this button to enable it. Note: You can activate only one profile at a time.

4.6.1 Adding a New WLAN Profile

Use this screen to create a new wireless LAN profile for your WAP3205 v2. Click the **Add** button in the **Configuration > Wireless LAN > Profile** screen to open the following screen.

Figure 12 Client Mode: Wireless LAN > Profile > Add

The following table describes the labels in this screen.

Table 8 Client Mode: Wireless LAN > Profile > Add

LABEL	DESCRIPTION
Wireless Setup	
Profile Name	Enter a descriptive name for this profile.
Network Name (SSID)	Enter the name of the access point to which you are connecting. Click the Site Survey button to go to the Site Survey screen to see available wireless devices within transmission range.
Security	
Security Mode	Select the security mode of the access point to which you want to connect.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Back	Click Back to go back to the previous screen.

4.6.1.1 No Security

Use this screen if the access point to which you want to connect does not use encryption.

Figure 13 Client Mode: Wireless LAN > Profile: No Security

The following table describes the labels in this screen.

Table 9 Client Mode: Wireless LAN > Profile: No Security

LABEL	DESCRIPTION
Wireless Setup	
Profile Name	Enter a descriptive name for this profile.
Network Name (SSID)	Enter the name of the access point to which you are connecting. Click the Site Survey button to go to the Site Survey screen to see available wireless devices within transmission range.
Security	
Security Mode	Select No Security in this field.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Back	Click Back to go back to the previous screen.

4.6.1.2 Static WEP

Use this screen if the access point to which you want to connect to uses WEP security mode.

Figure 14 Client Mode: Wireless LAN > Profile: WEP

The screenshot shows the configuration interface for a WEP profile. At the top, there are tabs for 'Profile', 'Site Survey', and 'WPS'. The 'Profile' tab is active. Below the tabs, the 'Wireless Setup' section contains:

- Profile Name: PROF001
- Network Name (SSID): [Empty field] with a 'Site Survey' button to its right.

 The 'Security' section contains:

- Security Mode: Static WEP (dropdown menu)
- PassPhrase: [Empty field] with a 'Generate' button to its right.
- WEP Encryption: 64-bits (dropdown menu)
- Authentication Method: Open (dropdown menu)

 Below the security settings is a 'Note' section:

- Note:**
 - 64-bit WEP: Enter 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
 - 128-bit WEP: Enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
 - (Select one WEP key as an active key to encrypt wireless data transmission.)
- Radio buttons for ASCII and HEX.
- Four key selection options:
 - Key 1: [Empty field]
 - Key 2: [Empty field]
 - Key 3: [Empty field]
 - Key 4: [Empty field]

 At the bottom of the screen, there are 'Apply' and 'Back' buttons.

The following table describes the labels in this screen..

Table 10 Client Mode: Wireless LAN > Profile: WEP

LABEL	DESCRIPTION
Wireless Setup	
Profile Name	Enter a descriptive name for this profile.

Table 10 Client Mode: Wireless LAN > Profile: WEP

LABEL	DESCRIPTION
Network Name (SSID)	Enter the name of the access point to which you are connecting. Click the Site Survey button to go to the Site Survey screen to see available wireless devices within transmission range.
Security	
Security Mode	Select Static WEP to enable data encryption.
PassPhrase	Enter a passphrase (up to 26 printable characters) and click Generate . A passphrase functions like a password. In WEP security mode, it is further converted by the WAP3205 v2 into a complicated string that is referred to as the "key". This key is requested from all devices wishing to connect to a wireless network.
WEP Encryption	Select 64-bit WEP or 128-bit WEP . This dictates the length of the security key that the network is going to use.
Authentication Method	Select Open or Shared Key from the drop-down list box. This field specifies whether the wireless clients have to provide the WEP key to log into the wireless network. Keep this setting at Open unless you want to force a key verification before communication between the wireless client and the ZyXEL Device occurs. Select Shared Key to force the clients to provide the WEP key prior to communication.
ASCII	Select this option in order to enter ASCII characters as WEP key.
Hex	Select this option in order to enter hexadecimal characters as a WEP key. The preceding "0x", that identifies a hexadecimal key, is entered automatically.
Key 1 to Key 4	The WEP keys are used to encrypt data. Both the WAP3205 v2 and the wireless stations must use the same WEP key for data transmission. If you chose 64-bit WEP , then enter any 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F"). If you chose 128-bit WEP , then enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F"). You must configure at least one key, only one key can be activated at any one time. The default key is key 1.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Back	Click Back to go back to the previous screen.

4.6.1.3 WPA(2)-PSK

Use this screen if the access point to which you want to connect uses WPA(2)-PSK security mode.

Figure 15 Client Mode: Wireless LAN > Profile: WPA-PSK/WPA2-PSK

The following table describes the labels in this screen. .

Table 11 Client Mode: Wireless LAN > Profile: WPA-PSK/WPA2-PSK

LABEL	DESCRIPTION
Wireless Setup	
Profile Name	Enter a descriptive name for this profile.
Network Name (SSID)	Enter the name of the access point to which you are connecting. Click the Site Survey button to go to the Site Survey screen to see available wireless devices within transmission range.
Security	
Security Mode	Select WPA-PSK or WPA2-PSK to add strong security on this wireless network.
Encryption Type	Select the type of wireless encryption employed by the access point to which you want to connect.
Pre-Shared Key	WPA-PSK or WPA2-PSK uses a simple common password for authentication. Type the pre-shared key employed by the access point to which you want to connect.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Back	Click Back to go back to the previous screen.

4.7 Site Survey Screen

Use this screen to scan for and connect to a wireless network automatically. Go to **Configuration > Wireless LAN > Site Survey** to open the following screen.

Figure 16 Client Mode: Wireless LAN > Site Survey

#	SSID	BSSID	Signal Strength	Channel	Encryption	Authentication	Network Type
<input checked="" type="radio"/>	ZyXEL_Benny	00-13-49-C5-6E-08	10%	2	Not Use	OPEN	Infra.
<input type="radio"/>	ZyXEL_MIS	00-19-CB-4B-22-0F	39%	1	WEP	Unknown	Infra.
<input type="radio"/>	ZyXEL_MIS_WPA	06-19-CB-4B-22-0F	44%	1	TKIP; AES	WPA; WPA2	Infra.
<input type="radio"/>	ZyXEL_Guest	0A-19-CB-4B-22-0F	34%	1	TKIP; AES	WPA; WPA2	Infra.
<input type="radio"/>	ZyXEL_test_334SH	00-02-CF-98-6E-4C	10%	1	TKIP; AES	WPA-PSK; WPA2-PSK	Infra.
<input type="radio"/>	pqa-3260-p2602hwl	00-13-49-F5-1A-13	0%	3	AES	WPA2-PSK	Infra.
<input type="radio"/>	pqa-3237-test	00-19-CB-73-CC-BA	5%	4	TKIP	WPA-PSK	Infra.
<input type="radio"/>	TWexample	6E-A3-AB-58-F8-4F	91%	1	Not Use	OPEN	Ad Hoc

The following table describes the labels in this screen.

Table 12 Client Mode: Wireless LAN > Site Survey

LABEL	DESCRIPTION
Station Site Survey	
#	Select a wireless device and click Add Profile to open a configuration screen where you can add the selected wireless device to a profile and then enable it.
SSID	This displays the SSID of the wireless device. <input checked="" type="checkbox"/> indicates the wireless device is added to an activated profile and the WAP3205 v2 is connecting to it.
BSSID	This displays the MAC address of the wireless device.
Signal Strength	This displays the strength of the wireless signal. The signal strength mainly depends on the antenna output power and the distance between your WAP3205 v2 and this device.
Channel	This displays the channel number used by this wireless device.
Encryption	This displays the data encryption method used by this wireless device.
Authentication	This displays the authentication method used by this wireless device.
Network Type	This displays the network type (Infrastructure or Ad Hoc) of this wireless device.
Rescan	Click this button to search for available wireless devices within transmission range and update this table.
Add Profile	Select a wireless device and click this button to add it to a profile.

4.8 WPS Screen

Use this screen to enable Wi-Fi Protected Setup (WPS) on the WAP3205 v2. Go to **Configuration > Wireless LAN > WPS** to open the following screen.

Figure 17 Client Mode: Wireless LAN > WPS

Profile Site Survey WPS

Wi-Fi Protected Setup (STA)

Station Site Survey

No.	SSID	BSSID	Signal Strength	Ch.	Auth.	Encrypt	Ver.	Status
<input checked="" type="radio"/>	NBG6716_UXD	FCF528D3454C	100%	11	WPA2-PSK	AES	1.0	Conf.
<input type="radio"/>	ZyXEL_UXD	00E098CDD18	100%	1	WPA2-PSK	AES	1.0	Conf.
<input type="radio"/>	2G4A	0014798A204B	29%	10	WPA2-PSK	AES	1.0	Conf.

PIN: 33298009

The following table describes the labels in this screen.

Table 13 Client Mode: Wireless LAN > WPS

LABEL	DESCRIPTION
Station Site Survey	
#	Use the radio button to select the wireless device to which you want to connect using WPS.
SSID	This displays the SSID of the wireless device.
BSSID	This displays the MAC address of the wireless device.
Signal Strength	This displays the strength of the wireless signal. The signal strength mainly depends on the antenna output power and the distance between your WAP3205 v2 and this device.
Ch.	This displays the channel number used by this wireless device.
Auth.	This displays the authentication method used by this wireless device.
Encrypt	This displays the data encryption method used by this wireless device.
Ver.	This displays the firmware version running on the wireless device.
Status	This displays Conf. (configured) when WPS has been set up on the wireless device. This displays Unconf. (unconfigured) if WPS has not been set up on the wireless device.
PIN	This displays the PIN number of the WAP3205 v2.
Renew PIN	Click this button to generate a new PIN and display it in the PIN field.
PIN Start	Click this button to perform wireless security information synchronization using the PIN configuration method.
PBC Start	Click this button to perform wireless security information synchronization using the Push Button Configuration (PBC) method.
Rescan	Click this button to search for available for WPS-enabled devices within transmission range and update this table.


Universal Repeater Mode

5.1 Overview

In universal repeater mode, your WAP3205 v2 can act as an access point and wireless client at the same time. The WAP3205 v2 can connect to an existing network through another access point and also lets wireless clients connect to the network through it. This helps you expand wireless coverage when you have an access point or wireless router already in your network.

In the example below, the WAP3205 v2 (**A**) is configured as a universal repeater. It has three clients that want to connect to the Internet. The WAP3205 v2 wirelessly connects to the available access point (**B**).

Figure 18 Universal Repeater Mode

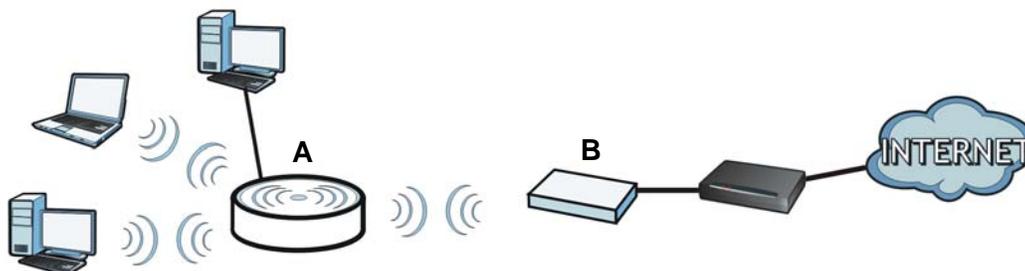

After the WAP3205 v2 and the access point connect, the WAP3205 v2 acquires its IP address from the access point. The clients of the WAP3205 v2 can now surf the Internet.

5.2 What You Can Do

- Use the **Status** screen ([Section 4.5 on page 22](#)) to view read-only information about your WAP3205 v2.
- Use the **LAN** screen ([Chapter 11 on page 94](#)) to set the IP address for your WAP3205 v2.
- Use the **Wireless LAN > WPS** screen ([Section 5.6 on page 34](#)) to configure WPS on the WAP3205 v2 to associate to another access point.
- Use the **Wireless LAN > Universal Repeater** screen ([Section 4.6 on page 24](#)) to configure the wireless security between the WAP3205 v2 and another access point.
- Use the **Wireless LAN > Site Survey** screen ([Section 5.8 on page 39](#)) to scan for available access points within transmission range.
- Use other **Wireless LAN** screens ([Chapter 10 on page 76](#)) to configure the wireless settings and wireless security between the wireless clients and the WAP3205 v2.

5.3 What You Need to Know

With the exception of the **WPS**, **Universal Repeater** and **Site Survey** screens under **Network > Wireless LAN**, other configuration screens in Universal Repeater mode are similar to the ones in Access Point Mode. See [Chapter 11 on page 94](#) through [Chapter 12 on page 99](#) of this User's Guide.

5.4 Setting your WAP3205 v2 to Universal Repeater Mode

- 1 To use your WAP3205 v2 as a universal repeater, see [Section 2.1.1.1 on page 14](#).
- 2 Connect your computer to the LAN port of the WAP3205 v2.
- 3 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.
- 4 Enter "1234" (default) as the password and click **Login**.
- 5 Type a new password and retype it to confirm, then click **Apply**. Otherwise, click **Ignore**.

Note: You have to log into the Web Configurator again when you change modes. As soon as you do, your WAP3205 v2 is already in Universal Repeater mode.

Note: The universal repeater mode IP address is always the same as the access point mode IP address. If you changed the IP address of your WAP3205 v2 while in access point mode, use this IP address in universal repeater mode.

5.5 Universal Repeater Mode Status Screen

Click  to open the status screen.

Figure 19 Status: Universal Repeater Mode

The screenshot displays the ZyXEL WAP3205 v2 Status page. At the top, it says 'ZyXEL WAP3205 v2' and 'Welcome: Admin | Logout | Home | About | eeZy123'. There is a 'Refresh Interval' dropdown set to 'None' and a 'Refresh Now' button. The main content is divided into three sections:

- Device Information:** A table with columns 'Item' and 'Data'.

Item	Data
Host Name:	WAP3205v2
Firmware Version:	V1.00(AAEX.0)
Sys OP Mode:	Universal Repeater Mode
LAN Information:	
- MAC Address:	CC:5D:4E:04:18:04
- IP Address:	192.168.1.2
- IP Subnet Mask:	255.255.255.0
- DHCP:	None
WLAN Information:	
- WLAN OP Mode:	Universal Repeater Mode
- MAC Address:	CC:5D:4E:04:18:04
- Status:	ON
- Name(SSID):	ZyXEL041804
- Channel:	Auto Channel
- Operating Channel:	Channel-11 2462MHz
- Security Mode:	No Security
- 802.11 Mode:	802.11b/g/n
- WLAN Station Status:	(32:19:CB:88:82:08)
- System Status:** A table with columns 'Item' and 'Data'.

Item	Data
System Up Time:	11 mins, 13 secs
Current Date/Time:	2000-01-01 / 00:12:48
System Resource:	
- CPU Usage:	8%
- Memory Usage:	36%
System Setting:	
- Configuration Mode:	Expert
- Interface Status:** A table with columns 'Interface', 'Status', and 'Rate'.

Interface	Status	Rate
LAN	Up	100M
WLAN	Up	300M

There is also a 'Summary' section with links for 'Packet Statistics (Details...)' and 'WLAN Station Status (Details...)'.

The following table describes the labels shown in the **Status** screen.

Table 14 Status Screen: Universal Repeater Mode

LABEL	DESCRIPTION
Logout	Click this at any time to exit the Web Configurator.
Device Information	
Host Name	This is the WAP3205 v2's model name.
Firmware Version	This is the firmware version and the date created.
Sys OP Mode	This is the device mode (Section 2.1.1 on page 13) to which the WAP3205 v2 is set - Universal Repeater Mode .
LAN Information	
MAC Address	This shows the LAN Ethernet adapter MAC Address of your device.
IP Address	This shows the LAN port's IP address.
IP Subnet Mask	This shows the LAN port's subnet mask.
DHCP	This shows the LAN port's DHCP role - Client or None .
WLAN Information	
WLAN OP Mode	This is the device mode (Section 2.1.1 on page 13) to which the WAP3205 v2's wireless LAN is set - Universal Repeater Mode .
MAC Address	This shows the wireless adapter MAC Address of your device.
Status	This shows the current status of the Wireless LAN - ON .

Table 14 Status Screen: Universal Repeater Mode

LABEL	DESCRIPTION
Name (SSID)	This shows a descriptive name used to identify the WAP3205 v2 in the wireless LAN.
Channel	This shows the channel number which you select manually or the WAP3205 v2 automatically scans and selects.
Operating Channel	This shows the channel number which the WAP3205 v2 is currently using over the wireless LAN.
Security Mode	This shows the level of wireless security the WAP3205 v2 is using.
802.11 Mode	This shows the wireless standard.
WLAN Station Status	This shows the SSID and MAC address of the AP or wireless router with which the WAP3205 v2 is currently associated. Otherwise, it displays Disassociated .
Interface Status	
Interface	This displays the WAP3205 v2 port types. The port types are: LAN and WLAN .
Status	For the LAN ports, this field displays Down (line is down) or Up (line is up or connected). For the WLAN, it displays Up when the WLAN is enabled or Down when the WLAN is disabled.
Rate	For the LAN ports, this displays the port speed or N/A when the line is disconnected. For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and N/A when the WLAN is disabled.
System Status	
Item	This column shows the type of data the WAP3205 v2 is recording.
Data	This column shows the actual data recorded by the WAP3205 v2.
System Up Time	This is the total time the WAP3205 v2 has been on.
Current Date/Time	This field displays your WAP3205 v2's present date and time.
System Resource	
CPU Usage	This displays what percentage of the WAP3205 v2's processing ability is currently used. When this percentage is close to 100%, the WAP3205 v2 is running at full load, and the throughput is not going to improve anymore. If you want some applications to have more throughput, you should turn off other applications (for example, using bandwidth management).
Memory Usage	This shows what percentage of the heap memory the WAP3205 v2 is using.
System Setting	
Configuration Mode	This shows the web configurator mode you are viewing - Expert .
Summary	
Packet Statistics	Click Details... to go to the Monitor > Packet Statistics screen (Section 9.4 on page 73). Use this screen to view port status and packet specific statistics.
WLAN Station Status	Click Details... to go to the Monitor > WLAN Station Status screen (Section 9.5 on page 74). Use this screen to view the wireless stations that are currently associated to the WAP3205 v2.

5.6 WPS Screen

Use this screen to connect to another AP using WPS. Go to **Configuration > Wireless LAN > WPS** to open the following screen.

Note: Wireless clients cannot use WPS to set up a wireless network with the WAP3205 v2 in universal repeater mode.

Figure 20 Universal Repeater: WLAN > WPS

WPS Setup

Enable WPS

Station Site Survey

#	SSID	BSSID	Signal Strength	Channel	Encryption	Authentication	WPS State
<input type="radio"/>	ZyXEL_UXD	00:E0:98:CD:CD:18	100%	1	AES	WPA2-PSK	YES
<input type="radio"/>	P-2812HNU-F1-90	C8:6C:87:B8:C3:64	44%	4	AES	WPA2-PSK	YES
<input type="radio"/>	TTNET_ZyXEL_34567	C8:6C:87:D7:51:13	39%	7	TKIPAES	WPA-PSK; WPA2-PSK	YES

PIN: 92135338

The following table describes the labels in this screen.


Table 15 Universal Repeater: WLAN > WPS

LABEL	DESCRIPTION
WPS Setup	
Enable WPS	Select this to turn on the WPS feature.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Station Site Survey	
#	Use the radio button to select the wireless device to which you want to connect using WPS.
SSID	This displays the SSID of the wireless device.
BSSID	This displays the MAC address of the wireless device.
Signal Strength	This displays the strength of the wireless signal. The signal strength mainly depends on the antenna output power and the distance between your WAP3205 v2 and this device.
Channel	This displays the channel number used by this wireless device.
Encryption	This displays the data encryption method used by this wireless device.
Authentication	This displays the authentication method used by this wireless device.
WPS State	This displays YES (configured) when WPS has been set up on the wireless device. This displays NO (unconfigured) if WPS has not been set up on the wireless device.
PIN	This displays the PIN number of the WAP3205 v2.
Renew PIN	Click this button to generate a new PIN and display it in the PIN field.
PIN Start	Click this button to perform wireless security information synchronization using the PIN configuration method.
PBC Start	Click this button to perform wireless security information synchronization using the Push Button Configuration (PBC) method.
Rescan	Click this button to search for available for WPS-enabled devices within transmission range and update this table.

5.7 Universal Repeater Screen

Use this screen to enter the SSID and select the wireless security mode used by the wireless device to which you want to connect. Go to **Configuration > Wireless LAN > Universal Repeater** to open the **Universal Repeater** screen. The screen varies depending on security mode.

Note: To have wireless clients access or acquire an IP address from another access point or wireless router (**B**) through the WAP3205 v2 (**A**) in universal repeater mode, you must set the channel number in the **Wireless LAN > General** and **Wireless LAN > Universal Repeater** screens to be the same as the one on the wireless router or AP to which the WAP3205 v2 wants to connect.

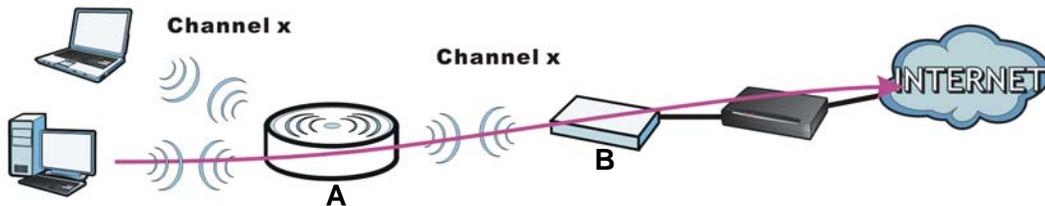

5.7.1 No Security

Figure 21 Universal Repeater Mode: Wireless LAN > Universal Repeater: No Security

The following table describes the labels in this screen.

Table 16 Universal Repeater Mode: Wireless LAN > Universal Repeater: No Security

LABEL	DESCRIPTION
Universal Repeater Parameters	
Enable	Select this option to have the WAP3205 v2 connect to the specified access point.
WLAN STA setting overwrites WLAN AP setting	Select the check box to have the WAP3205 v2 copy the SSID and wireless security settings of the associated AP, and use them for wireless connections between the WAP3205 v2 and its wireless clients. The new settings will display in the Wireless LAN > General screen. Otherwise, clear the check box to configure different wireless and security settings in the Wireless LAN > General screen for wireless connections between the WAP3205 v2 and its wireless clients.
SSID	Enter the name of the access point to which you are connecting.
MAC Address (Optional)	Enter the MAC address of the access point to which you are connecting.

Table 16 Universal Repeater Mode: Wireless LAN > Universal Repeater: No Security

LABEL	DESCRIPTION
Channel Selection	Set the operating frequency/channel depending on your particular region. Select a channel from the drop-down list box. The options vary depending on the frequency band and the country you are in.
Security Mode	Select No Security if the access point to which you want to connect does not use encryption.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

5.7.2 Static WEP

Figure 22 Universal Repeater Mode: Wireless LAN > Universal Repeater: Static WEP

Universal Repeater Parameters

Enable

SSID

MAC Address (Optional)

Channel Selection :

Security Mode

PassPhrase

WEP Encryption

Encryption Type

Note:

64-bit WEP: Enter 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F") for each Key (1-4).

128-bit WEP: Enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F") for each Key (1-4).

(Select one WEP key as an active key to encrypt wireless data transmission.)

ASCII HEX

Key 1

Key 2

Key 3

Key 4

The following table describes the labels in this screen.

Table 17 Universal Repeater Mode: Wireless LAN > Universal Repeater: Static WEP

LABEL	DESCRIPTION
Universal Repeater Parameters	
Enable	Select this option to have the WAP3205 v2 connect to the specified access point.
SSID	Enter the name of the access point to which you are connecting.
MAC Address (Optional)	Enter the MAC address of the access point to which you are connecting.

Table 17 Universal Repeater Mode: Wireless LAN > Universal Repeater: Static WEP

LABEL	DESCRIPTION
Channel Selection	Set the operating frequency/channel depending on your particular region. Select a channel from the drop-down list box. The options vary depending on the frequency band and the country you are in.
Security Mode	Select Static WEP if the access point to which you want to connect uses WEP data encryption.
PassPhrase	Enter a passphrase (up to 26 printable characters) and click Generate . A passphrase functions like a password. In WEP security mode, it is further converted by the WAP3205 v2 into a complicated string that is referred to as the "key". This key is requested from all devices wishing to connect to a wireless network.
WEP Encryption	Select 64-bits or 128-bits . This dictates the length of the security key that the network is going to use.
Encryption Type	Select Open or Shared Key from the drop-down list box. This field specifies whether the wireless clients have to provide the WEP key to log into the wireless network. Keep this setting at Open unless you want to force a key verification before communication between the wireless client and the ZyxEL Device occurs. Select Shared Key to force the clients to provide the WEP key prior to communication.
ASCII	Select this option in order to enter ASCII characters as WEP key.
Hex	Select this option in order to enter hexadecimal characters as a WEP key. The preceding "0x", that identifies a hexadecimal key, is entered automatically.
Key 1 to Key 4	The WEP keys are used to encrypt data. Both the WAP3205 v2 and the access point must use the same WEP key for data transmission. If you chose HEX , enter 10 or 26 hexadecimal characters in the range of "A-F", "a-f" and "0-9" (for example, 11AA22BB33) for a 64-bit or 128-bit WEP key respectively. If you chose ASCII , enter any 5 or 13 ASCII characters (case sensitive) ranging from "a-z", "A-Z" and "0-9" (for example, MyKey) for a 64-bit or 128-bit WEP key respectively. Select a default WEP key to use for data encryption. You must configure at least one key, only one key can be activated at any one time. The default key is key 1.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

5.7.3 WPA(2)-PSK

Figure 23 Universal Repeater Mode: Wireless LAN > Universal Repeater: WPA(2)-PSK

The screenshot shows a configuration window with the following elements:

- Navigation Tabs:** General, Security, MAC Filter, Advanced, QoS, WPS, Scheduling, Universal Repeater (selected), Site Survey.
- Section Header:** Universal Repeater Parameters
- Enable:** Enable
- SSID:**
- MAC Address (Optional):**
- Channel Selection :** Channel-11 2462MHz (dropdown)
- Security Mode:** WPA2-PSK (dropdown)
- Encryption Type:** TKIP AES
- Pre-Shared Key:**
- Buttons:** Apply, Cancel

The following table describes the labels in this screen.

Table 18 Universal Repeater Mode: Wireless LAN > Universal Repeater: WPA(2)-PSK

LABEL	DESCRIPTION
Universal Repeater Parameters	
Enable	Select this option to have the WAP3205 v2 connect to the specified access point.
SSID	Enter the name of the access point to which you are connecting.
MAC Address (Optional)	Enter the MAC address of the access point to which you are connecting.
Channel Selection	Set the operating frequency/channel depending on your particular region. Select a channel from the drop-down list box. The options vary depending on the frequency band and the country you are in.
Security Mode	Select WPA-PSK or WPA2-PSK if the access point to which you want to connect uses WPA-PSK or WPA2-PSK.
Encryption Type	Select the type of wireless encryption employed by the access point to which you want to connect.
Pre-Shared Key	WPA-PSK or WPA2-PSK uses a simple common password for authentication. Type the password employed by the access point to which you want to connect.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

5.8 Site Survey Screen

Use this screen to scan for and connect to a wireless network automatically. Go to **Configuration > Wireless LAN > Site Survey** to open the following screen.

Figure 24 Universal Repeater Mode: Wireless LAN > Site Survey

Station Site Survey							
#	SSID	BSSID	Signal Strength	Channel	Encryption	Authentication	Network Type
<input type="radio"/>	marcom	28:CF:DA:B6:4A:C5	60%	1	AES	WPA2-PSK	In
<input type="radio"/>	Will_IT_Test	40:4A:03:05:82:1F	29%	1	Not Use	NONE	In
<input type="radio"/>	ZyXEL_MIS_WPA_PSK	12:19:CB:42:B4:DE	86%	1	AES	WPA2-PSK	In
<input type="radio"/>	ZyXEL_MIS	32:19:CB:42:B4:DE	91%	1	WEP	Unknown	In
<input type="radio"/>	ZyXEL_MIS_WPA	22:19:CB:42:B4:DE	91%	1		WPA2/AES	In
<input type="radio"/>	ZT01053-Test	00:13:49:00:00:06	24%	1		WPA2PSK/TKIPAES	In
<input type="radio"/>	ZyXEL-yo-l2tp	00:24:A5:B3:75:9B	39%	3	AES	WPA2-PSK	In
<input type="radio"/>	MT01344-WiFi	00:23:F8:7A:9E:D4	65%	6	AES	WPA2-PSK	In
<input type="radio"/>	vi_wpa_psk	12:67:F0:37:A0:1F	34%	6	TKIP	WPA-PSK	In
<input type="radio"/>	SVD_Eric_trytry	00:00:AA:79:62:9D	29%	9	Not Use	NONE	In
<input type="radio"/>	ZyXEL_MIS_WPA	12:19:CB:88:82:08	96%	11		WPA2/AES	In
<input checked="" type="radio"/>	<input checked="" type="checkbox"/> ZyXEL_MIS	32:19:CB:88:82:08	86%	11	WEP	Unknown	In

The following table describes the labels in this screen.

Table 19 Universal Repeater Mode: Wireless LAN > Site Survey

LABEL	DESCRIPTION
Station Site Survey	
#	Select a wireless device and click Setting to go to the Universal Repeater screen with the selected wireless device's wireless settings configured. You then just need to enter the security key (if required) and click Apply in the Universal Repeater screen to connect to the selected wireless device.
SSID	This displays the SSID of the wireless device. <input checked="" type="checkbox"/> indicates the wireless device is added to an activated profile and the WAP3205 v2 is connecting to it.
BSSID	This displays the MAC address of the wireless device.
Signal Strength	This displays the strength of the wireless signal. The signal strength mainly depends on the antenna output power and the distance between your WAP3205 v2 and this device.
Channel	This displays the channel number used by this wireless device.
Encryption	This displays the data encryption method used by this wireless device.
Authentication	This displays the authentication method used by this wireless device.
Network Type	This displays the network type (In (Infrastructure) or Ad Hoc) of this wireless device.
Rescan	Click this button to search for available wireless devices within transmission range and update this table.
Setting	Select a wireless device and click this button to have the WAP3205 v2 automatically configure the selected wireless device's wireless settings in the Universal Repeater screen.

Introducing the Web Configurator

6.1 Overview

This chapter describes how to access the WAP3205 v2 Web Configurator and provides an overview of its screens.

The Web Configurator is an HTML-based management interface that allows easy setup and management of the WAP3205 v2 via Internet browser. Use Internet Explorer 6.0 and later or Safari 2.0 or later versions. The recommended screen resolution is 1024 by 768 pixels.

In order to use the Web Configurator you need to allow:

- Web browser pop-up windows from your device. Web pop-up blocking is enabled by default in Windows XP SP (Service Pack) 2.
- JavaScripts (enabled by default).
- Java permissions (enabled by default).

Refer to the Troubleshooting chapter ([Chapter 13 on page 106](#)) to see how to make sure these functions are allowed in Internet Explorer.

6.2 Accessing the Web Configurator

- 1 Connect your computer to the LAN port of the WAP3205 v2.
- 2 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.

6.2.1 Login Screen

The Web Configurator initially displays the following login screen.

Figure 25 Login screen



The following table describes the labels in this screen.

Table 20 Login screen

LABEL	DESCRIPTION
Password	Type "1234" (default) as the password.
Language	Select the language you want to use to configure the Web Configurator. Click Login .
	This shows the current weather, either in celsius or fahrenheit, of the city you specify in Section 6.2.3.1 on page 44 .
	This shows the time (hh:mm:ss) and date (yyyy:mm:dd) of the timezone you select in Section 6.2.3.2 on page 44 or Section 12.5 on page 101 . The time is in 24-hour format, for example 15:00 is 3:00 PM.

6.2.2 Password Screen

You should see a screen asking you to change your password (highly recommended) as shown next.

Figure 26 Change Password Screen



The following table describes the labels in this screen.

Table 21 Change Password Screen

LABEL	DESCRIPTION
New Password	Type a new password.
Retype to Confirm	Retype the password for confirmation.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Ignore	Click Ignore if you do not want to change the password this time.

Note: The management session automatically times out when the time period set in the **Administrator Inactivity Timer** field expires (default five minutes; go to [Chapter 12 on page 99](#) to change this). Simply log back into the WAP3205 v2 if this happens.

6.2.3 Home Screen

If you have previously logged into the Web Configurator but did not click **Logout**, you may be redirected to the **Home** screen.

You can also open this screen by clicking **Home** ( Home) in the Web Configurator screens.

The Home screen displays as follows.

Figure 27 Home Screen



The following table describes the labels in this screen.

Table 22 Home Screen

LABEL	DESCRIPTION
Go	Click this to open the Web Configurator Status screen.
Language	Select a language to go to the Web Configurator in that language and click Login .

Table 22 Home Screen

LABEL	DESCRIPTION
	(This is just an example). This shows the current weather, either in celsius or fahrenheit, of the city you specify in Section 6.2.3.1 on page 44 .
	(This is just an example). This shows the time (hh:mm:ss) and date (yyyy:mm:dd) of the timezone you select in Section 6.2.3.2 on page 44 or Section 12.5 on page 101 .

6.2.3.1 Weather Edit

You can change the temperature unit and select the location for which you want to know the weather.

Click the  icon to change the weather display.

Figure 28 Change Weather

The following table describes the labels in this screen.

Table 23 Change Weather

LABEL	DESCRIPTION
°C or °F	Choose which temperature unit you want the WAP3205 v2 to display.
Change Location	Select the location for which you want to know the weather. If the city you want is not listed, choose one that is closest to it.
Finish	Click this to apply the settings and refresh the date and time display.

6.2.3.2 Time/Date Edit

One timezone can cover more than one country. You can choose a particular country in which the WAP3205 v2 is located and have the WAP3205 v2 display and use the current time and date for its logs.

Click the  icon to change the time and date display.

Figure 29 Change Time Zone

The following table describes the labels in this screen.

Table 24 Change Time Zone

LABEL	DESCRIPTION
Change time zone	Select the specific country whose current time and date you want the WAP3205 v2 to display.
Finish	Click this to apply the settings and refresh the weather display.

Note: You can also edit the timezone in [Section 12.5 on page 101](#).

Connection Wizard

7.1 Overview

This chapter provides information on the wizard setup screens in the Web Configurator.

The Web Configurator's wizard setup helps you change the system login password and configure your device's operating mode and wireless settings.

7.2 Accessing the Wizard

Launch your web browser and type "http://zyxelsetup" as the website address. See [Section 6.2 on page 41](#) for detailed information.

Note: The wizard appears when the WAP3205 v2 is accessed for the first time or when you reset the WAP3205 v2 to its default factory settings.


The wizard screen opens.

Note: If you have already configured the wizard screens and want to open it again, click the **eaZy123** icon on the upper right corner of any Web Configurator screen.

7.2.1 Device Password

Change the login password in the following screen. Enter the new password and retype it to confirm. Click **Next** to proceed with the **Operation Mode** screen.

Figure 30 Device Password

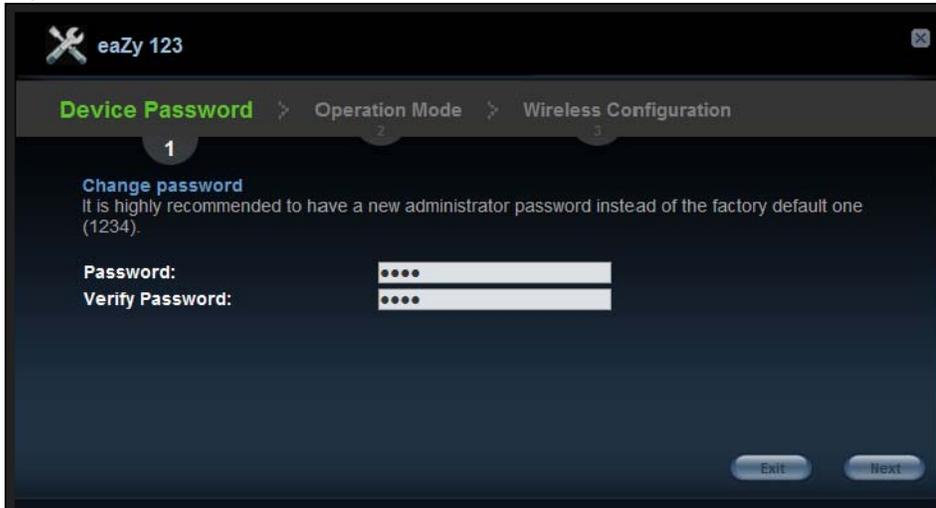

7.2.2 Operation Mode

The WAP3205 v2 can act as an access point (AP), wireless client or both at the same time. This shows in which device mode you want the WAP3205 v2 to operate. See [Section 2.1.1.1 on page 14](#) for how to change the WAP3205 v2's operating mode.

Click **Next** to configure wireless settings for the selected operating mode.

Figure 31 Operation Mode



7.2.3 Wireless Configuration

Configure the wireless network settings on your WAP3205 v2 in the following screen. The screen varies depending on the device operating mode.


7.2.3.1 Universal Repeater Mode

When the WAP3205 v2 is in universal repeater mode, the WAP3205 v2 works as an access point and wireless client at the same time. You can let wireless clients connect to another AP or wireless router through the WAP3205 v2 to expand wireless coverage.

Network Selection

Select the wireless device to which you want the WAP3205 v2 to connect and click **Connect**. Click **Refresh** to update the list of available wireless devices.

Figure 32 Wireless Configuration: Select a Network

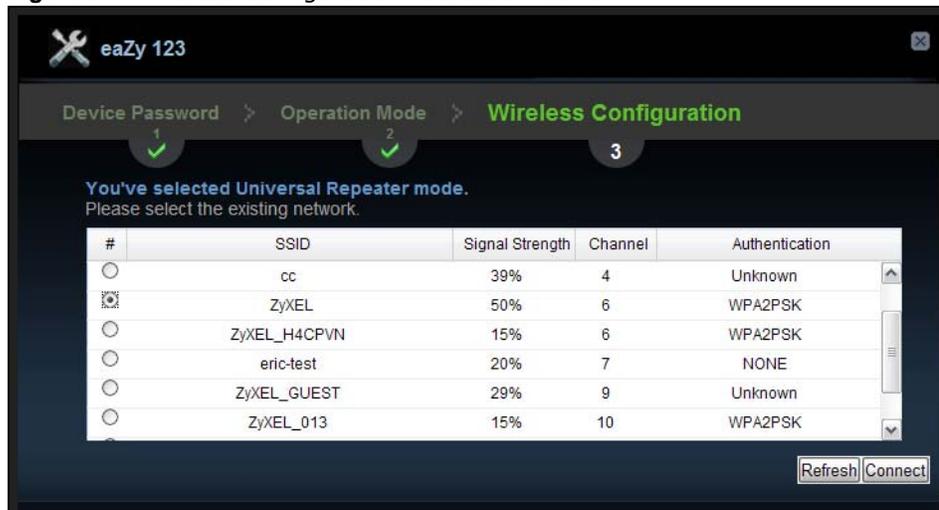

Wireless Security

Configure wireless and wireless security settings. The fields that show up depend on the security type used by the wireless device you selected. The SSID displays automatically. Enter the same security settings as the selected wireless device and click **Next**.

Figure 33 Wireless Security: No Security



Figure 34 Wireless Security: WPA(2)-PSK

The screenshot shows the 'Wireless Configuration' screen in the 'eaZy 123' interface. The breadcrumb trail is 'Device Password > Operation Mode > Wireless Configuration'. Steps 1 and 2 are marked with green checkmarks. The screen displays the following configuration options:

- Wireless Network Name (SSID): ZyXEL
- Security mode: WPA2-PSK
- Wireless password: [Redacted]
- Verify Password: [Redacted]

Buttons at the bottom include 'Exit', 'Back', and 'Next'.

Figure 35 Wireless Security: WEP

The screenshot shows the 'Wireless Configuration' screen in the 'eaZy 123' interface. The breadcrumb trail is 'Device Password > Operation Mode > Wireless Configuration'. Steps 1 and 2 are marked with green checkmarks. The screen displays the following configuration options:

- Wireless Network Name (SSID): ZyXEL
- Security mode: WEP
- WEP Encryption: 64-bits
- Encryption Type: Open
- Default Key: 1
- Key: [Redacted]

Buttons at the bottom include 'Exit', 'Back', and 'Next'.

Settings for Wireless Clients

Select the check box to use the same security settings (as the AP to which the WAP3205 v2 is connecting) for communication between the WAP3205 v2 and its wireless clients. Otherwise, clear the check box and use different SSID and wireless security settings for clients. Click **Next**.

Figure 36 Wireless Configuration: Select a Network



7.2.3.2 Access Point Mode

The WAP3205 v2 is in access point mode by default.

Configure wireless and wireless security settings. The fields that show up depend on the kind of security you select.

Wireless Security: No Security

Choose **No Security** in the **Security mode** field to let any wireless device within range access your wireless network.

Figure 37 Wireless Security: No Security



The following table describes the labels in this screen.


Table 25 Wireless Security: No Security

LABEL	DESCRIPTION
Wireless Network Name (SSID)	Enter a descriptive name (up to 32 printable 7-bit ASCII characters) for the wireless LAN. If you change this field on the WAP3205 v2, make sure all wireless clients use the same SSID in order to access the network.
Security mode	Select a security level from the drop-down list box. Choose None to have no wireless LAN security configured. If you do not enable any wireless security on your WAP3205 v2, your network is accessible to any wireless networking device that is within range.
Exit	Click this to close the wizard screen without saving.
Back	Click this to return to the previous screen.
Next	Click this to continue.

Wireless Security: WPA-PSK/WPA2-PSK

Choose **WPA-PSK** or **WPA2-PSK** security in the **Security mode** field to set up a password for your wireless network.

Figure 38 Wireless Security: WPA-PSK/WPA2-PSK

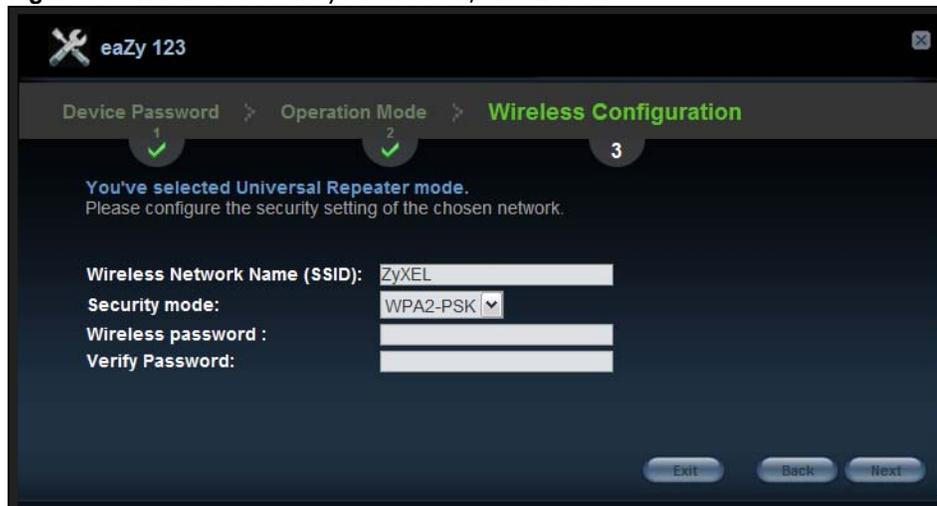

The following table describes the labels in this screen.

Table 26 Wireless Security: WPA-PSK/WPA2-PSK

LABEL	DESCRIPTION
Wireless Network Name (SSID)	Enter a descriptive name (up to 32 printable 7-bit ASCII characters) for the wireless LAN. If you change this field on the WAP3205 v2, make sure all wireless stations use the same SSID in order to access the network.
Security mode	Choose WPA-PSK or WPA2-PSK security to configure a Pre-Shared Key. Choose this option only if your wireless clients support WPA-PSK or WPA2-PSK respectively.
Wireless password	Type from 8 to 63 case-sensitive ASCII characters. You can set up the most secure wireless connection by configuring WPA in the wireless LAN screens.
Verify Password	Retype the password to confirm.
Exit	Click this to close the wizard screen without saving.


Table 26 Wireless Security: WPA-PSK/WPA2-PSK

LABEL	DESCRIPTION
Back	Click this to return to the previous screen.
Next	Click this to continue.

7.2.3.3 Client Mode

In this mode, the WAP3205 v2 is a wireless client. Clients can access the WAP3205 v2 through a wired connection only.

Select the wireless device to which you want the WAP3205 v2 to connect and click **Connect**. Click **Refresh** to update the list of available wireless devices.

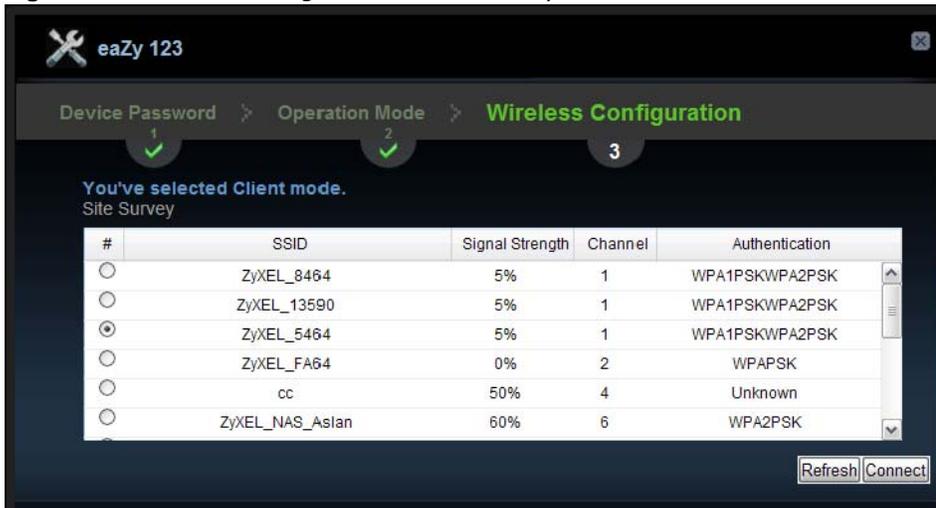Figure 39 Wireless Configuration: Site Survey

Wireless Security

Configure wireless and wireless security settings. The fields that show up depend on the security type used by the wireless device you selected. The SSID displays automatically. Enter the same security settings as the selected wireless device and click **Next**.

Figure 40 Wireless Security: No Security

The screenshot shows the 'Wireless Configuration' screen in the 'eaZy 123' application. The breadcrumb trail is 'Device Password > Operation Mode > Wireless Configuration'. Steps 1 and 2 are marked with green checkmarks. The text reads: 'You've selected Client mode. Please configure the security setting of the chosen network.' The 'Wireless Network Name (SSID)' is 'ZyXEL' and the 'Security mode' is 'No Security'. There are 'Exit', 'Back', and 'Next' buttons at the bottom.

Figure 41 Wireless Security: WPA(2)-PSK

The screenshot shows the 'Wireless Configuration' screen in the 'eaZy 123' application. The breadcrumb trail is 'Device Password > Operation Mode > Wireless Configuration'. Steps 1 and 2 are marked with green checkmarks. The text reads: 'You've selected Client mode. Please configure the security setting of the chosen network.' The 'Wireless Network Name (SSID)' is 'ZyXEL', the 'Security mode' is 'WPA2-PSK', and there are input fields for 'Wireless password' and 'Verify Password'. There are 'Exit', 'Back', and 'Next' buttons at the bottom.

Figure 42 Wireless Security: WEP

The screenshot shows the 'Wireless Configuration' screen in the 'eaZy 123' application. The breadcrumb trail is 'Device Password > Operation Mode > Wireless Configuration'. Steps 1 and 2 are marked with green checkmarks. The text reads: 'You've selected Client mode. Please configure the security setting of the chosen network.' The 'Wireless Network Name (SSID)' is 'ZyXEL01', the 'Security mode' is 'WEP', 'WEP Encryption' is '64-bits', 'Authentication Method' is 'Open', and 'Default Key' is '1'. There is an input field for 'Key'. There are 'Exit', 'Back', and 'Next' buttons at the bottom.

7.2.3.4 Wizard Setup Complete

Click **GO** to reboot the WAP3205 v2 and finish wizard configuration.

Figure 43 Wizard Setup Complete


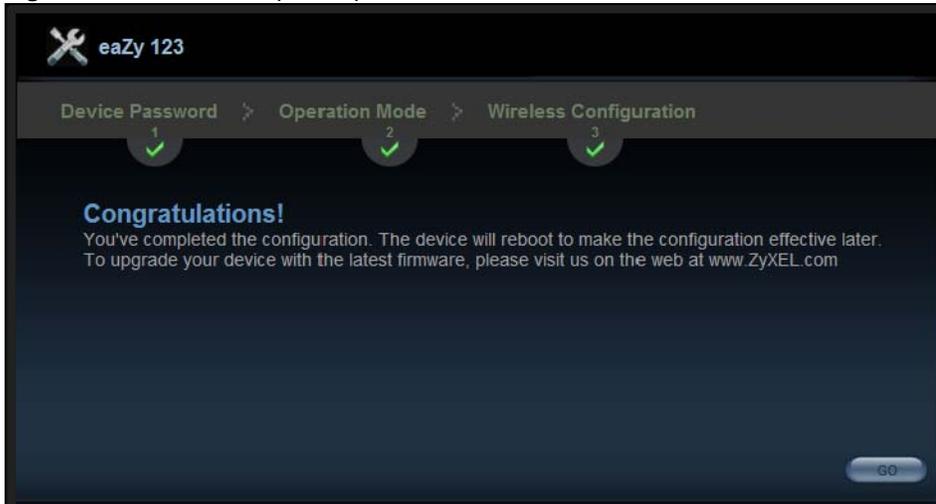


Figure 44 Device Rebooting

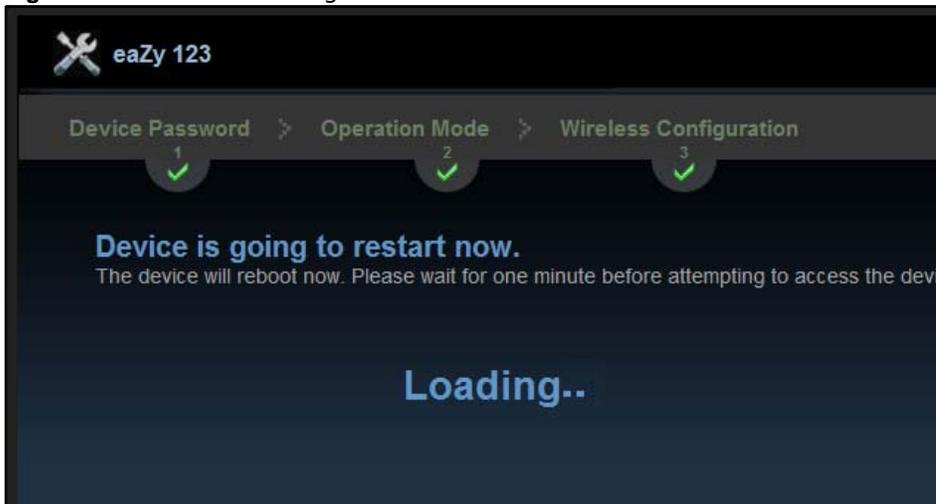

Congratulations! After the WAP3205 v2 restarts, the login screen displays. You have successfully set up your WAP3205 v2 to operate on your network and access the Internet. You are now ready to connect wirelessly to your WAP3205 v2 and access the Internet.

You can access the Web Configurator of your WAP3205 v2 for advanced settings, or open a web browser, such as Internet Explorer, to visit your favorite website.

8.1 Overview

This chapter provides tutorials for your WAP3205 v2 (in access point or universal repeater mode) as follows:

- [Connecting to the Internet from an Access Point](#)
- [Configuring Wireless Security Using WPS](#)
- [Enabling and Configuring Wireless Security \(No WPS\)](#)
- [Using Multiple SSIDs on the WAP3205 v2](#)
- [Connecting the WAP3205 v2 \(in Universal Repeater Mode\) to an AP or Wireless Router](#)


This chapter provides tutorials for your WAP3205 v2 (in client mode) as follows:

- [Connecting the WAP3205 v2 \(in Client Mode\) to an AP or Wireless Router](#)

8.2 Connecting to the Internet from an Access Point

This section gives you an example of how to set up an access point (AP) and wireless client (a notebook **B**), in this example) for wireless communication. **B** can access the Internet through the access point (**A**) wirelessly.

Figure 45 Wireless Access Point Connection to the Internet

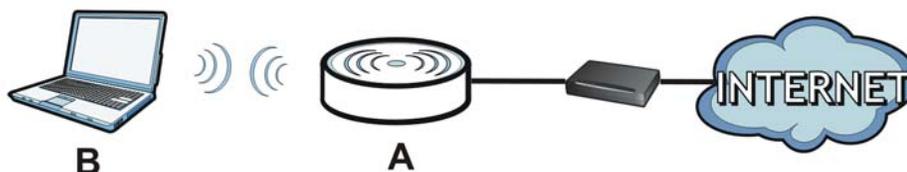

8.3 Configuring Wireless Security Using WPS

This section gives you an example of how to set up wireless network using WPS. This example uses the WAP3205 v2 as the AP and NWD-211AN as the wireless client which connects to a notebook.

Note: The wireless client must be a WPS-aware device (for example, a WPS USB adapter or PCI card).

There are two WPS methods for creating a secure connection. This tutorial shows you how to do both.

- **Push Button Configuration (PBC)** - create a secure wireless network simply by pressing a button. See [Section 8.3.1 on page 55](#). This is the easier method.
- **PIN Configuration** - create a secure wireless network simply by entering a wireless client's PIN (Personal Identification Number) in the WAP3205 v2's interface. See [Section 8.3.2 on page 56](#). This is the more secure method, since one device can authenticate the other.

8.3.1 Push Button Configuration (PBC)

- 1 Make sure that your WAP3205 v2 is turned on and set to work in AP mode and that it is within range of your computer.
- 2 Make sure that you have installed the wireless client (this example uses the NWD-211AN) driver and utility in your notebook.
- 3 In the wireless client utility, find the WPS settings. Enable WPS and press the WPS button (**Start** or **WPS** button)
- 4 Log into WAP3205 v2's Web Configurator. Make sure WPS is enabled in the **Network > Wireless LAN > WPS** screen and press the **Push Button** button in the **Network > Wireless LAN > WPS Station** screen.


Note: Your WAP3205 v2 has a WPS button located on its panel, as well as a WPS button in its configuration utility. Both buttons have exactly the same function; you can use one or the other.

Note: It doesn't matter which button is pressed first. You must press the second button within two minutes of pressing the first one.

The WAP3205 v2 sends the proper configuration settings to the wireless client. This may take up to two minutes. Then the wireless client is able to communicate with the WAP3205 v2 securely.

The following figure shows you how to set up wireless network and security by pressing a button on both WAP3205 v2 and wireless client (the NWD-211AN in this example).

Figure 46 Example WPS Process: PBC Method

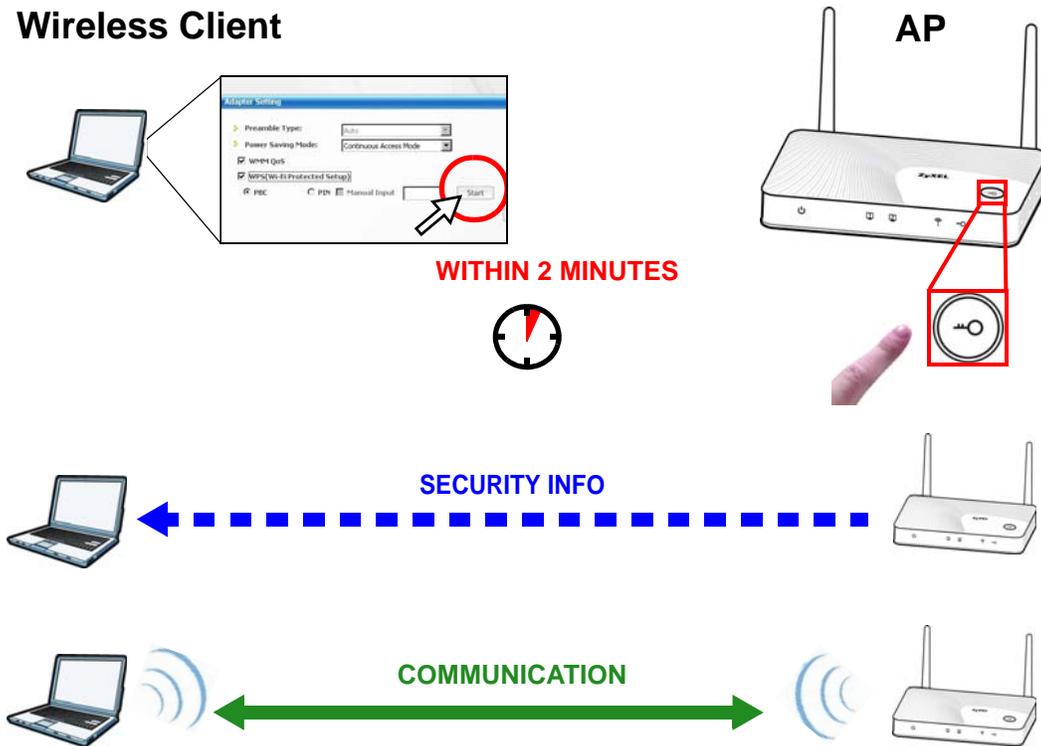

8.3.2 PIN Configuration


When you use the PIN configuration method, you need to use both WAP3205 v2's configuration interface and the client's utilities.

- 1 Launch your wireless client's configuration utility. Go to the WPS settings and select the PIN method to get a PIN number.
- 2 Enter the PIN number to the **PIN** field in the **Network > Wireless LAN > WPS Station** screen on the WAP3205 v2.
- 3 Click **Start** buttons (or button next to the PIN field) on both the wireless client utility screen and the WAP3205 v2's **WPS Station** screen within two minutes.

The WAP3205 v2 authenticates the wireless client and sends the proper configuration settings to the wireless client. This may take up to two minutes. Then the wireless client is able to communicate with the WAP3205 v2 securely.

The following figure shows you how to set up wireless network and security on WAP3205 v2 and wireless client (NWD-211AN in this example) by using PIN method.

Figure 47 Example WPS Process: PIN Method

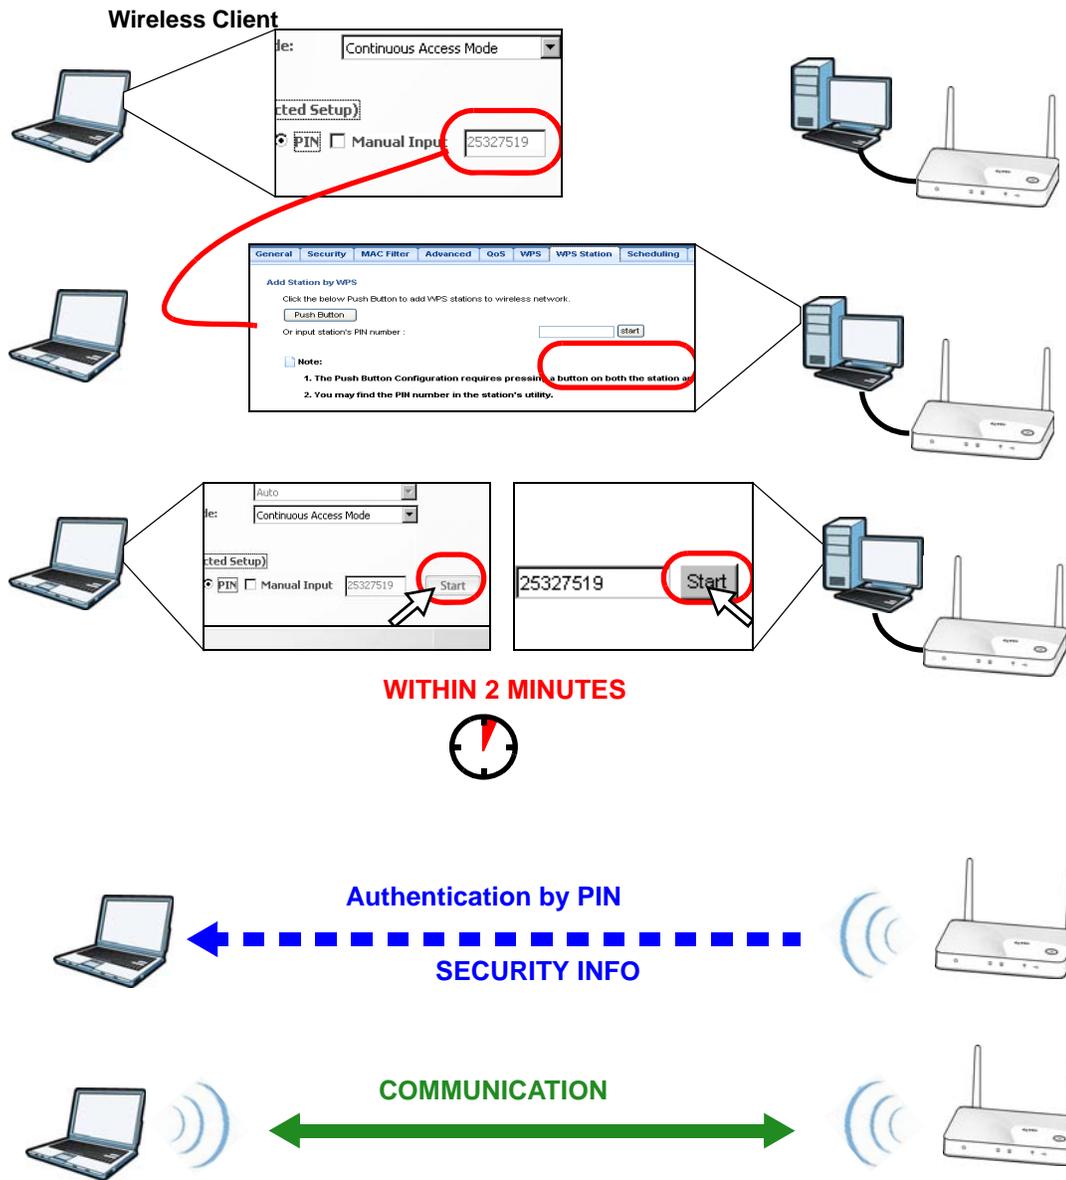

8.4 Enabling and Configuring Wireless Security (No WPS)

This example shows you how to configure wireless security settings with the following parameters on your WAP3205 v2.

Operating Mode	AP
SSID	SSID_Example3

Channel	Auto
Security	WPA-PSK (Pre-Shared Key: ThisismyWPA-PSKpre-sharedkey)

Follow the steps below to configure the wireless settings on your WAP3205 v2.

The instructions require that your hardware is connected (see the Quick Start Guide) and you are logged into the Web Configurator through your LAN connection (see [Section 6.2 on page 41](#)).

- 1 Set your WAP3205 v2 to work as an access point. See [Section 2.1.1.1 on page 14](#).
- 2 Open the **Wireless LAN > General** screen in the AP's Web Configurator.
- 3 Enter **SSID_Example3** as the SSID and select a channel or select **Auto Channel Selection** to have the WAP3205 v2 scans for and select an available channel automatically. Click **Apply**.

- 4 Click the **Security** tab.
- 5 Select the SSID (**SSID_Example3**) for which you want to configure the security. Set security mode to **WPA-PSK** and enter **ThisismyWPA-PSKpre-sharedkey** in the **Pre-Shared Key** field. Click **Apply**.

- 6 Open the **Status** screen. Verify your wireless and wireless security settings under **Device Information** and check if the WLAN connection is up under **Interface Status**.


The screenshot displays the ZyXEL WAP3205 v2 web interface. The top navigation bar includes 'Welcome: Admin | Logout | Home | About | eeZy123'. The main content area is titled 'Status' and features a 'Refresh Interval' dropdown set to 'None' and a 'Refresh Now' button. The interface is divided into several sections:

- Device Information:** A table listing various system parameters such as Host Name (WAP3205v2), Firmware Version (V1.00(AAEX.0)), and Sys OP Mode (Access Point Mode).
- LAN Information:** A table showing network details like MAC Address (CC:5D:4E:04:18:04), IP Address (192.168.1.2), and Subnet Mask (255.255.255.0).
- WLAN Information:** A table detailing wireless settings, including WLAN OP Mode (Access Point Mode), MAC Address (CC:5D:4E:04:18:04), Status (ON), SSID (SSID_Example3), Channel (Auto Channel), Operating Channel (Channel-11 2462MHz), Security Mode (WPA-PSK), 802.11 Mode (802.11b/g/n), and WPS (Configured). This section is highlighted with a red box.
- System Status:** A table showing system health metrics like System Up Time (5 hours, 39 mins, 36 secs), Current Date/Time (2012-05-30 / 06:46:26), CPU Usage (41%), and Memory Usage (36%).
- Interface Status:** A table listing network interfaces. The WLAN interface is shown as 'Up' with a rate of '300M', and this row is highlighted with a red box.


8.4.1 Configure Your Notebook

Note: We use the ZyXEL NWD-211AN wireless adapter utility screens as an example for the wireless client. The screens may vary for different models.


- 1 The WAP3205 v2 supports IEEE 802.11b, IEEE 802.11g and IEEE 802.11n wireless clients. Make sure that your notebook or computer's wireless adapter supports one of these standards.
- 2 Wireless adapters come with software sometimes called a "utility" that you install on your computer. See your wireless adapter's User's Guide for information on how to do that.
- 3 After you've installed the utility, open it. If you cannot see your utility's icon on your screen, go to **Start > Programs** and click on your utility in the list of programs that appears. The utility displays a list of APs within range, as shown in the example screen below.
- 4 Select SSID_Example3 and click **Connect**.

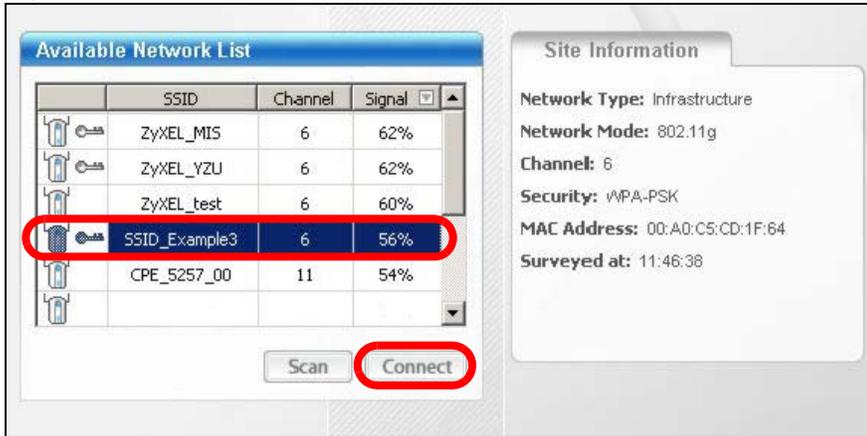Figure 48 Connecting a Wireless Client to a Wireless Network

- 5 Select WPA-PSK and type the security key in the following screen. Click **Next**.

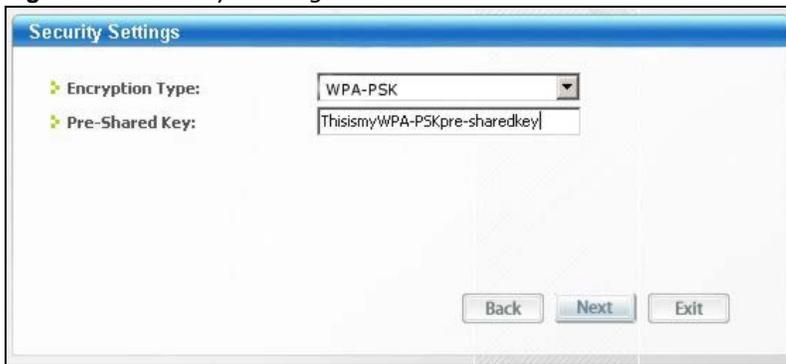Figure 49 Security Settings

- 6 The **Confirm Save** window appears. Check your settings and click **Save** to continue.

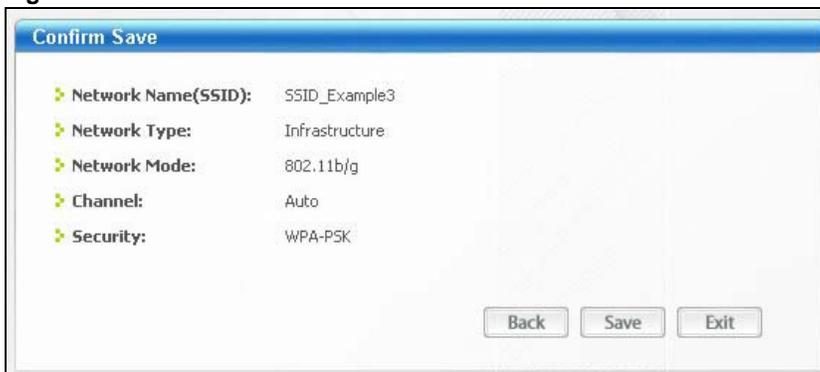Figure 50 Confirm Save

- 7 Check the status of your wireless connection in the screen below. If your wireless connection is weak or you have no connection, see the Troubleshooting section of this User's Guide.

Figure 51 Link Status


If your connection is successful, open your Internet browser and enter <http://www.zyxel.com> or the URL of any other web site in the address bar. If you are able to access the web site, your wireless connection is successfully configured.

8.5 Using Multiple SSIDs on the WAP3205 v2

You can configure more than one SSID on a WAP3205 v2 when it is operating in access point or universal repeater mode. This allows you to configure multiple independent wireless networks on the WAP3205 v2 as if there were multiple APs (virtual APs). Each virtual AP has its own SSID, wireless security type and MAC filtering settings. That is, each SSID on the WAP3205 v2 represents a different access point/wireless network to wireless clients in the network.

Clients can associate only with the SSIDs for which they have the correct security settings. Clients using different SSIDs can access the Internet and the wired network behind the WAP3205 v2 (such as a printer), but they cannot listen to each other's traffic.

For example, you may set up three wireless networks (A, B and C) in your office. A is for workers, B is for guests and C is specific to a VoIP device in the meeting room.

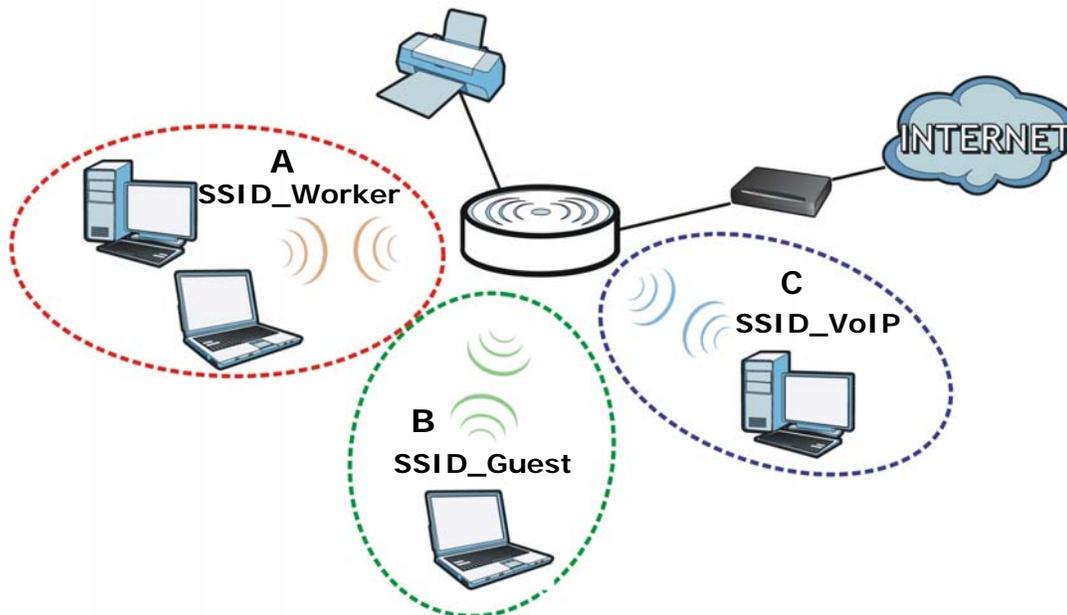

8.5.1 Configuring Security Settings of Multiple SSIDs

The WAP3205 v2 is in access point mode by default. If you want to use multiple SSIDs when the WAP3205 v2 is in universal repeater mode, see [Chapter 5 on page 31](#) for how to set the WAP3205 v2 to universal repeater mode.

This example shows you how to configure the SSIDs with the following parameters on your WAP3205 v2 (in access point mode).

SSID	SECURITY TYPE	KEY	MAC FILTERING
SSID_Worker	WPA2-PSK WPA Compatible	DoNotStealMyWirelessNetwork	Disable
SSID_Guest	Static WEP 128bit	keyexample123	Disable
SSID_VoIP	WPA-PSK	VoIPOnly12345678	Allow 00:A0:C5:01:23:45

- 1 Connect your computer to the LAN port of the WAP3205 v2 using an Ethernet cable.
- 2 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.
- 3 Enter "1234" (default) as the password and click **Login**.
- 4 Type a new password and retype it to confirm, then click **Apply**. Otherwise, click **Ignore**.
- 5 Go to **Configuration > Network > Wireless LAN > General**. Configure the screen as follows. In this example, you select **Enable Intra-BSS Traffic** for SSID_Worker and SSID_Guest to allow wireless clients in the same wireless network to communicate with each other. Click **Apply**.

The screenshot shows the 'Wireless Setup' configuration page. The 'General' tab is selected. The 'Wireless LAN' is set to 'ON'. There are three SSIDs configured: 'SSID_Worker', 'SSID_Guest', and 'SSID_VoIP'. Each SSID has a 'Hide' checkbox and an 'Enable Intra-BSS Traffic' checkbox. The 'SSID_Worker' and 'SSID_Guest' have their 'Enable Intra-BSS Traffic' checkboxes checked. The 'SSID_VoIP' has its 'Enable Intra-BSS Traffic' checkbox unchecked. There is also an 'Enable Guest WLAN' checkbox which is unchecked. The 'Channel Selection' is set to 'Channel-05 2432MHz' and 'Auto Channel Selection' is checked. The 'Operating Channel' is 'Channel-05 2432MHz'. At the bottom, there are 'Apply' and 'Cancel' buttons.

- 6 Click the **Security** tab to configure security settings for each SSID. Select **SSID_Worker** from the **SSID** drop-down list. Configure the screen as follows. Click **Apply**.

The screenshot shows the 'Security' configuration page for the selected SSID 'SSID_Worker'. The 'Security Mode' is set to 'WPA2-PSK'. The 'WPA Compatible' checkbox is checked. The 'Pre-Shared Key' is 'DoNotStealMyWirelessNetwork'. The 'Group Key Update Timer' is set to '3600' seconds. A note at the bottom states: 'Note: Only WPA-PSK and WPA2-PSK can be configured when WPS enabled'. At the bottom, there are 'Apply' and 'Reset' buttons.

- 7 Select **SSID_Guest** from the **SSID** drop-down list. Configure the screen as follows. Click **Apply**.

Security

SSID:

Security Mode:

PassPhrase:

WEP Encryption:

Authentication Method:

Note:
64-bit WEP: Enter 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
128-bit WEP: Enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
(Select one WEP key as an active key to encrypt wireless data transmission.)

ASCII HEX

Key 1:

Key 2:

Key 3:

Key 4:

Note: Only WPA-PSK and WPA2-PSK can be configured when WPS enabled

- 8 Select **SSID_VoIP** from the **SSID** drop-down list. Configure the screen as follows. Click **Apply**.

Security

SSID:


Security Mode:

Pre-Shared Key:

Group Key Update Timer: seconds

Note: Only WPA-PSK and WPA2-PSK can be configured when WPS enabled

- 9 Click the **MAC Filter** tab to configure MAC filtering for the **SSID_VoIP** wireless network. Select **SSID_VoIP** from the **SSID** drop-down list and select **Allow** in the **Policy** field. Enter the VoIP device's MAC address in the **Add a station Mac Address** field and click **Apply** to allow only the VoIP device to associate with the WAP3205 v2 using this SSID.

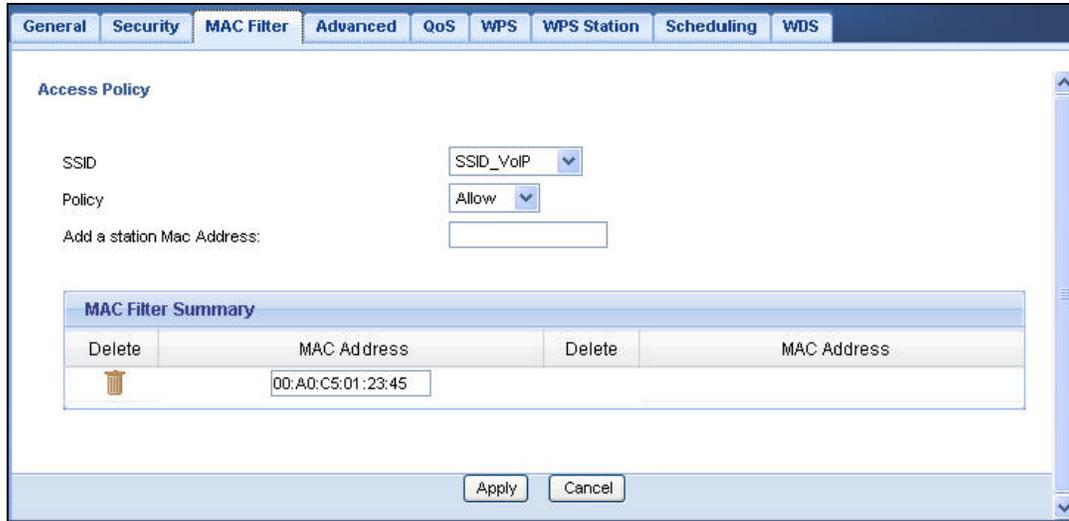

8.6 Connecting the WAP3205 v2 (in Universal Repeater Mode) to an AP or Wireless Router

If you have an access point or wireless router with Internet access deployed in your network already, and you want to have wireless clients connect to the existing AP or wireless router through the WAP3205 v2, set the WAP3205 v2 to universal repeater mode and then associate the WAP3205 v2 with the AP or wireless router. The WAP3205 v2 must be within the transmission range of the AP or wireless router.

- 1 Set your WAP3205 v2 to work as a universal repeater. See [Section 2.1.1.1 on page 14](#).
- 2 Connect your computer to the LAN port of the WAP3205 v2 using an Ethernet cable.
- 3 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.
- 4 Enter "1234" (default) as the password and click **Login**.
- 5 Type a new password and retype it to confirm, then click **Apply**. Otherwise, click **Ignore**.
- 6 Go to **Configuration > Network > Wireless LAN > Universal Repeater** to connect the WAP3205 v2 wirelessly to an AP. Select **Enable**. Enter the SSID of the existing AP or wireless router to which you want to connect ("SSIDofMyAP" in this example). Select the channel number and enter the wireless security settings which are the same as those on the existing AP or wireless router to access it (WPA-PSK and "KeyofMyWirelessNetwork" in this example). Click **Apply**.

Universal Repeater Parameters

Enable

SSID: SSIDofMyAP

MAC Address (Optional):

Channel Selection: Channel-05 2432MHz

Security Mode: WPA-PSK

Encryption Type: TKIP AES

Pre-Shared Key:

Apply Cancel

- 7 The channel number in the **Wireless LAN > General** screen will be automatically set to be the same as the one on the wireless router or AP to which the WAP3205 v2 is connecting. This allows wireless clients access or acquire an IP address from another AP or wireless router through the WAP3205 v2 in universal repeater mode.

Wireless Setup

Wireless LAN: ON

Network Name(SSID): SSID_Example3 Hide Enable Intra-BSS Traffic

Name(SSID1): Hide Enable Intra-BSS Traffic Enable Guest WLAN

Name(SSID2): Hide Enable Intra-BSS Traffic

Channel Selection: Channel-05 2432MHz Auto Channel Selection

Operating Channel: Channel-05 2432MHz

Apply Cancel

- 8 Go to the **Status** screen. If the WAP3205 v2 has successfully connected to an AP or wireless router, it displays the SSID and MAC address of the AP or wireless router in the field next to **WLAN Station Status** under **Device Information**.

Welcome: Admin | [Logout](#) | [Home](#) | [About](#) | eeZy123

ZyXEL WAP3205 v2

Status Refresh Interval: None

Device Information	
Item	Data
Host Name:	WAP3205v2
Firmware Version:	V1.00(AAEX.0)
Sys OP Mode:	Universal Repeater Mode
LAN Information:	
- MAC Address:	CC:5D:4E:04:18:04
- IP Address:	192.168.1.2
- IP Subnet Mask:	255.255.255.0
- DHCP:	None
WLAN Information:	
- WLAN OP Mode:	Universal Repeater Mode
- MAC Address:	CC:5D:4E:04:18:04
- Status:	ON
- Name(SSID):	SSID_Example3
- Channel:	Channel-06 2437MHz
- Operating Channel:	Channel-06 2437MHz
- Security Mode:	WPA-PSK
- 802.11 Mode:	802.11b/g/n
- WLAN Station Status:	SSIDofMyAP (52:4A:03:00:00:06)

System Status	
Item	Data
System Up Time:	9 mins, 46 secs
Current Date/Time:	2000-01-01 / 00:10:15
System Resource:	
- CPU Usage:	<div style="width: 45%;"></div> 45%
- Memory Usage:	<div style="width: 37%;"></div> 37%
System Setting:	
- Configuration Mode:	Expert

Interface Status		
Interface	Status	Rate
LAN	Up	100M
WLAN	Up	300M

Summary

[Packet Statistics \(Details...\)](#)

[WLAN Station Status \(Details...\)](#)

To check whether a wireless client is currently connecting to the WAP3205 v2, click the **WLAN Station Status (Details...)** hyperlink under **Summary** in the **Status** screen, or **Monitor > WLAN Station Status**. See [Section 9.5 on page 74](#) for more information.

Association List

Association List

#	MAC Address	Association Time
1	00:19:CB:32:BE:AC	01:09:05 2000/01/01


8.7 Connecting the WAP3205 v2 (in Client Mode) to an AP or Wireless Router

If you have an access point or wireless router with Internet access deployed in your network already, and you want to use the WAP3205 v2 as a wireless client to connect to the existing AP or wireless router, set the WAP3205 v2 to client mode. The WAP3205 v2 then acts as a wireless client. Your device, such as a computer, can connect to the WAP3205 v2 through a wired connection to access the Internet.

- 1 Set your WAP3205 v2 to work as a wireless client. See [Section 2.1.1.1 on page 14](#).
- 2 Connect your computer to the LAN port of the WAP3205 v2 using an Ethernet cable.
- 3 Open a web browser such as Internet Explorer and type "http://zyxelsetup" as the web address in your web browser.
- 4 Enter "1234" (default) as the password and click **Login**.
- 5 Type a new password and retype it to confirm, then click **Apply**. Otherwise, click **Ignore**.
- 6 To connect to a specific wireless network, you can manually create a wireless profile or use the site survey tool to associate with it.

8.7.1 Connecting to a Wireless Network Using Site Survey

- 1 Go to **Configuration > Network > Wireless LAN > Site Survey**. The WAP3205 v2 automatically scans for and connects to an available wireless network. The green check icon indicates the wireless device to which the WAP3205 v2 is connecting. Select an SSID's radio button and click **Add Profile** to add this wireless device to a profile.

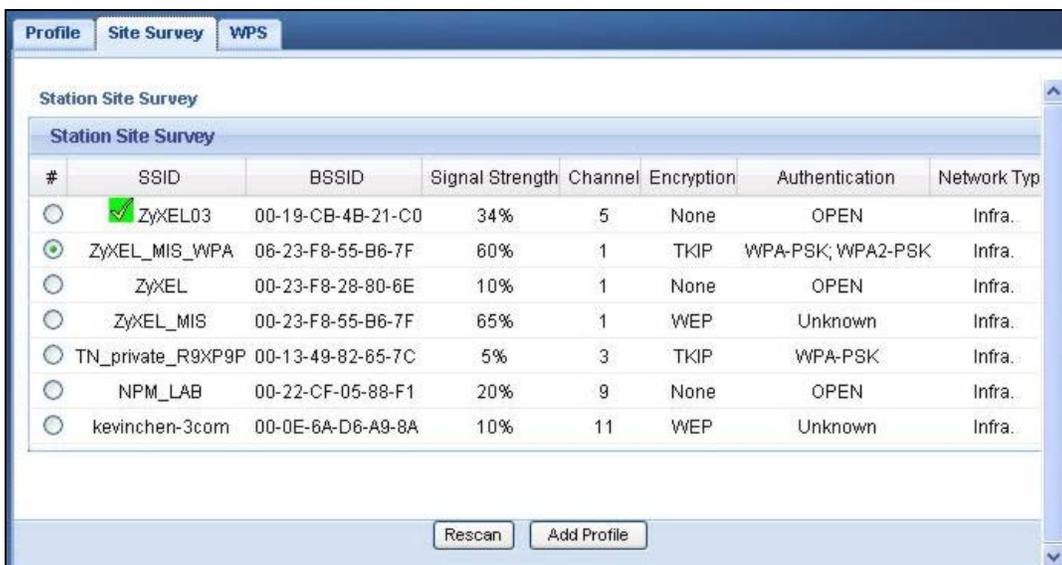

- 2 Enter a new profile name or use the name generated automatically by the system. Enter the security settings if requested and click **Apply**. The security settings must be the same as those on the AP to which you are connecting.

Profile | Site Survey | WPS

Wireless Setup

Profile Name: PROF001

Network Name(SSID): ZyXEL_MIS_WPA

Security

Security Mode: WPA2-PSK

Encryption Type: TKIP AES

Pre-Shared Key:

Apply | Back

- The new profile entry displays in the Profile screen. The green check icon means this profile is active and the WAP3205 v2 is associating with the specified wireless network.

Profile | Site Survey | WPS

Station Profile

Profile List

#	Profile	SSID	Channel	Authentication	Encryption	Network Type
<input checked="" type="checkbox"/>	PROF001	ZyXEL_MIS_WPA	Auto	WPA2-PSK	TKIP	Infrastructure

Add | Delete | Edit | Activate

8.7.2 Connecting to a Wireless Network Using a Profile

- Go to **Configuration > Network > Wireless LAN > Profile**. Click **Add** to manually create a wireless LAN profile.

Profile | Site Survey | WPS

Station Profile

Profile List

#	Profile	SSID	Channel	Authentication	Encryption	Network Type
---	---------	------	---------	----------------	------------	--------------

Add | Delete | Edit | Activate

- Enter a descriptive profile name and the SSID and security settings of the wireless device to which you want to connect. Click **Apply**.

- The new profile entry displays in the **Profile** screen. To enable a profile, select the corresponding radio button and click **Activate**. The green check icon means this profile is active and the WAP3205 v2 is associating with the specified wireless network.

#	Profile	SSID	Channel	Authentication	Encryption	Network Type
<input type="radio"/>	PROF001	ZyXEL_MIS_WPA	Auto	WPA2-PSK	TKIP	Infrastructure
<input checked="" type="radio"/>	MyAP	SSIDofMyAP	Auto	WPA-PSK	TKIP	Infrastructure

8.7.3 Deploying the WAP3205 v2 in your Network

- After you finish configuring the operating mode and wireless settings on the WAP3205 v2, disconnect the computer from the WAP3205 v2 and change its TCP/IP settings back to the previous ones.
- Connect a device to the WAP3205 v2, which you want to use to access the AP or wireless router through the WAP3205 v2. Make sure the device is set to obtain an IP address automatically.

PART II

Technical Reference

9.1 Overview

This chapter discusses read-only information related to the device state of the WAP3205 v2.

Note: To access the Monitor screens, you can also click the links in the Summary table of the Status screen to view the packets sent/received as well as the status of clients connected to the WAP3205 v2.

9.2 What You Can Do

- Use the **Log** screen ([Section 9.3 on page 72](#)) to view the logs for the categories such as system maintenance, system errors, and so on.
- use the **Packet Statistics** screen ([Section 9.4 on page 73](#)) to view port status, packet specific statistics, the "system up time" and so on.
- Use the **WLAN Station Status** screen ([Section 9.5 on page 74](#)) to view the wireless stations that are currently associated to the WAP3205 v2.

9.3 Log

Use the **View Log** screen to see the logged messages for the WAP3205 v2.

Log entries in red indicate system error logs. The log wraps around and deletes the old entries after it fills.

Click **Monitor > Log**.

Figure 52 Monitor > Log

Summary		
#	Time	Message
1	Jan 1 00:02:51	WAP3205 user.info syslog: Web management login password success for user 'admin' from 172.13.3.27.
2	Jan 1 00:00:12	WAP3205 daemon.info dnsmasq[1085]: started, version 2.40 cachesize 150
3	Jan 1 00:07:10	WAP3205 daemon.warn dnsmasq[1085]: overflow: 7 log entries lost
4	Jan 1 00:07:11	WAP3205 daemon.info dnsmasq[6563]: started, version 2.40 cachesize 150
5	Jan 1 00:07:11	WAP3205 daemon.info dnsmasq[6563]: compile time options: no-IPv6 GNU-getopt no-RTC no-MMU no-ISC-leasefile no-DBus no-I18N TFTP
6	Jan 1 00:07:11	WAP3205 daemon.warn dnsmasq[6563]: running as root
7	Jan 1 00:07:11	WAP3205 daemon.info dnsmasq[6563]: reading /etc/resolv.conf
8	Jan 1 00:07:11	WAP3205 daemon.info dnsmasq[6563]: read /etc/hosts - 2 addresses
9	Jan 1 00:07:11	WAP3205 daemon.info dnsmasq[6563]: exiting on receipt of SIGTERM
10	Jan 1 00:07:11	WAP3205 daemon.info dnsmasq[7313]: started, version 2.40 cachesize 150

The following table describes the labels in this screen.

Table 27 Monitor > Log

LABEL	DESCRIPTION
#	This field is a sequential value and is not associated with a specific entry.
Time	This field displays the time the log was recorded.
Message	This field states the reason for the log.
Refresh	Click Refresh to renew the log screen.
Clear	Click Clear to delete all the logs.

9.4 Packet Statistics

Click the **Packet Statistics (Details...)** hyperlink in the **Status** screen or **Monitor > Packet Statistics**. Read-only information here includes port status, packet specific statistics and the "system up time". The **Poll Interval(s)** field is configurable and is used for refreshing the screen.

Figure 53 Summary: Packet Statistics

Port	Status	TxPkts	RxPkts	Collisions	Tx B/s	Rx B/s	Up Time
LAN	100M	22338	32847	0	9493609	4383238	02:29:14
WLAN	300M	7040	623270	0	0	88856947	02:29:14

System Up Time : 2 hours, 29 mins, 20 secs

Poll Interval(s):

The following table describes the labels in this screen.

Table 28 Summary: Packet Statistics

LABEL	DESCRIPTION
Port	This is the WAP3205 v2's port type.
Status	For the LAN ports, this displays the port speed or Down when the line is disconnected. For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and Down when the WLAN is disabled.
TxPkts	This is the number of transmitted packets on this port.
RxPkts	This is the number of received packets on this port.
Collisions	This is the number of collisions on this port.
Tx B/s	This displays the transmission speed in bytes per second on this port.
Rx B/s	This displays the reception speed in bytes per second on this port.
Up Time	This is the total time the WAP3205 v2 has been for each session.
System Up Time	This is the total time the WAP3205 v2 has been on.
Poll Interval(s)	Enter the time interval in seconds for refreshing statistics in this field.
Set Interval	Click this button to apply the new poll interval you entered in the Poll Interval(s) field.
Stop	Click Stop to stop refreshing statistics.

9.5 WLAN Station Status

Click the **WLAN Station Status (Details...)** hyperlink in the **Status** screen or **Monitor > WLAN Station Status**. View the wireless stations that are currently associated to the WAP3205 v2 in the **Association List**. Association means that a wireless client (for example, your network or computer with a wireless network card) has connected successfully to the AP (or wireless router) using the same SSID, channel and security settings.

Note: This screen is not available when the WAP3205 v2 is in Client mode.

Figure 54 Summary: Wireless Association List

#	MAC Address	Association Time
1	00:19:CB:32:BE:AC	02:43:51 2000/01/01

The following table describes the labels in this screen.

Table 29 Summary: Wireless Association List

LABEL	DESCRIPTION
#	This is the index number of an associated wireless station.
MAC Address	This field displays the MAC address of an associated wireless station.
Association Time	This field displays the time a wireless station first associated with the WAP3205 v2's WLAN network.
Refresh	Click Refresh to reload the list.


Wireless LAN

10.1 Overview

This chapter discusses how to configure the wireless network settings in your WAP3205 v2. See the appendices for more detailed information about wireless networks.

The following figure provides an example of a wireless network.

Figure 55 Example of a Wireless Network

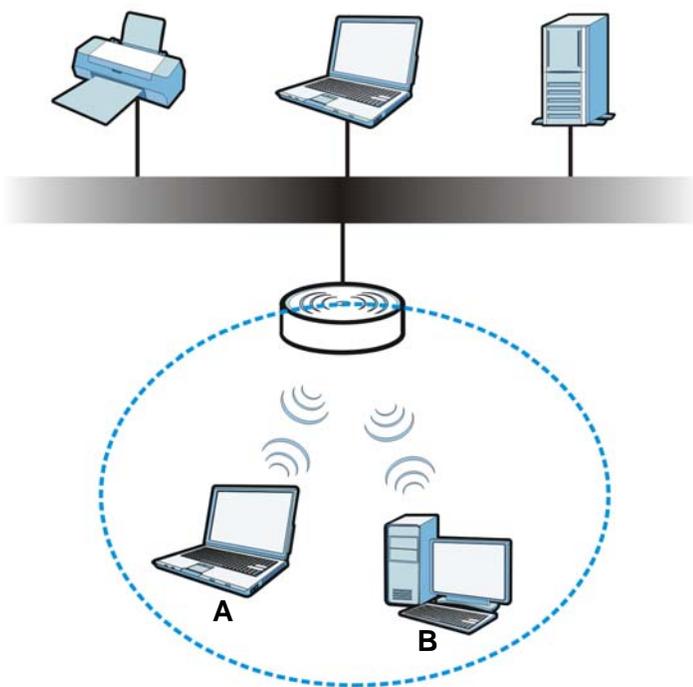

The wireless network is the part in the blue circle. In this wireless network, devices **A** and **B** are called wireless clients. The wireless clients use the access point (AP) to interact with other devices (such as the printer) or with the Internet. Your WAP3205 v2 is the AP.

10.2 What You Can Do

- Use the **General** screen ([Section 10.4 on page 80](#)) to enter the SSID, enable intra-BSS traffic and select the channel.
- Use the **Security** screen ([Section 10.5 on page 81](#)) to configure wireless security between the WAP3205 v2 and the wireless clients.

- Use the **MAC Filter** screen ([Section 10.6 on page 86](#)) to allow or deny wireless stations based on their MAC addresses from connecting to the WAP3205 v2.
- Use the **Advanced** screen ([Section 10.7 on page 87](#)) to configure wireless advanced features, such as set the RTS/CTS Threshold and HT physical mode.
- Use the **QoS** screen ([Section 10.8 on page 88](#)) to enable Wifi MultiMedia Quality of Service (WMMQoS). This allows the WAP3205 v2 to automatically set priority levels to services, such as e-mail, VoIP, chat, and so on.
- Use the **WPS** screen ([Section 10.9 on page 89](#)) to quickly set up a wireless network with strong security, without having to configure security settings manually.
- Use the **WPS Station** screen ([Section 10.10 on page 90](#)) to add a wireless station using WPS.
- Use the **Scheduling** screen ([Section 10.11 on page 90](#)) to set the times your wireless LAN is turned on and off.
- Use the **WDS** screen ([Section 10.12 on page 91](#)) to configure Wireless Distribution System on your WAP3205 v2.

10.3 What You Should Know

Every wireless network must follow these basic guidelines.

- Every wireless client in the same wireless network must use the same SSID.
The SSID is the name of the wireless network. It stands for Service Set IDentity.
- If two wireless networks overlap, they should use different channels.
Like radio stations or television channels, each wireless network uses a specific channel, or frequency, to send and receive information.
- Every wireless client in the same wireless network must use security compatible with the AP.
Security stops unauthorized devices from using the wireless network. It can also protect the information that is sent in the wireless network.

10.3.1 Wireless Security Overview

The following sections introduce different types of wireless security you can set up in the wireless network.

10.3.1.1 SSID

Normally, the AP acts like a beacon and regularly broadcasts the SSID in the area. You can hide the SSID instead, in which case the AP does not broadcast the SSID. In addition, you should change the default SSID to something that is difficult to guess.

This type of security is fairly weak, however, because there are ways for unauthorized devices to get the SSID. In addition, unauthorized devices can still see the information that is sent in the wireless network.

10.3.1.2 MAC Address Filter

Every wireless client has a unique identification number, called a MAC address.¹ A MAC address is usually written using twelve hexadecimal characters²; for example, 00A0C5000002 or

00:A0:C5:00:00:02. To get the MAC address for each wireless client, see the appropriate User's Guide or other documentation.

You can use the MAC address filter to tell the AP which wireless clients are allowed or not allowed to use the wireless network. If a wireless client is allowed to use the wireless network, it still has to have the correct settings (SSID, channel, and security). If a wireless client is not allowed to use the wireless network, it does not matter if it has the correct settings.

This type of security does not protect the information that is sent in the wireless network. Furthermore, there are ways for unauthorized devices to get the MAC address of an authorized wireless client. Then, they can use that MAC address to use the wireless network.

User Authentication

You can make every user log in to the wireless network before they can use it. This is called user authentication. However, every wireless client in the wireless network has to support IEEE 802.1x to do this.

For wireless networks, there are two typical places to store the user names and passwords for each user.

- In the AP: this feature is called a local user database or a local database.
- In a RADIUS server: this is a server used in businesses more than in homes.

If your AP does not provide a local user database and if you do not have a RADIUS server, you cannot set up user names and passwords for your users.

Unauthorized devices can still see the information that is sent in the wireless network, even if they cannot use the wireless network. Furthermore, there are ways for unauthorized wireless users to get a valid user name and password. Then, they can use that user name and password to use the wireless network.

Local user databases also have an additional limitation that is explained in the next section.

Encryption

Wireless networks can use encryption to protect the information that is sent in the wireless network. Encryption is like a secret code. If you do not know the secret code, you cannot understand the message.

-
1. Some wireless devices, such as scanners, can detect wireless networks but cannot use wireless networks. These kinds of wireless devices might not have MAC addresses.
 2. Hexadecimal characters are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, and F.

The types of encryption you can choose depend on the type of user authentication. (See [User Authentication on page 78](#) for information about this.)

Table 30 Types of Encryption for Each Type of Authentication

	NO AUTHENTICATION	RADIUS SERVER
Weakest  Strongest	No Security	WPA WPA2
	Static WEP	
	WPA-PSK	
	WPA2-PSK	

For example, if the wireless network has a RADIUS server, you can choose **WPA** or **WPA2**. If users do not log in to the wireless network, you can choose no encryption, **Static WEP**, **WPA-PSK**, or **WPA2-PSK**.

Usually, you should set up the strongest encryption that every wireless client in the wireless network supports. For example, suppose the AP does not have a local user database, and you do not have a RADIUS server. Therefore, there is no user authentication. Suppose the wireless network has two wireless clients. Device A only supports WEP, and device B supports WEP and WPA. Therefore, you should set up **Static WEP** in the wireless network.

Note: It is recommended that wireless networks use **WPA-PSK**, **WPA**, or stronger encryption. IEEE 802.1x and WEP encryption are better than none at all, but it is still possible for unauthorized devices to figure out the original information pretty quickly.

When you select **WPA2** or **WPA2-PSK** in your WAP3205 v2, you can also select an option (**WPA Compatible**) to support WPA as well. In this case, if some wireless clients support WPA and some support WPA2, you should set up **WPA2-PSK** or **WPA2** (depending on the type of wireless network login) and select the **WPA Compatible** option in the WAP3205 v2.

Many types of encryption use a key to protect the information in the wireless network. The longer the key, the stronger the encryption. Every wireless client in the wireless network must have the same key.

10.3.1.3 WPS

WiFi Protected Setup (WPS) is an industry standard specification, defined by the WiFi Alliance. WPS allows you to quickly set up a wireless network with strong security, without having to configure security settings manually. Depending on the devices in your network, you can either press a button (on the device itself, or in its configuration utility) or enter a PIN (Personal Identification Number) in the devices. Then, they connect and set up a secure network by themselves. See how to set up a secure wireless network using WPS in the [Section 8.3 on page 54](#).

10.3.1.4 WDS

Wireless Distribution System or WDS security is used between bridged APs. It is independent of the security between the wired networks and their respective APs. If you do not enable WDS security, traffic between APs is not encrypted. When WDS security is enabled, both APs must use the same pre-shared key.

10.4 General Wireless LAN Screen

Use this screen to enter the SSID, select the channel and enable intra-BSS traffic.

Note: If you are configuring the WAP3205 v2 from a computer connected to the wireless LAN and you change the WAP3205 v2's SSID, channel or security settings, you will lose your wireless connection when you press **Apply** to confirm. You must then change the wireless settings of your computer to match the WAP3205 v2's new settings.

Click **Network > Wireless LAN** to open the **General** screen.

Figure 56 Network > Wireless LAN > General

The screenshot shows the 'General' tab of the 'Wireless LAN' configuration screen. The 'Wireless Setup' section includes the following fields and options:

- Wireless LAN:** ON
- Network Name(SSID):** ZyXEL
- Name(SSID1):** test
- Name(SSID2):** test1
- Name(SSID3):** (empty)
- Channel Selection:** Channel-01 2412MHz
- Operating Channel:** Channel-11 2462MHz
- Enable Intra-BSS Traffic:** Checked for Network Name, SSID1, and SSID2.
- Enable Guest WLAN:** Checked.
- Auto Channel Selection:** Checked.

Buttons for 'Apply' and 'Cancel' are located at the bottom of the screen.

The following table describes the general wireless LAN labels in this screen.

Table 31 Network > Wireless LAN > General

LABEL	DESCRIPTION
Wireless Setup	
Wireless LAN	This is turned on by default. The current wireless state is reflected in this field.
Network Name(SSID) or Name(SSID1~3)	The SSID (Service Set Identity) identifies the Service Set with which a wireless client is associated. Enter a descriptive name (up to 32 printable characters found on a typical English language keyboard) for the wireless LAN. You can configure up to four SSIDs to enable multiple BSSs (Basic Service Sets) on the WAP3205 v2. This allows you to use one access point to provide several BSSs simultaneously. You can then assign varying security types to different SSIDs. Wireless clients can use different SSIDs to associate with the same access point.
Hide	Select this check box to hide the SSID in the outgoing beacon frame so a wireless client cannot obtain the SSID through scanning using a site survey tool.
Enable Intra-BSS Traffic	A Basic Service Set (BSS) exists when all communications between wireless clients or between a wireless client and a wired network client go through one access point (AP). Intra-BSS traffic is traffic between wireless clients in the BSS. When Intra-BSS is enabled, wireless clients can access the wired network and communicate with each other. When Intra-BSS is disabled, wireless clients can still access the wired network but cannot communicate with each other.

Table 31 Network > Wireless LAN > General

LABEL	DESCRIPTION
Enable Guest WLAN	Select this to forward any traffic from clients that connect to this SSID to the first LAN port on the WAP3205 v2. Clients that connect to this SSID will not be able to access the WAP3205 v2's second LAN port.
Channel Selection	Set the operating frequency/channel depending on your particular region. Select a channel from the drop-down list box. The options vary depending on the frequency band and the country you are in. This option is only available if Auto Channel Selection is disabled.
Auto Channel Selection	Select the check box to have the WAP3205 v2 automatically scan for and select a channel which is not used by another device.
Operating Channel	This displays the channel the WAP3205 v2 is currently using.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

10.5 Wireless Security Screen

Use this screen to select the wireless security mode for each SSID. Click **Network > Wireless LAN > Security** to open the **Security** screen. The screen varies depending on what you select in the **Security Mode** field.

10.5.1 No Security

Select **No Security** to allow wireless clients to communicate with the access points without any data encryption.

Note: If you do not enable any wireless security on your WAP3205 v2, your network is accessible to any wireless networking device that is within range.

Figure 57 Network > Wireless LAN > Security: No Security

The following table describes the labels in this screen.

Table 32 Network > Wireless LAN > Security: No Security

LABEL	DESCRIPTION
SSID	Select the SSID for which you want to configure the security.
Security Mode	Choose No Security from the drop-down list box.

Table 32 Network > Wireless LAN > Security: No Security

LABEL	DESCRIPTION
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to reload the previous configuration for this screen.

10.5.2 WEP Encryption

WEP encryption scrambles the data transmitted between the wireless stations and the access points to keep network communications private. It encrypts unicast and multicast communications in a network. Both the wireless stations and the access points must use the same WEP key.

Your WAP3205 v2 allows you to configure up to four 64-bit or 128-bit WEP keys but only one key can be enabled at any one time.

Select **Static WEP** from the **Security Mode** list.

Figure 58 Network > Wireless LAN > Security: Static WEP

The screenshot shows the 'Security' configuration page. At the top, there are tabs for 'General', 'Security', 'MAC Filter', 'Advanced', 'QoS', 'WPS', 'WPS Station', 'Scheduling', and 'WDS'. The 'Security' tab is selected. The configuration includes:

- SSID:** ZyXEL041804
- Security Mode:** Static WEP
- PassPhrase:** An empty text box with a 'Generate' button.
- WEP Encryption:** 64-bits
- Authentication Method:** Shared Key

Below the fields, there is a 'Note' section:

- 64-bit WEP:** Enter 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
- 128-bit WEP:** Enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
- (Select one WEP key as an active key to encrypt wireless data transmission.)**

There are radio buttons for 'ASCII' (selected) and 'HEX'. Below this are four key input fields labeled 'Key 1', 'Key 2', 'Key 3', and 'Key 4'. 'Key 1' is selected with a radio button. At the bottom, another note states: 'Note: Only WPA-PSK and WPA2-PSK can be configured when WPS is enabled'.

The following table describes the wireless LAN security labels in this screen.

Table 33 Network > Wireless LAN > Security: Static WEP

LABEL	DESCRIPTION
SSID	Select the SSID for which you want to configure the security.
Security Mode	Select Static WEP to enable data encryption.
PassPhrase	Enter a passphrase (up to 26 printable characters) and click Generate . A passphrase functions like a password. In WEP security mode, it is further converted by the WAP3205 v2 into a complicated string that is referred to as the "key". This key is requested from all devices wishing to connect to a wireless network.

Table 33 Network > Wireless LAN > Security: Static WEP

LABEL	DESCRIPTION
WEP Encryption	Select 64-bits or 128-bits . This dictates the length of the security key that the network is going to use.
Authentication Method	Select Auto or Shared Key from the drop-down list box. This field specifies whether the wireless clients have to provide the WEP key to login to the wireless client. Keep this setting at Auto unless you want to force a key verification before communication between the wireless client and the WAP3205 v2 occurs. Select Shared Key to force the clients to provide the WEP key prior to communication.
ASCII	Select this option in order to enter ASCII characters as WEP key.
Hex	Select this option in order to enter hexadecimal characters as a WEP key. The preceding "0x", that identifies a hexadecimal key, is entered automatically.
Key 1 to Key 4	The WEP keys are used to encrypt data. Both the WAP3205 v2 and the wireless stations must use the same WEP key for data transmission. If you chose 64-bit WEP , then enter any 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F"). If you chose 128-bit WEP , then enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F"). You must configure at least one key, only one key can be activated at any one time. The default key is key 1.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to reload the previous configuration for this screen.

10.5.3 WPA-PSK/WPA2-PSK

Select **WPA-PSK** or **WPA2-PSK** from the **Security Mode** list.

Figure 59 Network > Wireless LAN > Security: WPA-PSK/WPA2-PSK

The following table describes the labels in this screen.

Table 34 Network > Wireless LAN > Security: WPA-PSK/WPA2-PSK

LABEL	DESCRIPTION
SSID	Select the SSID for which you want to configure the security.
Security Mode	Select WPA-PSK or WPA2-PSK to enable data encryption.

Table 34 Network > Wireless LAN > Security: WPA-PSK/WPA2-PSK

LABEL	DESCRIPTION
WPA Compatible	This field appears when you choose WPA2-PSK as the Security Mode . Check this field to allow wireless devices using WPA-PSK security mode to connect to your WAP3205 v2.
Pre-Shared Key	WPA-PSK/WPA2-PSK uses a simple common password for authentication. Type a pre-shared key from 8 to 63 case-sensitive keyboard characters.
Group Key Update Timer	The Group Key Update Timer is the rate at which the AP sends a new group key out to all clients. The default is 3600 seconds (60 minutes).
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to reload the previous configuration for this screen.

10.5.4 WPA/WPA2 Authentication

Use this screen to configure and enable WPA or WPA2 authentication. Select **WPA** or **WPA2** from the **Security Mode** list.

Note: WPA or WPA2 is not available if you enable WPS before you configure WPA or WPA2 in the **Wireless LAN > Security** screen.

Note: If you select **WPA** or **WPA2** for the first SSID of the WAP3205 v2 in the **Wireless LAN > Security** screen, you cannot enable the WPS feature on the WAP3205 v2.

Figure 60 Network > Wireless LAN > Security: WPA/WPA2

The screenshot shows the 'Security' configuration page for the WAP3205 v2. The 'Security' tab is selected, and the 'WPA2' security mode is chosen. The SSID is 'ZyXEL041804'. The 'WPA Compatible' checkbox is unchecked. The 'Group Key Update Timer' is set to 3600 seconds. The 'PMK Cache Period' is set to 10 minutes. 'Pre-Authentication' is set to 'Disable'. The 'Authentication Server' section includes fields for IP Address (0), Port Number (1812), Shared Secret, and Session Timeout (0). A note at the bottom states: 'Note: Only WPA-PSK and WPA2-PSK can be configured when WPS enabled'. 'Apply' and 'Reset' buttons are at the bottom.

The following table describes the labels in this screen.

Table 35 Network > Wireless LAN > Security: WPA/WPA2

LABEL	DESCRIPTION
SSID	Select the SSID for which you want to configure the security.
Security Mode	Select WPA or WPA2 to enable authentication.
WPA Compatible	This field appears when you choose WPA2 as the Security Mode . Select this if you want the WAP3205 v2 to support WPA and WPA2 simultaneously. This allow wireless devices using WPA security mode to connect to your WAP3205 v2
Pre-Shared Key	WPA-PSK/WPA2-PSK uses a simple common password for authentication. Type a pre-shared key from 8 to 63 case-sensitive keyboard characters.
Group Key Update Timer	The Group Key Update Timer is the rate at which the RADIUS server sends a new group key out to all clients. The default is 3600 seconds (60 minutes).
PMK Cache Period	This field is available only when you select WPA2 . Specify how often wireless clients have to resend usernames and passwords in order to stay connected. Enter a time interval between 10 and 999999 minutes. Note: If wireless client authentication is done using a RADIUS server, the reauthentication timer on the RADIUS server has priority.
Pre-Authentication	This field is available only when you select WPA2 . Pre-authentication enables fast roaming by allowing the wireless client (already connecting to an AP) to perform IEEE 802.1x authentication with another AP before connecting to it. Select Enabled to turn on preauthentication in WAP2. Otherwise, select Disabled .
Authentication Server	
IP Address	Enter the IP address of the external authentication server in dotted decimal notation.
Port Number	Enter the port number of the external authentication server. The default port number is 1812. You need not change this value unless your network administrator instructs you to do so with additional information.
Shared Secret	Enter a password (up to 31 alphanumeric characters) as the key to be shared between the external authentication server and the WAP3205 v2. The key must be the same on the external authentication server and your WAP3205 v2. The key is not sent over the network.
Session Timeout	The WAP3205 v2 automatically disconnects a wireless client from the wireless and wired networks after a period of inactivity. The wireless client needs to send the username and password again before it can use the wireless and wired networks again. Some wireless clients may prompt users for a username and password; other clients may use saved login credentials. In either case, there is usually a short delay while the wireless client logs in to the wireless network again. Enter the time in seconds from 0 to 999999.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to reload the previous configuration for this screen.

10.6 MAC Filter

The MAC filter screen allows you to configure the WAP3205 v2 to give exclusive access to devices (Allow) or exclude devices from accessing the WAP3205 v2 (Deny). Every Ethernet device has a unique MAC (Media Access Control) address. The MAC address is assigned at the factory and consists of six pairs of hexadecimal characters, for example, 00:A0:C5:00:00:02. You need to know the MAC address of the devices to configure this screen.

To change your WAP3205 v2's MAC filter settings, click **Network > Wireless LAN > MAC Filter**. The screen appears as shown.

Figure 61 Network > Wireless LAN > MAC Filter

The following table describes the labels in this menu.

Table 36 Network > Wireless LAN > MAC Filter

LABEL	DESCRIPTION
Access Policy	
SSID	Select the SSID for which you want to configure MAC filtering.
Policy	Define the filter action for the list of MAC addresses in the MAC Address table. Select Disable to deactivate the MAC filtering rule you configure below. Select Allow to permit access to the WAP3205 v2, MAC addresses not listed will be denied access to the WAP3205 v2. Select Reject to block access to the WAP3205 v2, MAC addresses not listed will be allowed to access the WAP3205 v2
Add a station Mac Address	Enter the MAC addresses of the wireless station that are allowed or denied access to the WAP3205 v2 in these address fields. Enter the MAC addresses in a valid MAC address format, that is, six hexadecimal character pairs, for example, 12:34:56:78:9a:bc.
MAC Filter Summary	
Delete	Click the delete icon to remove the MAC address from the list.
MAC Address	This is the MAC address of the wireless station that are allowed or denied access to the WAP3205 v2.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

10.7 Wireless LAN Advanced Screen

Use this screen to allow wireless advanced features, such as the output power, RTS/CTS Threshold and high-throughput physical mode settings.

Click **Network > Wireless LAN > Advanced**. The screen appears as shown.

Figure 62 Network > Wireless LAN > Advanced

The following table describes the labels in this screen.

Table 37 Network > Wireless LAN > Advanced

LABEL	DESCRIPTION
RTS/CTS Threshold	Data with its frame size larger than this value will perform the RTS (Request To Send)/CTS (Clear To Send) handshake.
Fragmentation Threshold	The threshold (number of bytes) for the fragmentation boundary for directed messages. It is the maximum data fragment size that can be sent. Enter an even number between 256 and 2346 .
Output Power	Set the output power of the WAP3205 v2 in this field. If there is a high density of APs in an area, decrease the output power of the WAP3205 v2 to reduce interference with other APs. Select one of the following 100% , 90% , 75% , 50% , 25% or 10% . See the product specifications for more information on your WAP3205 v2's output power.
Network Mode	<p>Select 11b only to allow only IEEE 802.11b compliant WLAN devices to associate with the WAP3205 v2.</p> <p>Select 11g only to allow only IEEE 802.11g compliant WLAN devices to associate with the WAP3205 v2.</p> <p>Select 11n only to allow only IEEE 802.11n compliant WLAN devices to associate with the WAP3205 v2.</p> <p>Select 11 b/g mixed mode to allow both IEEE802.11b and IEEE802.11g compliant WLAN devices to associate with the WAP3205 v2. The transmission rate of your WAP3205 v2 might be reduced.</p> <p>Select 11 b/g/n mixed mode to allow both IEEE802.11b, IEEE802.11g and IEEE802.11n compliant WLAN devices to associate with the WAP3205 v2. The transmission rate of your WAP3205 v2 might be reduced.</p>


Table 37 Network > Wireless LAN > Advanced

LABEL	DESCRIPTION
HT (High Throughput) Physical Mode - Use the fields below to configure the 802.11 wireless environment of your WAP3205 v2.	
Operating Mode	Choose this according to the wireless mode(s) used in your network. Mixed - Select this if the wireless clients in your network use different wireless modes (for example, IEEE 802.11b/g and IEEE 802.1n modes) Green - Select this if the wireless clients in your network uses only one type of wireless mode (for example, IEEE 802.11 n only)
Channel Bandwidth	Select the channel bandwidth you want to use for your wireless network. It is recommended that you select 20/40 MHz . Select 20 MHz if you want to lessen radio interference with other wireless devices in your neighborhood.
Guard Interval	Select Auto to increase data throughput. However, this may make data transfer more prone to errors. Select Long to prioritize data integrity. This may be because your wireless network is busy and congested or the WAP3205 v2 is located in an environment prone to radio interference.
Extension Channel	This is set to Auto by default. If you select 20/40 MHz as your Channel Bandwidth , the extension channel enables the WAP3205 v2 to get higher data throughput. This also lowers radio interference and traffic.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

10.8 Quality of Service (QoS) Screen

The QoS screen allows you to automatically give a service (such as VoIP and video) a priority level.

Click **Network > Wireless LAN > QoS**. The following screen appears.

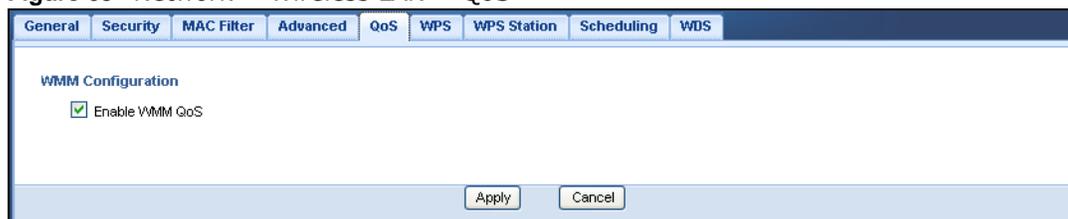Figure 63 Network > Wireless LAN > QoS

The following table describes the labels in this screen.

Table 38 Network > Wireless LAN > QoS

LABEL	DESCRIPTION
Enable WMM QoS	Check this to have the WAP3205 v2 automatically give a service a priority level according to the ToS value in the IP header of packets it sends. WMM QoS (Wifi MultiMedia Quality of Service) gives high priority to voice and video, which makes them run more smoothly.
Apply	Click Apply to save your changes to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

10.9 WPS Screen

Use this screen to enable/disable WPS, view or generate a new PIN number and check current WPS status. To open this screen, click **Network > Wireless LAN > WPS** tab.

Note: With WPS, wireless clients can only connect to the wireless network using the first SSID on the WAP3205 v2.

Figure 64 Network > Wireless LAN > WPS

The following table describes the labels in this screen.

Table 39 Network > Wireless LAN > WPS


LABEL	DESCRIPTION
WPS Setup	
Enable WPS	Select this to enable the WPS feature.
PIN Number	This displays a PIN number last time system generated. Click Generate to generate a new PIN number.
Status	
Status	This displays Configured when the WAP3205 v2 has connected to a wireless network using WPS or when Enable WPS is selected and wireless or wireless security settings have been changed. The current wireless and wireless security settings also appear in the screen. This displays Unconfigured if WPS is disabled and there are no wireless or wireless security changes on the WAP3205 v2 or you click Release_Configuration to remove the configured wireless and wireless security settings.
Release Configuration	This button is only available when the WPS status displays Configured . Click this button to remove all configured wireless and wireless security settings for WPS connections on the WAP3205 v2.
802.11 Mode	This is the 802.11 mode used. Only compliant WLAN devices can associate with the WAP3205 v2.
SSID	This is the name of the wireless network (the WAP3205 v2's first SSID).
Security	This is the type of wireless security employed by the network.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

10.10 WPS Station Screen

Use this screen when you want to add a wireless station using WPS. To open this screen, click **Network > Wireless LAN > WPS Station** tab.

Note: After you click **Push Button** on this screen, you have to press a similar button in the wireless station utility within 2 minutes. To add the second wireless station, you have to press these buttons on both device and the wireless station again after the first 2 minutes.

Figure 65 Network > Wireless LAN > WPS Station

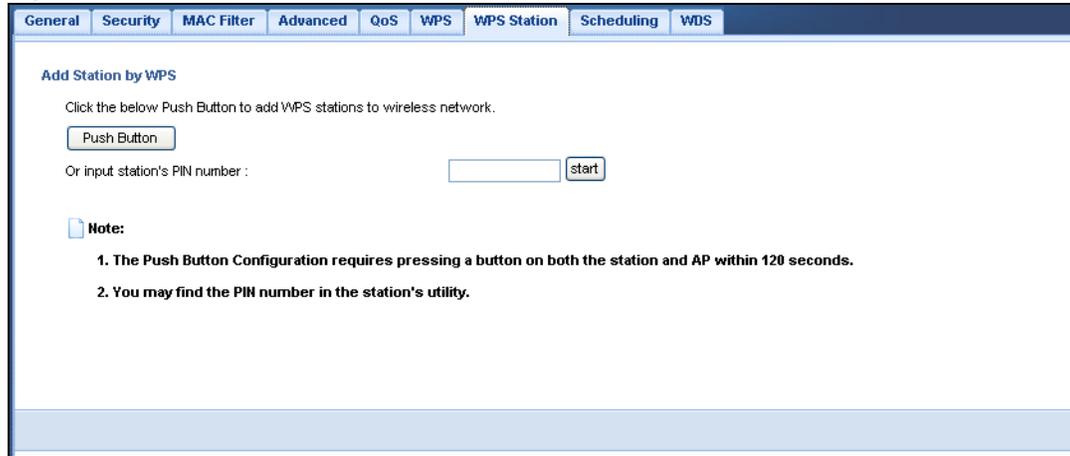

The following table describes the labels in this screen.

Table 40 Network > Wireless LAN > WPS Station

LABEL	DESCRIPTION
Push Button	Use this button when you use the PBC (Push Button Configuration) method to configure wireless stations's wireless settings. See Section 8.3.1 on page 55 . Click this to start WPS-aware wireless station scanning and the wireless security information synchronization.
Or input station's PIN number	Use this button when you use the PIN Configuration method to configure wireless station's wireless settings. See Section 8.3.2 on page 56 . Type the same PIN number generated in the wireless station's utility. Then click Start to associate to each other and perform the wireless security information synchronization.

10.11 Scheduling Screen

Use this screen to set the times your wireless LAN is turned on and off. Wireless LAN scheduling is disabled by default. The wireless LAN can be scheduled to turn on or off on certain days and at certain times. To open this screen, click **Network > Wireless LAN > Scheduling** tab.

Figure 66 Network > Wireless LAN > Scheduling

Wireless LAN Scheduling

Enable Wireless LAN Scheduling

WLAN status	Day	For the following times (24-Hour Format)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input checked="" type="checkbox"/> Everyday	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Mon	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Tue	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Wed	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Thu	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Fri	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Sat	00 (hour) 00 (min) ~ 00 (hour) 00 (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Sun	00 (hour) 00 (min) ~ 00 (hour) 00 (min)

Note: Setting the begin time to 00:00 and end time to 24:00 indicates a 24-hour schedule.

Apply Cancel

The following table describes the labels in this screen.

Table 41 Network > Wireless LAN > Scheduling

LABEL	DESCRIPTION
Wireless LAN Scheduling	
Enable Wireless LAN Scheduling	Select this to enable Wireless LAN scheduling.
Scheduling	
WLAN Status	Select On or Off to specify whether the Wireless LAN is turned on or off. This field works in conjunction with the Day and For the following times fields.
Day	Select Everyday or the specific days to turn the Wireless LAN on or off. If you select Everyday you can not select any specific days. This field works in conjunction with the For the following times field.
For the following times (24-Hour Format)	Select a begin time using the first set of hour and minute (min) drop down boxes and select an end time using the second set of hour and minute (min) drop down boxes. If you have chosen On earlier for the WLAN Status the Wireless LAN will turn on between the two times you enter in these fields. If you have chosen Off earlier for the WLAN Status the Wireless LAN will turn off between the two times you enter in these fields.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

10.12 WDS Screen

A Wireless Distribution System (WDS) is a wireless connection between two or more APs. Use this screen to set the operating mode of your WAP3205 v2 to **AP + Bridge** or **Bridge** and establish wireless links with other APs. You need to know the MAC address of the peer device, which also must be in bridge mode.

Note: You must enable the same wireless security settings on the WAP3205 v2 and on all wireless clients that you want to associate with it.

Click **Network > Wireless LAN > WDS** tab. The following screen opens with the **Basic Setting** set to **Disabled**, and **Security Mode** set to **No Security**.

Figure 67 Network > Wireless LAN > WDS

The following table describes the labels in this screen.

Table 42 Network > Wireless LAN > WDS

LABEL	DESCRIPTION
WDS Setup	
Basic Settings	<p>Select the operating mode for your WAP3205 v2.</p> <ul style="list-style-type: none"> Disable - The WAP3205 v2 works as an access point only and cannot establish wireless links with other APs. AP + Bridge (WDS Repeater) - The WAP3205 v2 functions as a bridge and access point simultaneously. Bridge - The WAP3205 v2 acts as a wireless network bridge and establishes wireless links with other APs. <p>You need to know the MAC address of the peer device, which also must be in bridge mode. The WAP3205 v2 can establish up to five wireless links with other APs.</p>
Local MAC Address	This is the MAC address of your WAP3205 v2.
Phy Mode	<p>Select the Phy mode you want the WAP3205 v2 to use. This dictates the maximum size of packets during data transmission.</p> <p>This field is not available when you select Disable in the Basic Setting field.</p>
Remote MAC Address	<p>This is the MAC address of the peer device that your WAP3205 v2 wants to make a bridge connection with.</p> <p>You can connect to up to 4 peer devices.</p>
Security	
EncrypType	<p>Select whether to use WEP, TKIP or AES encryption for your WDS connection in this field.</p> <p>Otherwise, select No Security.</p>
EncrypKey	The Encryp key is used to encrypt data. Peers must use the same key for data transmission.

Table 42 Network > Wireless LAN > WDS


LABEL	DESCRIPTION
Apply	Click Apply to save your changes to WAP3205 v2.
Cancel	Click Cancel to reload the previous configuration for this screen.

11.1 Overview

This chapter describes how to configure LAN settings.

A Local Area Network (LAN) is a shared communication system to which many computers are attached. A LAN is a computer network limited to the immediate area, usually the same building or floor of a building. The LAN screens can help you configure the manage IP address, and partition your physical network into logical networks.

Figure 68 LAN Example

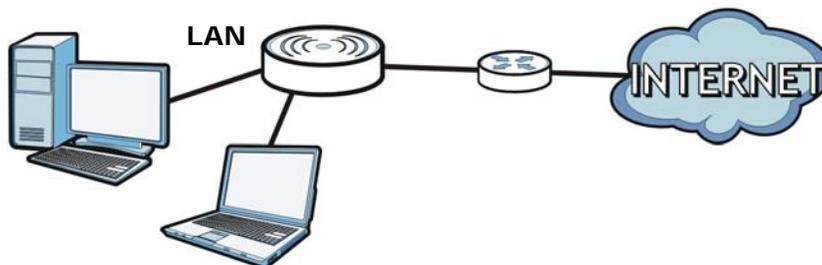


11.2 What You Can Do

- Use the **IP** screen ([Section 11.4 on page 95](#)) to change the IP address for your WAP3205 v2 and DNS server information.
- Use the **IP Alias** screen ([Section 11.5 on page 97](#)) to have the WAP3205 v2 apply IP alias to create LAN subnets.
- Use the **STP** screen ([Section 11.6 on page 98](#)) to enable or disable STP on the WAP3205 v2.

11.3 What You Need To Know

There are two separate IP networks, one inside the LAN network and the other outside the WAN network as shown next.

Figure 69 LAN and WAN IP Addresses

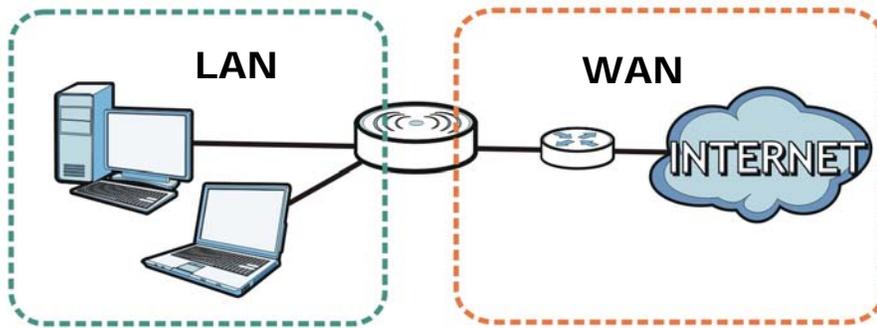

11.3.1 LAN TCP/IP

The WAP3205 v2 has built-in DHCP server capability that assigns IP addresses and DNS servers to systems that support DHCP client capability.

11.3.2 IP Alias

IP alias allows you to partition a physical network into different logical networks over the same Ethernet interface. The WAP3205 v2 supports three logical LAN interfaces via its single physical Ethernet interface with the WAP3205 v2 itself as the gateway for each LAN network.

11.4 LAN IP Screen

Use this screen to have the WAP3205 v2 work as a DHCP client or configure a static management IP address for your WAP3205 v2. Click **Network > LAN > IP**.

Figure 70 Network > LAN > IP (Access Point or Universal Repeater)

Figure 71 Network > LAN > IP (Client)

The following table describes the labels in this screen.

Table 43 Network > LAN > IP

LABEL	DESCRIPTION
Get from DHCP Server	<p>Click this to deploy the WAP3205 v2 as a DHCP client in the network.</p> <p>When you enable this, the WAP3205 v2 gets its IP address from the network's DHCP server (for example, your ISP or router). Users connected to the WAP3205 v2 can now access the network (i.e., the Internet if the IP address is given by the ISP or a router with Internet access).</p> <p>The Web Configurator may no longer be accessible unless you know the IP address assigned by the DHCP server to the WAP3205 v2. Otherwise, you need to reset the WAP3205 v2 to be able to access the Web Configurator again (see Section 12.7 on page 104 for details on how to reset the WAP3205 v2).</p> <p>Also when you select this, you cannot enter an IP address for your WAP3205 v2 in the field below.</p>
Use Defined LAN IP Address	Click this if you want to specify the IP address of your WAP3205 v2. Or if your ISP or network administrator gave you a static IP address to access the network or the Internet.
IP Address	Type the IP address in dotted decimal notation.
IP Subnet Mask	The subnet mask specifies the network number portion of an IP address.
Gateway IP Address	Enter a gateway IP address (if your ISP or network administrator gave you one) in this field.
DNS Assignment	

Table 43 Network > LAN > IP

LABEL	DESCRIPTION
First DNS Server Second DNS Server	Select From ISP if your ISP or router to which the WAP3205 v2 connects dynamically assigns DNS server information (and the WAP3205 v2's WAN IP address). The field to the right displays the (read-only) DNS server IP address that the ISP assigns. Select User-Defined if you have the IP address of a DNS server. Enter the DNS server's IP address in the field to the right. Select None if you do not want to configure DNS servers. If you do not configure a DNS server, you must know the IP address of a computer in order to access it.
MAC Clone Enable	This section is available only when the WAP3205 v2 is in client mode. Select this option to configure the LAN port's MAC address by either using the factory default or cloning the MAC address from a computer on your LAN.
AUTO	Select this to use the factory assigned default MAC Address.
Clone the computer's MAC address	Select this and enter the IP address of the computer on the LAN whose MAC you are cloning.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to begin configuring this screen afresh.

11.5 IP Alias Screen

Use this screen to have the WAP3205 v2 apply IP alias to create LAN subnets. Click **LAN > IP Alias**.

Figure 72 Network > LAN > IP Alias

The following table describes the labels in this screen.

Table 44 Network > LAN > IP Alias

LABEL	DESCRIPTION
IP Alias	Check this to enable IP alias.
IP Address	Type the IP alias address of your WAP3205 v2 in dotted decimal notation.
IP Subnet Mask	The subnet mask specifies the network number portion of an IP address.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to begin configuring this screen afresh.

11.6 STP Screen

Use this screen to turn on or turn off STP (Spanning Tree Protocol). Click **LAN > STP**.

Figure 73 Network > LAN > STP



The following table describes the labels in this screen.

Table 45 Network > LAN > STP

LABEL	DESCRIPTION
Enable STP	STP detects and breaks network loops and provides backup links between switches, bridges or routers. It allows a bridge to interact with other STP-compliant bridges in your network to ensure that only one path exists between any two stations on the network. Select the check box to activate STP on the WAP3205 v2.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to begin configuring this screen afresh.

Maintenance

12.1 Overview

This chapter provides information on the **Maintenance** screens.


12.2 What You Can Do

- Use the **General** screen ([Section 12.3 on page 99](#)) to set the timeout period of the management session.
- Use the **Password** screen ([Section 12.4 on page 100](#)) to change your WAP3205 v2's system password.
- Use the **Time** screen ([Section 12.5 on page 101](#)) to change your WAP3205 v2's time and date.
- Use the **Firmware Upgrade** screen ([Section 12.6 on page 102](#)) to upload firmware to your WAP3205 v2.
- Use the **Backup/Restore** screen ([Section 12.8 on page 105](#)) to view information related to factory defaults, backup configuration, and restoring configuration.
- Use the **Restart** screen ([Section 12.8 on page 105](#)) to reboot the WAP3205 v2 without turning the power off.

12.3 General Screen

Use this screen to set the management session timeout period. Click **Maintenance > General**. The following screen displays.

Figure 74 Maintenance > General

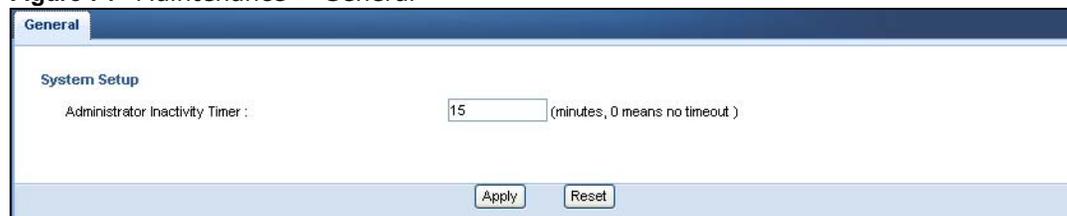

General

System Setup

Administrator Inactivity Timer : (minutes, 0 means no timeout)

Apply Reset

The following table describes the labels in this screen.

Table 46 Maintenance > General

LABEL	DESCRIPTION
Administrator Inactivity Timer	Type how many minutes a management session can be left idle before the session times out. The default is 5 minutes. After it times out you have to log in with your password again. Very long idle timeouts may have security risks. A value of "0" means a management session never times out, no matter how long it has been left idle (not recommended).
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to begin configuring this screen afresh.

12.4 Password Screen

It is strongly recommended that you change your WAP3205 v2's password.

If you forget your WAP3205 v2's password (or IP address), you will need to reset the device. See [Section 12.8 on page 105](#) for details

Click **Maintenance > Password**.

Figure 75 Maintenance > Password

The following table describes the labels in this screen.

Table 47 Maintenance > Password

LABEL	DESCRIPTION
Password Setup	Change your WAP3205 v2's password (recommended) using the fields as shown.
Old Password	Type the default password or the existing password you use to access the system in this field.
New Password	Type your new system password (up to 30 characters). Note that as you type a password, the screen displays an asterisk (*) for each character you type.
Retype to Confirm	Type the new password again in this field.
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to begin configuring this screen afresh.

12.5 Time Setting Screen

Use this screen to configure the WAP3205 v2's time based on your local time zone. To change your WAP3205 v2's time and date, click **Maintenance > Time**. The screen appears as shown.

Figure 76 Maintenance > Time

The following table describes the labels in this screen.

Table 48 Maintenance > Time

LABEL	DESCRIPTION
Current Time and Date	
Current Time	This field displays the time of your WAP3205 v2. Each time you reload this page, the WAP3205 v2 synchronizes the time with the time server.
Current Date	This field displays the date of your WAP3205 v2. Each time you reload this page, the WAP3205 v2 synchronizes the date with the time server.
Current Time and Date	
Manual	Select this radio button to enter the time and date manually. If you configure a new time and date, Time Zone and Daylight Saving at the same time, the new time and date you entered has priority and the Time Zone and Daylight Saving settings do not affect it.
New Time (hh:mm:ss)	This field displays the last updated time from the time server or the last time configured manually. When you select Manual , enter the new time in this field and then click Apply .
New Date (yyyy/mm/dd)	This field displays the last updated date from the time server or the last date configured manually. When you select Manual , enter the new date in this field and then click Apply .


Table 48 Maintenance > Time

LABEL	DESCRIPTION
Get from Time Server	Select this radio button to have the WAP3205 v2 get the time and date from the time server you specified below.
Auto	Select Auto to have the WAP3205 v2 automatically search for an available time server and synchronize the date and time with the time server after you click Apply .
User Defined Time Server Address	Select User Defined Time Server Address and enter the IP address or URL (up to 20 extended ASCII characters in length) of your time server. Check with your ISP/network administrator if you are unsure of this information.
Time Zone Setup	
Time Zone	Choose the time zone of your location. This will set the time difference between your time zone and Greenwich Mean Time (GMT).
Daylight Savings	Daylight saving is a period from late spring to fall when many countries set their clocks ahead of normal local time by one hour to give more daytime light in the evening. Select this option if you use Daylight Saving Time.
Start Date	Configure the day and time when Daylight Saving Time starts if you selected Daylight Savings . The o'clock field uses the 24 hour format. Here are a couple of examples: Daylight Saving Time starts in most parts of the United States on the second Sunday of March. Each time zone in the United States starts using Daylight Saving Time at 2 A.M. local time. So in the United States you would select Second, Sunday, March and type 2 in the o'clock field. Daylight Saving Time starts in the European Union on the last Sunday of March. All of the time zones in the European Union start using Daylight Saving Time at the same moment (1 A.M. GMT or UTC). So in the European Union you would select Last, Sunday, March . The time you type in the o'clock field depends on your time zone. In Germany for instance, you would type 2 because Germany's time zone is one hour ahead of GMT or UTC (GMT+1).
End Date	Configure the day and time when Daylight Saving Time ends if you selected Daylight Savings . The o'clock field uses the 24 hour format. Here are a couple of examples: Daylight Saving Time ends in the United States on the first Sunday of November. Each time zone in the United States stops using Daylight Saving Time at 2 A.M. local time. So in the United States you would select First, Sunday, November and type 2 in the o'clock field. Daylight Saving Time ends in the European Union on the last Sunday of October. All of the time zones in the European Union stop using Daylight Saving Time at the same moment (1 A.M. GMT or UTC). So in the European Union you would select Last, Sunday, October . The time you type in the o'clock field depends on your time zone. In Germany for instance, you would type 2 because Germany's time zone is one hour ahead of GMT or UTC (GMT+1).
Apply	Click Apply to save your changes back to the WAP3205 v2.
Reset	Click Reset to begin configuring this screen afresh.

12.6 Firmware Upgrade Screen

Find firmware at www.zyxel.com in a file that (usually) uses the system model name with a "*.bin" extension, e.g., "WAP3205 v2.bin". The upload process uses HTTP (Hypertext Transfer Protocol) and may take up to two minutes. After a successful upload, the system will reboot.

Click **Maintenance > Firmware Upgrade**. Follow the instructions in this screen to upload firmware to your WAP3205 v2.

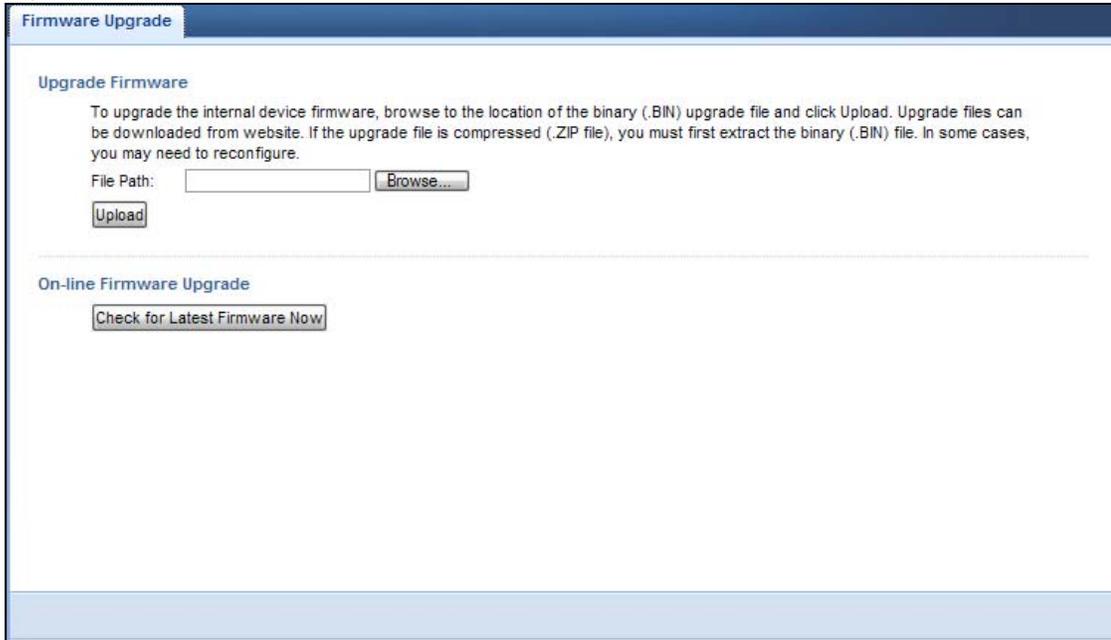Figure 77 Maintenance > Firmware Upgrade

The following table describes the labels in this screen.

Table 49 Maintenance > Firmware Upgrade

LABEL	DESCRIPTION
Upgrade Firmware	
File Path	Type in the location of the file you want to upload in this field or click Browse... to find it.
Browse...	Click Browse... to find the .bin file you want to upload. Remember that you must decompress compressed (.zip) files before you can upload them.
Upload	Click Upload to begin the upload process. This process may take up to two minutes.
On-line Firmware Upgrade	
Check for Latest Firmware Now	Click this button to get the latest firmware information, such as the version number, release date, release note and file size from the ZyXEL website. Make sure your WAP3205 v2 has Internet access.
Do-Firmware_Upgade	Click this button to download and install the latest firmware in your WAP3205 v2.

Note: Do not turn off the WAP3205 v2 while firmware upload is in progress!

After you see the **Firmware Upload In Process** screen, wait two minutes before logging into the WAP3205 v2 again.

The WAP3205 v2 automatically restarts in this time causing a temporary network disconnect. In some operating systems, you may see the following icon on your desktop.

Figure 78 Network Temporarily Disconnected

After two minutes, log in again and check your new firmware version in the **Status** screen.

If the upload was not successful, an error message appears. Click **Return** to go back to the **Firmware Upgrade** screen.

12.7 Configuration Backup/Restore Screen

Backup configuration allows you to back up (save) the WAP3205 v2's current configuration to a file on your computer. Once your WAP3205 v2 is configured and functioning properly, it is highly recommended that you back up your configuration file before making configuration changes. The backup configuration file will be useful in case you need to return to your previous settings.

Restore configuration allows you to upload a new or previously saved configuration file from your computer to your WAP3205 v2.

Click **Maintenance > Backup/Restore**. Information related to factory defaults, backup configuration, and restoring configuration appears as shown next.

Figure 79 Maintenance > Backup/Restore

The screenshot shows a web interface for 'Backup / Restore'. It has a blue header with the title. Below the header, there are three main sections separated by horizontal lines. The first section, 'Backup Configuration', contains the text 'Click Backup to save the current configuration of your system to your computer.' followed by a 'Backup' button. The second section, 'Restore Configuration', contains the text 'To restore a previously saved configuration file to your system, browse to the location of the configuration file and click Upload.' Below this is a 'File Path:' label, an empty text input field, a 'Browse...' button, and an 'Upload' button. The third section, 'Back to Factory Defaults', contains the text 'Click Reset to clear all user-entered configuration information and return to factory defaults. After resetting, the' followed by two bullet points: '- Password will be 1234' and '- LAN IP address will be 192.168.1.2'. A 'Reset' button is located at the bottom right of this section.

The following table describes the labels in this screen.

Table 50 Maintenance > Backup/Restore

LABEL	DESCRIPTION
Backup	Click Backup to save the WAP3205 v2's current configuration to your computer.
File Path	Type in the location of the file you want to upload in this field or click Browse... to find it.
Browse...	Click Browse... to find the file you want to upload. Remember that you must decompress compressed (.ZIP) files before you can upload them.


Table 50 Maintenance > Backup/Restore

LABEL	DESCRIPTION
Upload	<p>Click Upload to begin the upload process.</p> <p>Note: Do not turn off the WAP3205 v2 while configuration file upload is in progress.</p> <p>After you see a "configuration upload successful" screen, you must then wait one minute before logging into the WAP3205 v2 again. The WAP3205 v2 automatically restarts in this time causing a temporary network disconnect.</p> <p>If you see an error screen, click Back to return to the Backup/Restore screen.</p>
Reset	<p>Pressing the Reset button in this section clears all user-entered configuration information and returns the WAP3205 v2 to its factory defaults.</p> <p>You can also press the RESET button on the rear panel to reset the factory defaults of your WAP3205 v2. Refer to the chapter about introducing the Web Configurator for more information on the RESET button.</p>

12.8 Restart Screen

System restart allows you to reboot the WAP3205 v2 without turning the power off.

Click **Maintenance > Restart** to open the following screen.

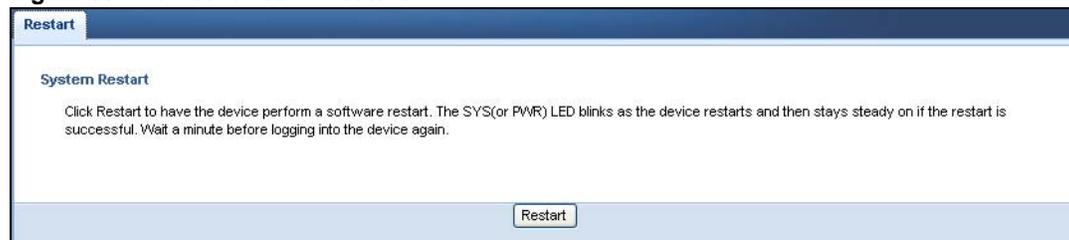Figure 80 Maintenance > Restart

Click **Restart** to have the WAP3205 v2 reboot. This does not affect the WAP3205 v2's configuration.

Troubleshooting

This chapter offers some suggestions to solve problems you might encounter. The potential problems are divided into the following categories.

- [Power, Hardware Connections, and LEDs](#)
- [WAP3205 v2 Access and Login](#)
- [Internet Access](#)
- [Resetting the WAP3205 v2 to Its Factory Defaults](#)
- [Wireless Router/AP Troubleshooting](#)

13.1 Power, Hardware Connections, and LEDs

The WAP3205 v2 does not turn on. None of the LEDs turn on.

- 1 Make sure you are using the power adaptor or cord included with the WAP3205 v2.
- 2 Make sure the power adaptor or cord is connected to the WAP3205 v2 and plugged in to an appropriate power source. Make sure the power source is turned on.
- 3 Disconnect and re-connect the power adaptor or cord to the WAP3205 v2.
- 4 If the problem continues, contact the vendor.

One of the LEDs does not behave as expected.

- 1 Make sure you understand the normal behavior of the LED. See [Section 1.7 on page 11](#).
- 2 Check the hardware connections. See the Quick Start Guide.
- 3 Inspect your cables for damage. Contact the vendor to replace any damaged cables.
- 4 Disconnect and re-connect the power adaptor to the WAP3205 v2.
- 5 If the problem continues, contact the vendor.

13.2 WAP3205 v2 Access and Login

I don't know the IP address of my WAP3205 v2.

- 1 The default web address is **http://zyxelsetup**.
- 2 Your WAP3205 v2 is a DHCP client by default. You can find the WAP3205 v2 IP address from the DHCP server. This information is only available from the DHCP server which allocates IP addresses on your network. Find this information directly from the DHCP server or contact your system administrator for more information.
- 3 If you configured a static management IP address for the WAP3205 v2 and have forgotten it, reset your WAP3205 v2 to change all settings back to their default. This means your current settings are lost. See [Section 13.4 on page 109](#) in the **Troubleshooting** for information on resetting your WAP3205 v2.

I forgot the password.

- 1 The default password is **1234**.
- 2 If this does not work, you have to reset the device to its factory defaults. See [Section 13.4 on page 109](#).

I cannot see or access the **Login** screen in the Web Configurator.

- 1 Make sure you are using the correct IP address.
 - The default web address is **http://zyxelsetup**.
 - If you configured a static management IP address for the WAP3205 v2 ([Section 11.4 on page 95](#)), use the new IP address.
 - If you configured a static management IP address for the WAP3205 v2 and have forgotten it, see the troubleshooting suggestions for [I don't know the IP address of my WAP3205 v2](#).
- 2 Check the hardware connections, and make sure the LEDs are behaving as expected. See the Quick Start Guide.
- 3 Make sure your Internet browser does not block pop-up windows and has JavaScripts and Java enabled. See [Appendix A on page 111](#).
- 4 Reset the device to its factory defaults, and try to access the WAP3205 v2 with the default web address. See [Section 13.4 on page 109](#).
- 5 If the problem continues, contact the network administrator or vendor, or try one of the advanced suggestions.

Advanced Suggestion

- If your computer is connected wirelessly, use a computer that is connected to a **LAN** port.

I can see the **Login** screen, but I cannot log in to the WAP3205 v2.

- 1 Make sure you have entered the password correctly. The default password is **1234**. This field is case-sensitive, so make sure [Caps Lock] is not on.
- 2 This can happen when you fail to log out properly from your last session. Try logging in again after 5 minutes.
- 3 Disconnect and re-connect the power adaptor or cord to the WAP3205 v2.
- 4 If this does not work, you have to reset the device to its factory defaults. See [Section 13.4 on page 109](#).

13.3 Internet Access

I cannot access the Internet.

- 1 Check the hardware connections, and make sure the LEDs are behaving as expected. See the Quick Start Guide.
- 2 Make sure the WAP3205 v2 is connected to a broadband modem or router with Internet access.
- 3 If you are trying to access the Internet wirelessly, make sure the wireless settings in the wireless client are the same as the settings in the AP.
 - Go to **Network > Wireless LAN > WDS** and check if the WAP3205 v2 is set to bridge mode. Select **Disable** and try to connect to the Internet again.
- 4 Disconnect all the cables from your device, and follow the directions in the Quick Start Guide again.
- 5 Check the switch on the WAP3205 v2's side panel for your system operating mode setting.
 - Use **AP** mode if your WAP3205 v2 bridges traffic between clients on the same network.
 - Use **CL** (Client) mode if your WAP3205 v2 needs a wireless client to connect to an existing access point.
 - Use **UR** (Universal Repeater) mode if you want to have wireless clients associate with the WAP3205 v2 and also want to connect the WAP3205 v2 to an existing access point.
- 6 If the problem continues, contact your ISP.

I cannot access the Internet anymore. I had access to the Internet (with the WAP3205 v2), but my Internet connection is not available anymore.

- 1 Check the hardware connections, and make sure the LEDs are behaving as expected. See the Quick Start Guide and [Section 1.7 on page 11](#).
- 2 Reboot the WAP3205 v2.
- 3 If the problem continues, contact your ISP.

The Internet connection is slow or intermittent.

- 1 There might be a lot of traffic on the network. Look at the LEDs, and check [Section 1.7 on page 11](#). If the WAP3205 v2 is sending or receiving a lot of information, try closing some programs that use the Internet, especially peer-to-peer applications.
- 2 Check the signal strength. If the signal strength is low, try moving the clients closer to the AP if possible, and look around to see if there are any devices that might be interfering with the wireless network (for example, microwaves, other wireless networks, and so on).
- 3 Reboot the WAP3205 v2.
- 4 If the problem continues, contact the network administrator or vendor, or try one of the advanced suggestions.

Advanced Suggestions

- Check the settings for QoS. If it is disabled, you might consider activating it.

13.4 Resetting the WAP3205 v2 to Its Factory Defaults

If you reset the WAP3205 v2, you lose all of the changes you have made. The WAP3205 v2 re-loads its default settings, and the password resets to **1234**. You have to make all of your changes again.

You will lose all of your changes when you push the **RESET** button.

To reset the WAP3205 v2,

- 1 Make sure the power LED is on.
- 2 Press the **RESET** button for one to five seconds to restart/reboot the WAP3205 v2.

- 3 Press the **RESET** button for longer than five seconds to set the WAP3205 v2 back to its factory-default configurations.

If the WAP3205 v2 restarts automatically, wait for the WAP3205 v2 to finish restarting, and log in to the Web Configurator. The password is "1234".

If the WAP3205 v2 does not restart automatically, disconnect and reconnect the WAP3205 v2's power. Then, follow the directions above again.

13.5 Wireless Router/AP Troubleshooting

I cannot access the WAP3205 v2 or ping any computer from the WLAN.

- 1 Make sure the wireless adapter on the wireless station is working properly.
- 2 Make sure the wireless adapter installed on your computer is IEEE 802.11 compatible and supports the same wireless standard as the WAP3205 v2.
- 3 Make sure your computer (with a wireless adapter installed) is within the transmission range of the WAP3205 v2.
- 4 Check that both the WAP3205 v2 and your wireless station are using the same wireless and wireless security settings.

Pop-up Windows, JavaScripts and Java Permissions

In order to use the web configurator you need to allow:

- Web browser pop-up windows from your device.
- JavaScripts (enabled by default).
- Java permissions (enabled by default).

Note: The screens used below belong to Internet Explorer version 6, 7 and 8. Screens for other Internet Explorer versions may vary.

Internet Explorer Pop-up Blockers


You may have to disable pop-up blocking to log into your device.

Either disable pop-up blocking (enabled by default in Windows XP SP (Service Pack) 2) or allow pop-up blocking and create an exception for your device's IP address.

Disable Pop-up Blockers

- 1 In Internet Explorer, select **Tools, Pop-up Blocker** and then select **Turn Off Pop-up Blocker**.

Figure 81 Pop-up Blocker

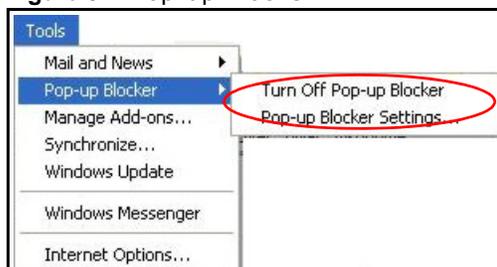

You can also check if pop-up blocking is disabled in the **Pop-up Blocker** section in the **Privacy** tab.

- 1 In Internet Explorer, select **Tools, Internet Options, Privacy**.
- 2 Clear the **Block pop-ups** check box in the **Pop-up Blocker** section of the screen. This disables any web pop-up blockers you may have enabled.

Figure 82 Internet Options: Privacy

- 3 Click **Apply** to save this setting.

Enable Pop-up Blockers with Exceptions

Alternatively, if you only want to allow pop-up windows from your device, see the following steps.

- 1 In Internet Explorer, select **Tools, Internet Options** and then the **Privacy** tab.
- 2 Select **Settings...** to open the **Pop-up Blocker Settings** screen.

Figure 83 Internet Options: Privacy

- 3 Type the IP address of your device (the web page that you do not want to have blocked) with the prefix "http://". For example, http://192.168.167.1.
- 4 Click **Add** to move the IP address to the list of **Allowed sites**.

Figure 84 Pop-up Blocker Settings


- 5 Click **Close** to return to the **Privacy** screen.
- 6 Click **Apply** to save this setting.

JavaScripts


If pages of the web configurator do not display properly in Internet Explorer, check that JavaScripts are allowed.

- 1 In Internet Explorer, click **Tools**, **Internet Options** and then the **Security** tab.

Figure 85 Internet Options: Security

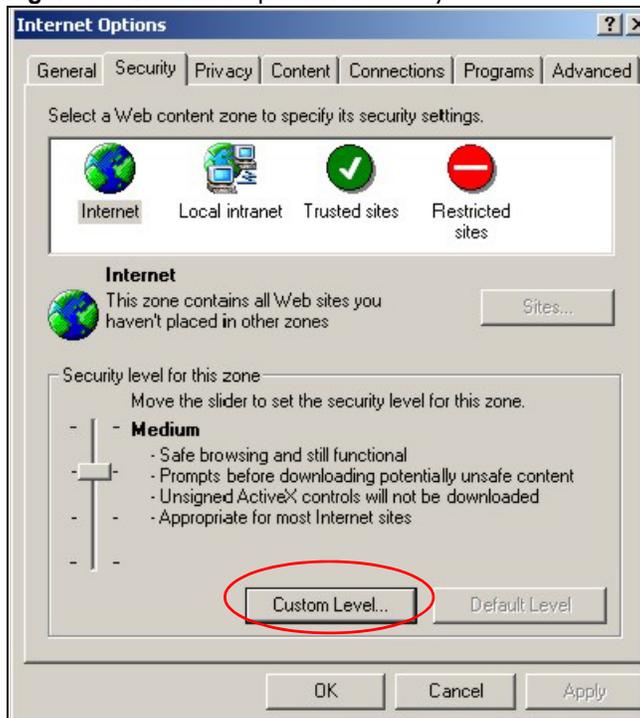


- 2 Click the **Custom Level...** button.
- 3 Scroll down to **Scripting**.
- 4 Under **Active scripting** make sure that **Enable** is selected (the default).
- 5 Under **Scripting of Java applets** make sure that **Enable** is selected (the default).
- 6 Click **OK** to close the window.

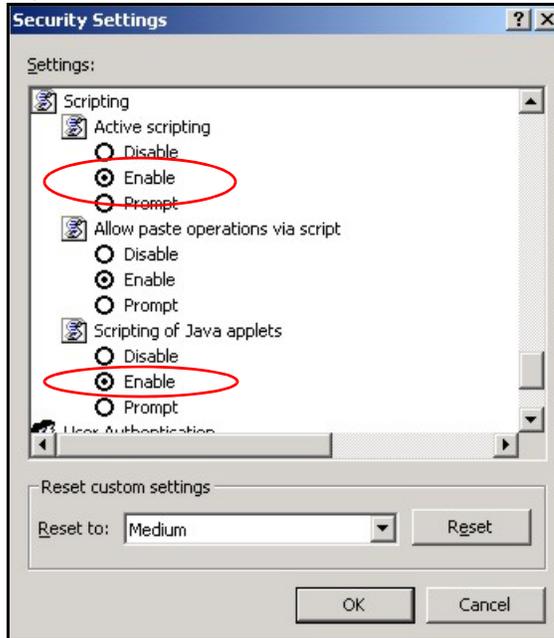Figure 86 Security Settings - Java Scripting

Java Permissions

- 1 From Internet Explorer, click **Tools, Internet Options** and then the **Security** tab.
- 2 Click the **Custom Level...** button.
- 3 Scroll down to **Microsoft VM**.
- 4 Under **Java permissions** make sure that a safety level is selected.
- 5 Click **OK** to close the window.


Figure 87 Security Settings - Java

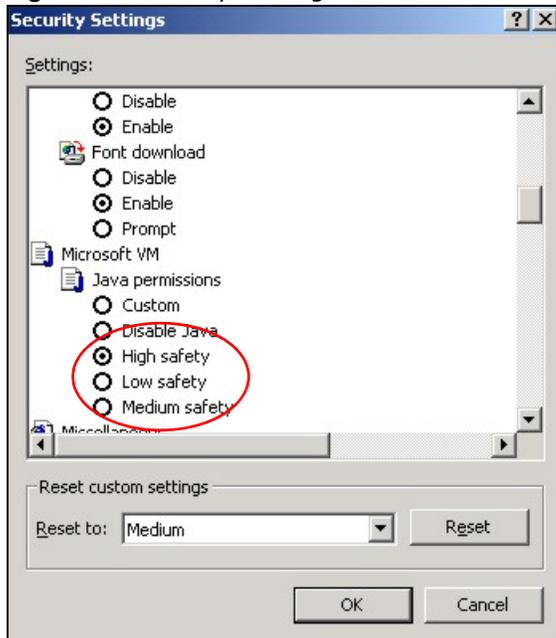

JAVA (Sun)

- 1 From Internet Explorer, click **Tools, Internet Options** and then the **Advanced** tab.
- 2 Make sure that **Use Java 2 for <applet>** under **Java (Sun)** is selected.
- 3 Click **OK** to close the window.

Figure 88 Java (Sun)

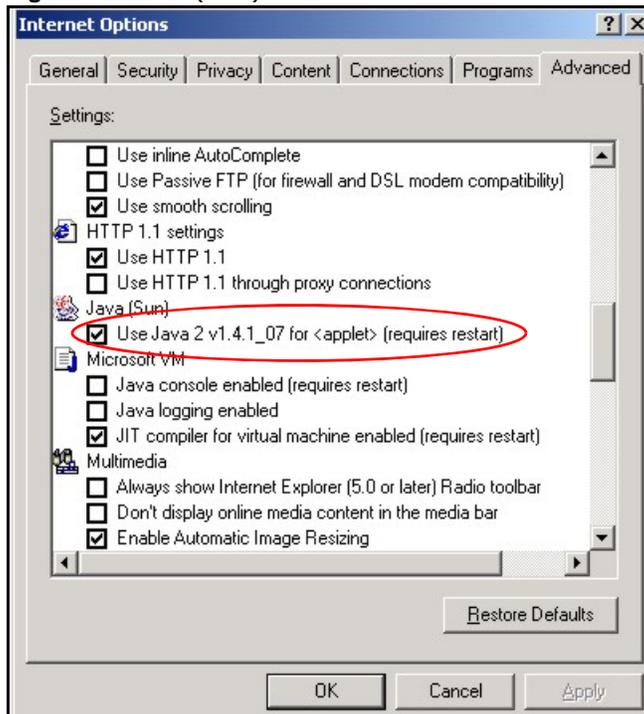

Mozilla Firefox

Mozilla Firefox 2.0 screens are used here. Screens for other versions may vary slightly. The steps below apply to Mozilla Firefox 3.0 as well.


You can enable Java, Javascripts and pop-ups in one screen. Click **Tools**, then click **Options** in the screen that appears.

Figure 89 Mozilla Firefox: TOOLS > Options



Click **Content** to show the screen below. Select the check boxes as shown in the following screen.

Figure 90 Mozilla Firefox Content Security

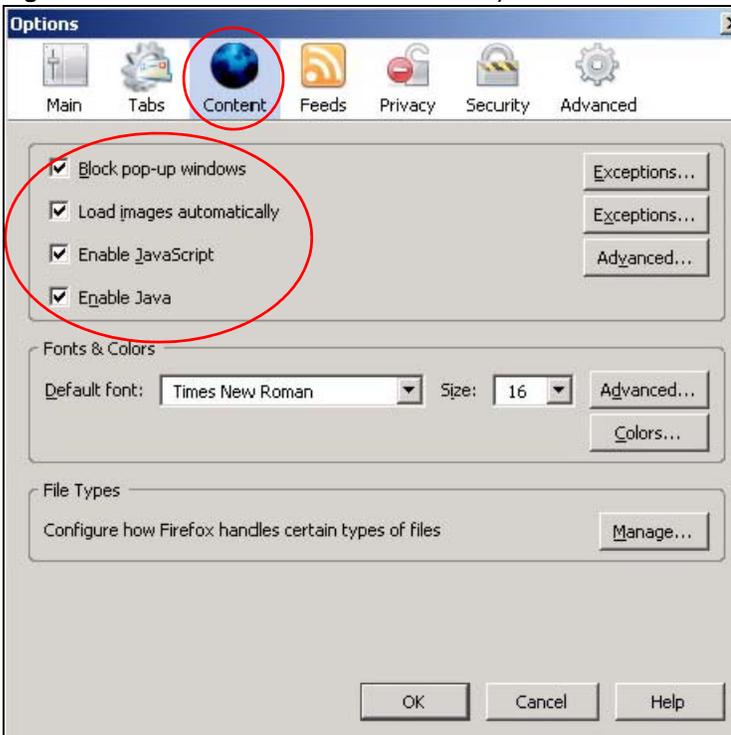


Opera

Opera 10 screens are used here. Screens for other versions may vary slightly.

Allowing Pop-Ups

From Opera, click **Tools**, then **Preferences**. In the **General** tab, go to **Choose how you prefer to handle pop-ups** and select **Open all pop-ups**.


Figure 91 Opera: Allowing Pop-Ups

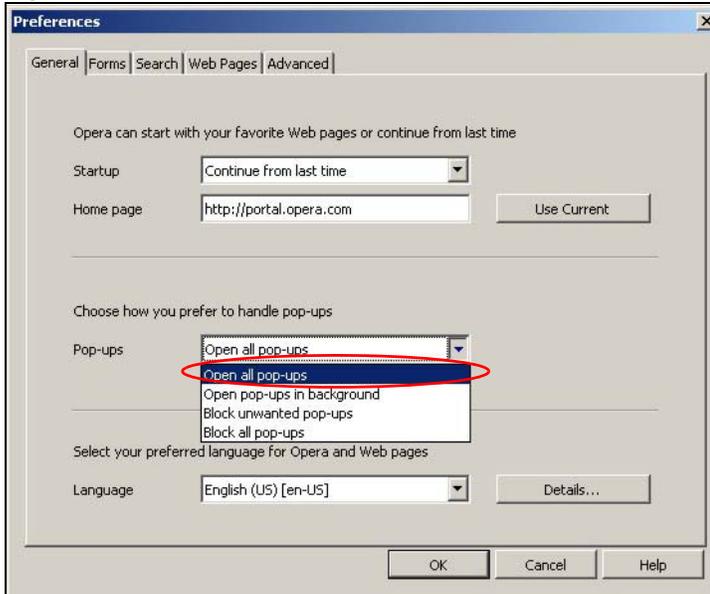

Enabling Java


From Opera, click **Tools**, then **Preferences**. In the **Advanced** tab, select **Content** from the left-side menu. Select the check boxes as shown in the following screen.

Figure 92 Opera: Enabling Java

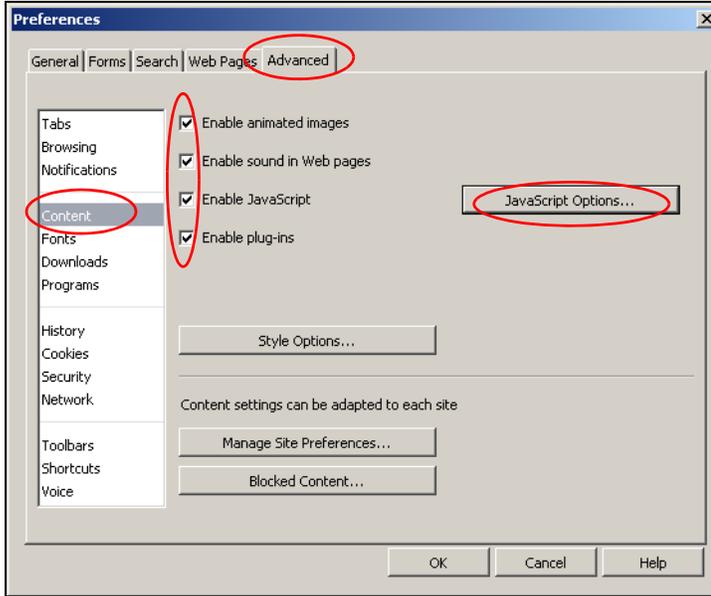

To customize JavaScript behavior in the Opera browser, click **JavaScript Options**.

Figure 93 Opera: JavaScript Options

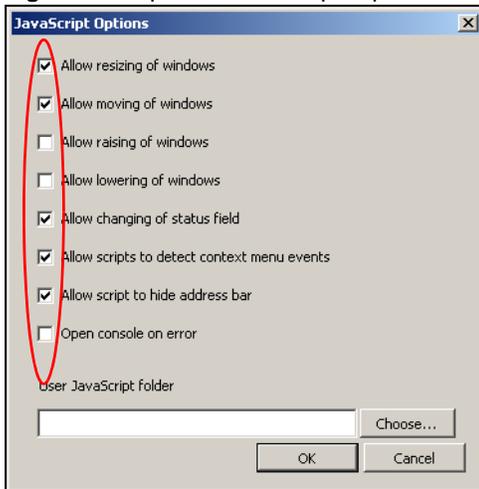

Select the items you want Opera's JavaScript to apply.

IP Addresses and Subnetting

This appendix introduces IP addresses and subnet masks.

IP addresses identify individual devices on a network. Every networking device (including computers, servers, routers, printers, etc.) needs an IP address to communicate across the network. These networking devices are also known as hosts.

Subnet masks determine the maximum number of possible hosts on a network. You can also use subnet masks to divide one network into multiple sub-networks.

Introduction to IP Addresses


One part of the IP address is the network number, and the other part is the host ID. In the same way that houses on a street share a common street name, the hosts on a network share a common network number. Similarly, as each house has its own house number, each host on the network has its own unique identifying number - the host ID. Routers use the network number to send packets to the correct network, while the host ID determines to which host on the network the packets are delivered.

Structure

An IP address is made up of four parts, written in dotted decimal notation (for example, 192.168.1.1). Each of these four parts is known as an octet. An octet is an eight-digit binary number (for example 11000000, which is 192 in decimal notation).

Therefore, each octet has a possible range of 00000000 to 11111111 in binary, or 0 to 255 in decimal.

The following figure shows an example IP address in which the first three octets (192.168.1) are the network number, and the fourth octet (16) is the host ID.

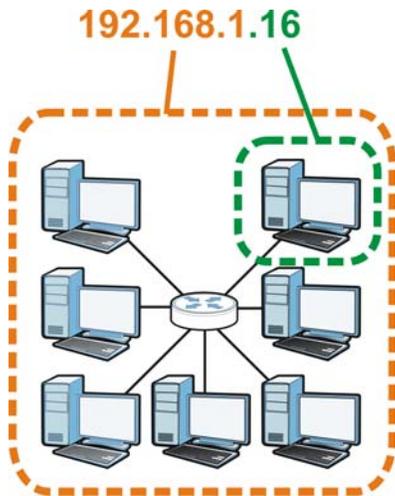Figure 94 Network Number and Host ID

How much of the IP address is the network number and how much is the host ID varies according to the subnet mask.

Subnet Masks

A subnet mask is used to determine which bits are part of the network number, and which bits are part of the host ID (using a logical AND operation). The term “subnet” is short for “sub-network”.

A subnet mask has 32 bits. If a bit in the subnet mask is a “1” then the corresponding bit in the IP address is part of the network number. If a bit in the subnet mask is “0” then the corresponding bit in the IP address is part of the host ID.

The following example shows a subnet mask identifying the network number (in bold text) and host ID of an IP address (192.168.1.2 in decimal).

Table 51 IP Address Network Number and Host ID Example

	1ST OCTET: (192)	2ND OCTET: (168)	3RD OCTET: (1)	4TH OCTET (2)
IP Address (Binary)	11000000	10101000	00000001	00000010
Subnet Mask (Binary)	11111111	11111111	11111111	00000000
Network Number	11000000	10101000	00000001	
Host ID				00000010

By convention, subnet masks always consist of a continuous sequence of ones beginning from the leftmost bit of the mask, followed by a continuous sequence of zeros, for a total number of 32 bits.

Subnet masks can be referred to by the size of the network number part (the bits with a “1” value). For example, an “8-bit mask” means that the first 8 bits of the mask are ones and the remaining 24 bits are zeroes.

Subnet masks are expressed in dotted decimal notation just like IP addresses. The following examples show the binary and decimal notation for 8-bit, 16-bit, 24-bit and 29-bit subnet masks.

Table 52 Subnet Masks

	BINARY				DECIMAL
	1ST OCTET	2ND OCTET	3RD OCTET	4TH OCTET	
8-bit mask	11111111	00000000	00000000	00000000	255.0.0.0
16-bit mask	11111111	11111111	00000000	00000000	255.255.0.0
24-bit mask	11111111	11111111	11111111	00000000	255.255.255.0
29-bit mask	11111111	11111111	11111111	11111000	255.255.255.248

Network Size

The size of the network number determines the maximum number of possible hosts you can have on your network. The larger the number of network number bits, the smaller the number of remaining host ID bits.

An IP address with host IDs of all zeros is the IP address of the network (192.168.1.0 with a 24-bit subnet mask, for example). An IP address with host IDs of all ones is the broadcast address for that network (192.168.1.255 with a 24-bit subnet mask, for example).

As these two IP addresses cannot be used for individual hosts, calculate the maximum number of possible hosts in a network as follows:

Table 53 Maximum Host Numbers

SUBNET MASK		HOST ID SIZE		MAXIMUM NUMBER OF HOSTS
8 bits	255.0.0.0	24 bits	$2^{24} - 2$	16777214
16 bits	255.255.0.0	16 bits	$2^{16} - 2$	65534
24 bits	255.255.255.0	8 bits	$2^8 - 2$	254
29 bits	255.255.255.248	3 bits	$2^3 - 2$	6

Notation

Since the mask is always a continuous number of ones beginning from the left, followed by a continuous number of zeros for the remainder of the 32 bit mask, you can simply specify the number of ones instead of writing the value of each octet. This is usually specified by writing a "/" followed by the number of bits in the mask after the address.

For example, 192.1.1.0 /25 is equivalent to saying 192.1.1.0 with subnet mask 255.255.255.128.

The following table shows some possible subnet masks using both notations.

Table 54 Alternative Subnet Mask Notation

SUBNET MASK	ALTERNATIVE NOTATION	LAST OCTET (BINARY)	LAST OCTET (DECIMAL)
255.255.255.0	/24	0000 0000	0
255.255.255.128	/25	1000 0000	128
255.255.255.192	/26	1100 0000	192

Table 54 Alternative Subnet Mask Notation (continued)


SUBNET MASK	ALTERNATIVE NOTATION	LAST OCTET (BINARY)	LAST OCTET (DECIMAL)
255.255.255.224	/27	1110 0000	224
255.255.255.240	/28	1111 0000	240
255.255.255.248	/29	1111 1000	248
255.255.255.252	/30	1111 1100	252

Subnetting

You can use subnetting to divide one network into multiple sub-networks. In the following example a network administrator creates two sub-networks to isolate a group of servers from the rest of the company network for security reasons.

In this example, the company network address is 192.168.1.0. The first three octets of the address (192.168.1) are the network number, and the remaining octet is the host ID, allowing a maximum of $2^8 - 2$ or 254 possible hosts.

The following figure shows the company network before subnetting.

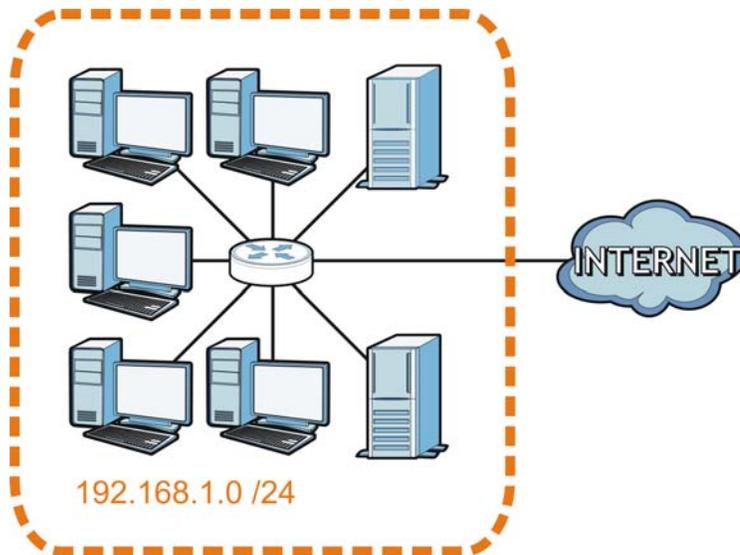
Figure 95 Subnetting Example: Before Subnetting

You can “borrow” one of the host ID bits to divide the network 192.168.1.0 into two separate sub-networks. The subnet mask is now 25 bits (255.255.255.128 or /25).

The “borrowed” host ID bit can have a value of either 0 or 1, allowing two subnets; 192.168.1.0 /25 and 192.168.1.128 /25.

The following figure shows the company network after subnetting. There are now two sub-networks, **A** and **B**.

Figure 96 Subnetting Example: After Subnetting

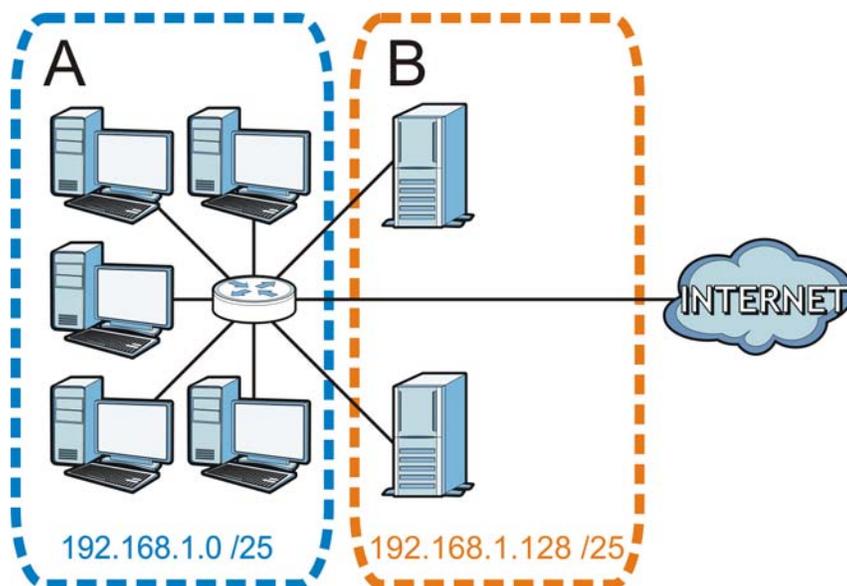

In a 25-bit subnet the host ID has 7 bits, so each sub-network has a maximum of $2^7 - 2$ or 126 possible hosts (a host ID of all zeroes is the subnet’s address itself, all ones is the subnet’s broadcast address).

192.168.1.0 with mask 255.255.255.128 is subnet **A** itself, and 192.168.1.127 with mask 255.255.255.128 is its broadcast address. Therefore, the lowest IP address that can be assigned to an actual host for subnet **A** is 192.168.1.1 and the highest is 192.168.1.126.

Similarly, the host ID range for subnet **B** is 192.168.1.129 to 192.168.1.254.

Example: Four Subnets

The previous example illustrated using a 25-bit subnet mask to divide a 24-bit address into two subnets. Similarly, to divide a 24-bit address into four subnets, you need to “borrow” two host ID bits to give four possible combinations (00, 01, 10 and 11). The subnet mask is 26 bits (11111111.11111111.11111111.11000000) or 255.255.255.192.

Each subnet contains 6 host ID bits, giving $2^6 - 2$ or 62 hosts for each subnet (a host ID of all zeroes is the subnet itself, all ones is the subnet’s broadcast address).

Table 55 Subnet 1

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address (Decimal)	192.168.1.	0
IP Address (Binary)	11000000.10101000.00000001.	00000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.0	Lowest Host ID: 192.168.1.1	
Broadcast Address: 192.168.1.63	Highest Host ID: 192.168.1.62	

Table 56 Subnet 2

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address	192.168.1.	64
IP Address (Binary)	11000000.10101000.00000001.	01000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.64	Lowest Host ID: 192.168.1.65	
Broadcast Address: 192.168.1.127	Highest Host ID: 192.168.1.126	

Table 57 Subnet 3

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address	192.168.1.	128
IP Address (Binary)	11000000.10101000.00000001.	10000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.128	Lowest Host ID: 192.168.1.129	
Broadcast Address: 192.168.1.191	Highest Host ID: 192.168.1.190	

Table 58 Subnet 4

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address	192.168.1.	192
IP Address (Binary)	11000000.10101000.00000001.	11000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.192	Lowest Host ID: 192.168.1.193	
Broadcast Address: 192.168.1.255	Highest Host ID: 192.168.1.254	

Example: Eight Subnets

Similarly, use a 27-bit mask to create eight subnets (000, 001, 010, 011, 100, 101, 110 and 111).

The following table shows IP address last octet values for each subnet.

Table 59 Eight Subnets

SUBNET	SUBNET ADDRESS	FIRST ADDRESS	LAST ADDRESS	BROADCAST ADDRESS
1	0	1	30	31
2	32	33	62	63
3	64	65	94	95
4	96	97	126	127
5	128	129	158	159
6	160	161	190	191

Table 59 Eight Subnets (continued)

SUBNET	SUBNET ADDRESS	FIRST ADDRESS	LAST ADDRESS	BROADCAST ADDRESS
7	192	193	222	223
8	224	225	254	255

Subnet Planning

The following table is a summary for subnet planning on a network with a 24-bit network number.

Table 60 24-bit Network Number Subnet Planning

NO. "BORROWED" HOST BITS	SUBNET MASK	NO. SUBNETS	NO. HOSTS PER SUBNET
1	255.255.255.128 (/25)	2	126
2	255.255.255.192 (/26)	4	62
3	255.255.255.224 (/27)	8	30
4	255.255.255.240 (/28)	16	14
5	255.255.255.248 (/29)	32	6
6	255.255.255.252 (/30)	64	2
7	255.255.255.254 (/31)	128	1

The following table is a summary for subnet planning on a network with a 16-bit network number.

Table 61 16-bit Network Number Subnet Planning

NO. "BORROWED" HOST BITS	SUBNET MASK	NO. SUBNETS	NO. HOSTS PER SUBNET
1	255.255.128.0 (/17)	2	32766
2	255.255.192.0 (/18)	4	16382
3	255.255.224.0 (/19)	8	8190
4	255.255.240.0 (/20)	16	4094
5	255.255.248.0 (/21)	32	2046
6	255.255.252.0 (/22)	64	1022
7	255.255.254.0 (/23)	128	510
8	255.255.255.0 (/24)	256	254
9	255.255.255.128 (/25)	512	126
10	255.255.255.192 (/26)	1024	62
11	255.255.255.224 (/27)	2048	30
12	255.255.255.240 (/28)	4096	14
13	255.255.255.248 (/29)	8192	6
14	255.255.255.252 (/30)	16384	2
15	255.255.255.254 (/31)	32768	1

Configuring IP Addresses

Where you obtain your network number depends on your particular situation. If the ISP or your network administrator assigns you a block of registered IP addresses, follow their instructions in selecting the IP addresses and the subnet mask.

If the ISP did not explicitly give you an IP network number, then most likely you have a single user account and the ISP will assign you a dynamic IP address when the connection is established. If this is the case, it is recommended that you select a network number from 192.168.0.0 to 192.168.255.0. The Internet Assigned Number Authority (IANA) reserved this block of addresses specifically for private use; please do not use any other number unless you are told otherwise. You must also enable Network Address Translation (NAT) on the WAP3205 v2.

Once you have decided on the network number, pick an IP address for your WAP3205 v2 that is easy to remember (for instance, 192.168.1.1) but make sure that no other device on your network is using that IP address.

The subnet mask specifies the network number portion of an IP address. Your WAP3205 v2 will compute the subnet mask automatically based on the IP address that you entered. You don't need to change the subnet mask computed by the WAP3205 v2 unless you are instructed to do otherwise.

Private IP Addresses

Every machine on the Internet must have a unique address. If your networks are isolated from the Internet (running only between two branch offices, for example) you can assign any IP addresses to the hosts without problems. However, the Internet Assigned Numbers Authority (IANA) has reserved the following three blocks of IP addresses specifically for private networks:

- 10.0.0.0 — 10.255.255.255
- 172.16.0.0 — 172.31.255.255
- 192.168.0.0 — 192.168.255.255

You can obtain your IP address from the IANA, from an ISP, or it can be assigned from a private network. If you belong to a small organization and your Internet access is through an ISP, the ISP can provide you with the Internet addresses for your local networks. On the other hand, if you are part of a much larger organization, you should consult your network administrator for the appropriate IP addresses.

Regardless of your particular situation, do not create an arbitrary IP address; always follow the guidelines above. For more information on address assignment, please refer to RFC 1597, Address Allocation for Private Internets and RFC 1466, Guidelines for Management of IP Address Space.


IP Address Conflicts

Each device on a network must have a unique IP address. Devices with duplicate IP addresses on the same network will not be able to access the Internet or other resources. The devices may also be unreachable through the network.

Conflicting Computer IP Addresses Example

More than one device can not use the same IP address. In the following example computer **A** has a static (or fixed) IP address that is the same as the IP address that a DHCP server assigns to computer **B** which is a DHCP client. Neither can access the Internet. This problem can be solved by assigning a different static IP address to computer **A** or setting computer **A** to obtain an IP address automatically.


Figure 97 Conflicting Computer IP Addresses Example

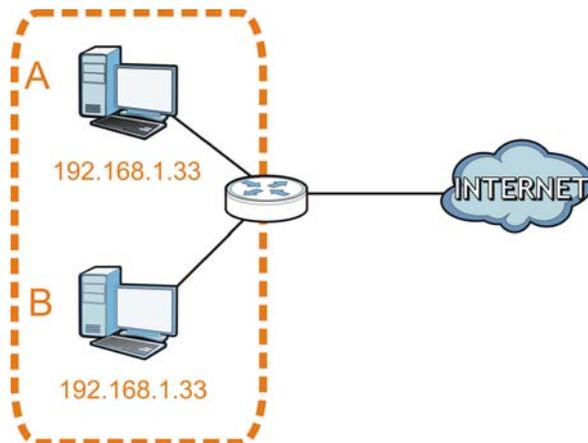

Conflicting Router IP Addresses Example

Since a router connects different networks, it must have interfaces using different network numbers. For example, if a router is set between a LAN and the Internet (WAN), the router's LAN and WAN addresses must be on different subnets. In the following example, the LAN and WAN are on the same subnet. The LAN computers cannot access the Internet because the router cannot route between networks.


Figure 98 Conflicting Router IP Addresses Example

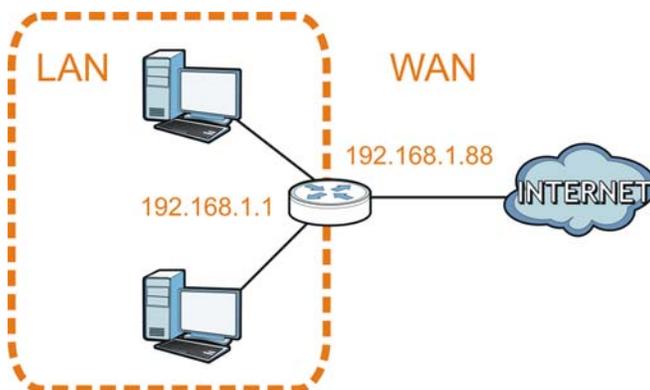

Conflicting Computer and Router IP Addresses Example

More than one device can not use the same IP address. In the following example, the computer and the router's LAN port both use 192.168.1.1 as the IP address. The computer cannot access the Internet. This problem can be solved by assigning a different IP address to the computer or the router's LAN port.

Figure 99 Conflicting Computer and Router IP Addresses Example

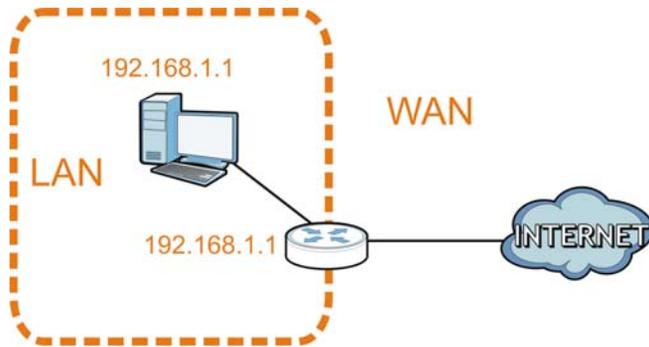

Setting Up Your Computer's IP Address

Note: Your specific WAP3205 v2 may not support all of the operating systems described in this appendix. See the product specifications for more information about which operating systems are supported.

This appendix shows you how to configure the IP settings on your computer in order for it to be able to communicate with the other devices on your network. Windows Vista/XP/2000, Mac OS 9/OS X, and all versions of UNIX/LINUX include the software components you need to use TCP/IP on your computer.

If you manually assign IP information instead of using a dynamic IP, make sure that your network's computers have IP addresses that place them in the same subnet.

In this appendix, you can set up an IP address for:

- [Windows XP/NT/2000](#) on [page 130](#)
- [Windows Vista](#) on [page 134](#)
- [Windows 7](#) on [page 138](#)
- [Mac OS X: 10.3 and 10.4](#) on [page 142](#)
- [Mac OS X: 10.5 and 10.6](#) on [page 145](#)
- [Linux: Ubuntu 8 \(GNOME\)](#) on [page 148](#)
- [Linux: openSUSE 10.3 \(KDE\)](#) on [page 152](#)


Windows XP/NT/2000

The following example uses the default Windows XP display theme but can also apply to Windows 2000 and Windows NT.


- 1 Click **Start > Control Panel**.




- 2 In the **Control Panel**, click the **Network Connections** icon.

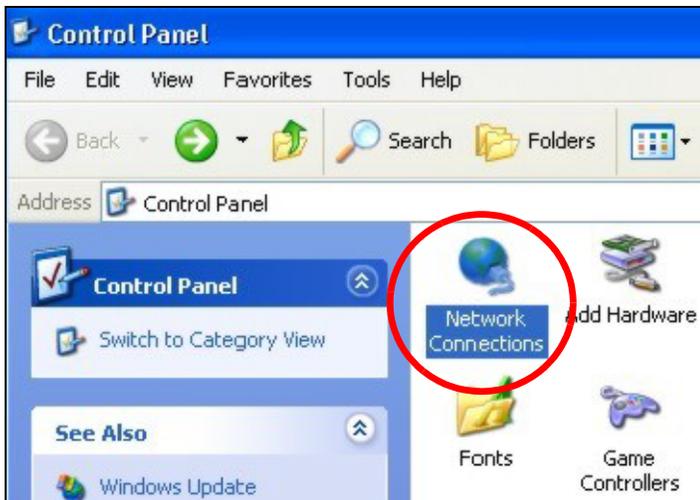


- 3 Right-click **Local Area Connection** and then select **Properties**.

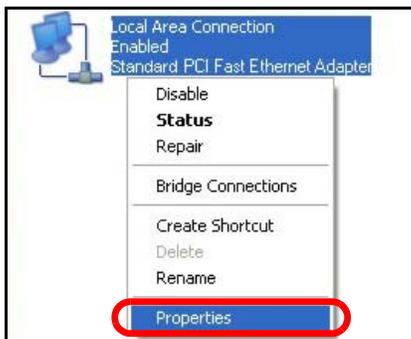

- 4 On the **General** tab, select **Internet Protocol (TCP/IP)** and then click **Properties**.

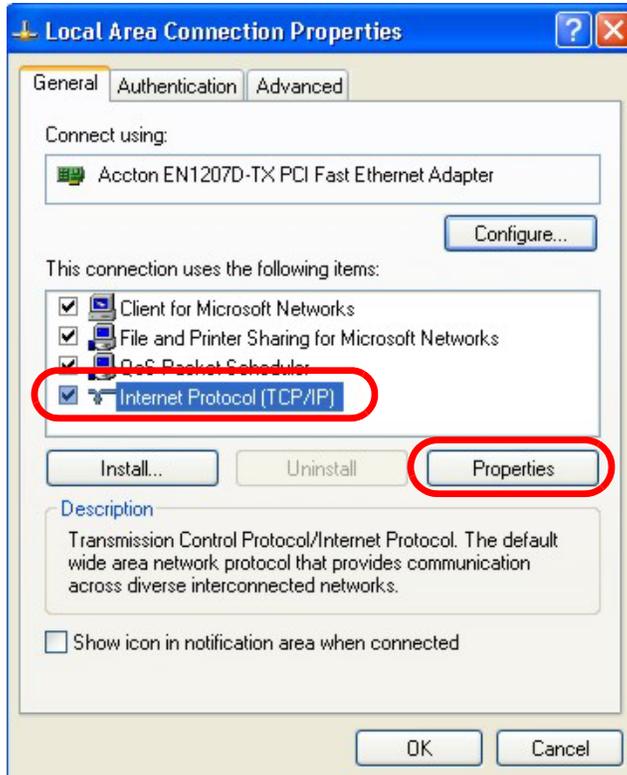

- 5 The **Internet Protocol TCP/IP Properties** window opens.

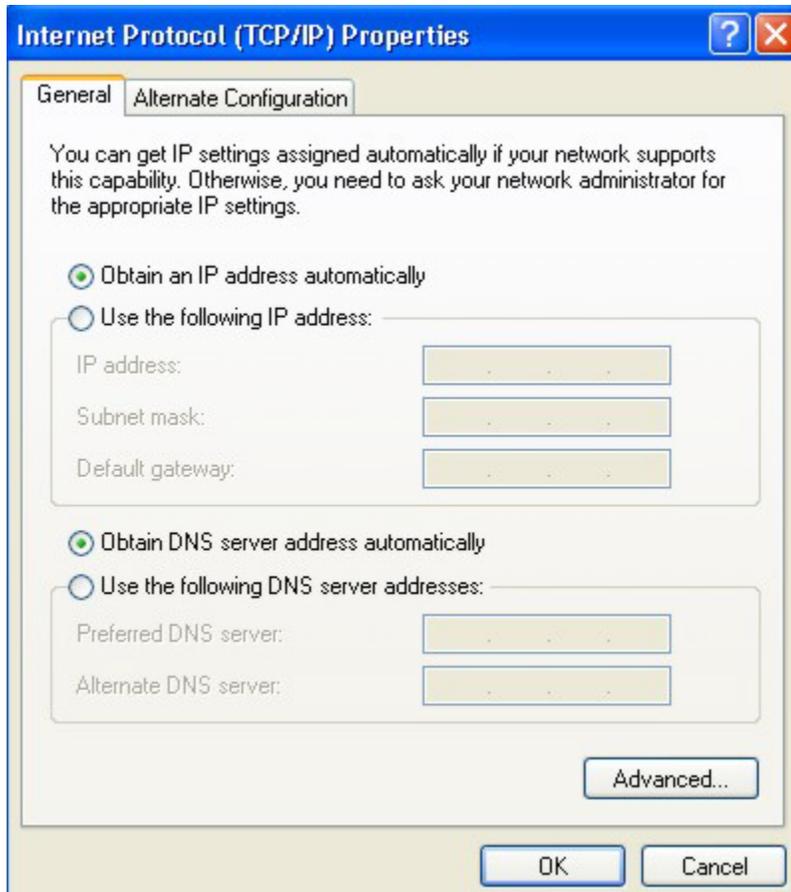

- 6 Select **Obtain an IP address automatically** if your network administrator or ISP assigns your IP address dynamically.
Select **Use the following IP Address** and fill in the **IP address**, **Subnet mask**, and **Default gateway** fields if you have a static IP address that was assigned to you by your network administrator or ISP. You may also have to enter a **Preferred DNS server** and an **Alternate DNS server**, if that information was provided.
- 7 Click **OK** to close the **Internet Protocol (TCP/IP) Properties** window.
- 8 Click **OK** to close the **Local Area Connection Properties** window.

Verifying Settings

- 1 Click **Start > All Programs > Accessories > Command Prompt**.
- 2 In the **Command Prompt** window, type "ipconfig" and then press [ENTER].
You can also go to **Start > Control Panel > Network Connections**, right-click a network connection, click **Status** and then click the **Support** tab to view your IP address and connection information.


Windows Vista

This section shows screens from Windows Vista Professional.

- 1 Click **Start > Control Panel**.




- 2 In the **Control Panel**, click the **Network and Internet** icon.

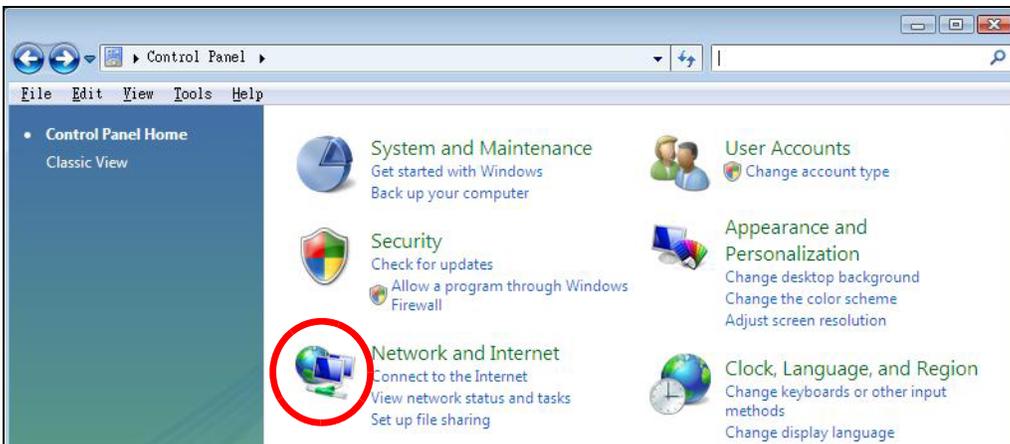


- 3 Click the **Network and Sharing Center** icon.



- 4 Click **Manage network connections**.

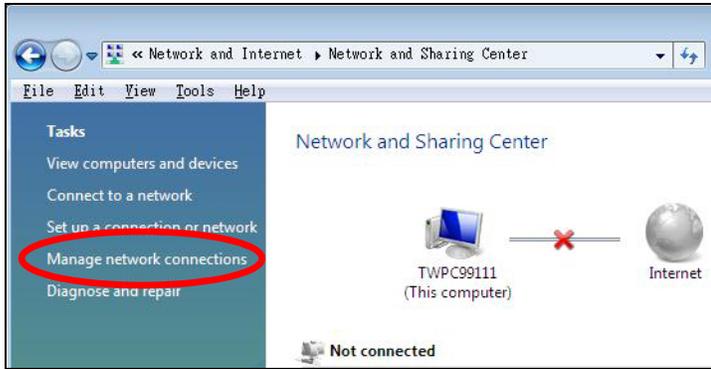


- 5 Right-click **Local Area Connection** and then select **Properties**.

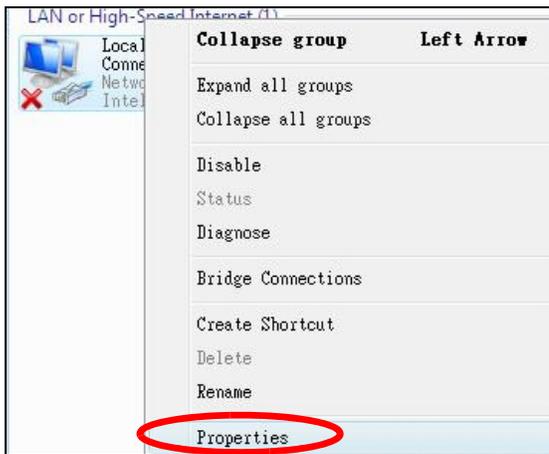


Note: During this procedure, click **Continue** whenever Windows displays a screen saying that it needs your permission to continue.

- 6 Select **Internet Protocol Version 4 (TCP/IPv4)** and then select **Properties**.

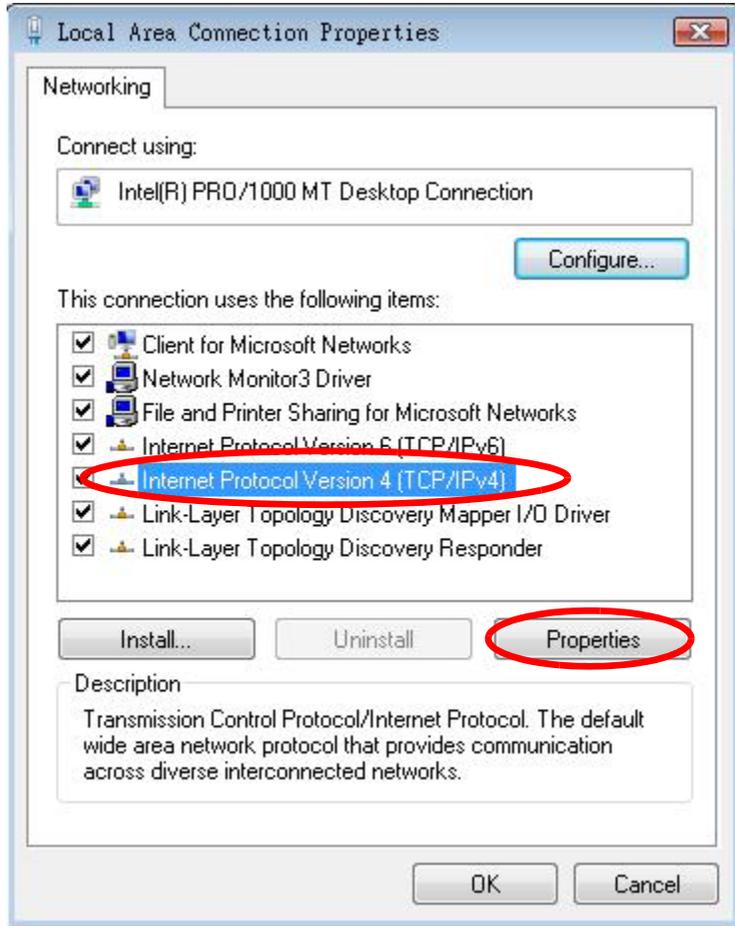

- 7 The **Internet Protocol Version 4 (TCP/IPv4) Properties** window opens.

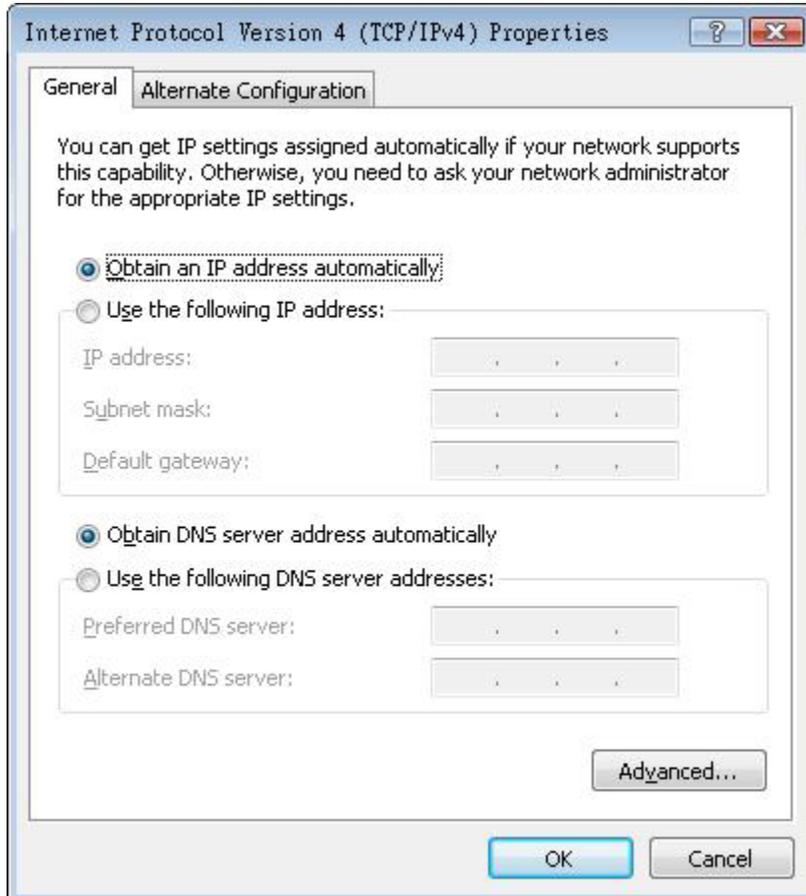

- 8 Select **Obtain an IP address automatically** if your network administrator or ISP assigns your IP address dynamically.

Select **Use the following IP Address** and fill in the **IP address**, **Subnet mask**, and **Default gateway** fields if you have a static IP address that was assigned to you by your network administrator or ISP. You may also have to enter a **Preferred DNS server** and an **Alternate DNS server**, if that information was provided. Click **Advanced**.

- 9 Click **OK** to close the **Internet Protocol (TCP/IP) Properties** window.
- 10 Click **OK** to close the **Local Area Connection Properties** window.

Verifying Settings


- 1 Click **Start > All Programs > Accessories > Command Prompt**.
- 2 In the **Command Prompt** window, type "ipconfig" and then press [ENTER].

You can also go to **Start > Control Panel > Network Connections**, right-click a network connection, click **Status** and then click the **Support** tab to view your IP address and connection information.


Windows 7

This section shows screens from Windows 7 Enterprise.


- 1 Click **Start > Control Panel**.

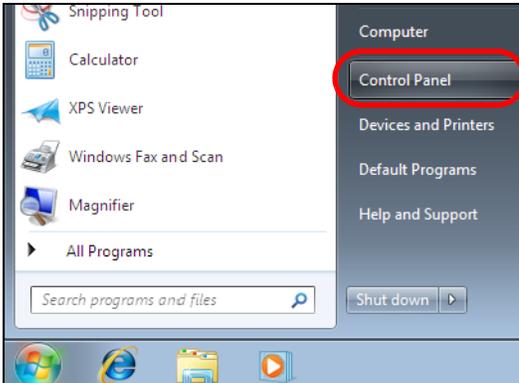


- 2 In the **Control Panel**, click **View network status and tasks** under the **Network and Internet** category.

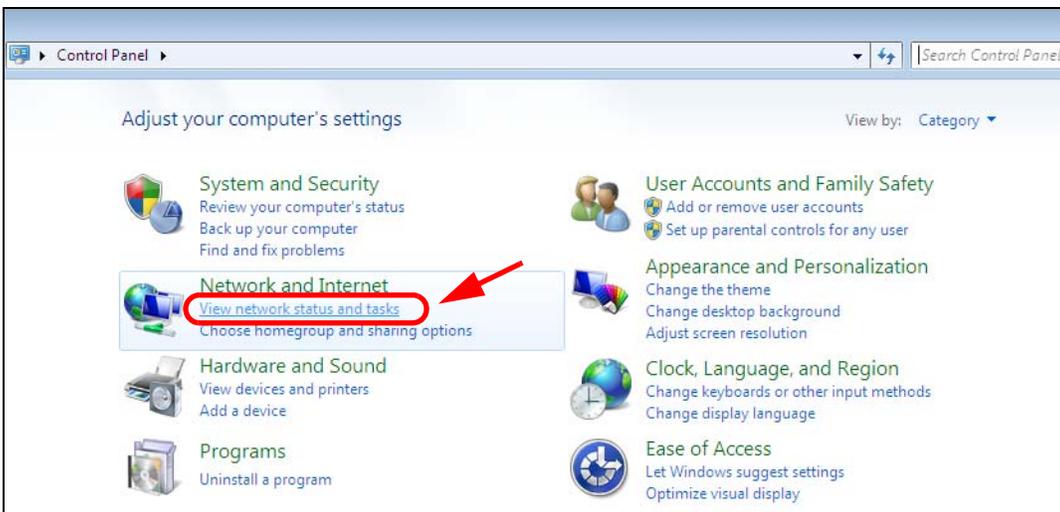

- 3 Click **Change adapter settings**.

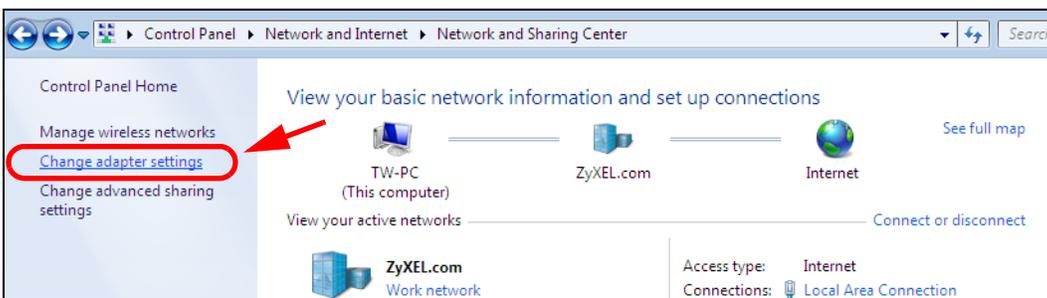


- 4 Double click **Local Area Connection** and then select **Properties**.

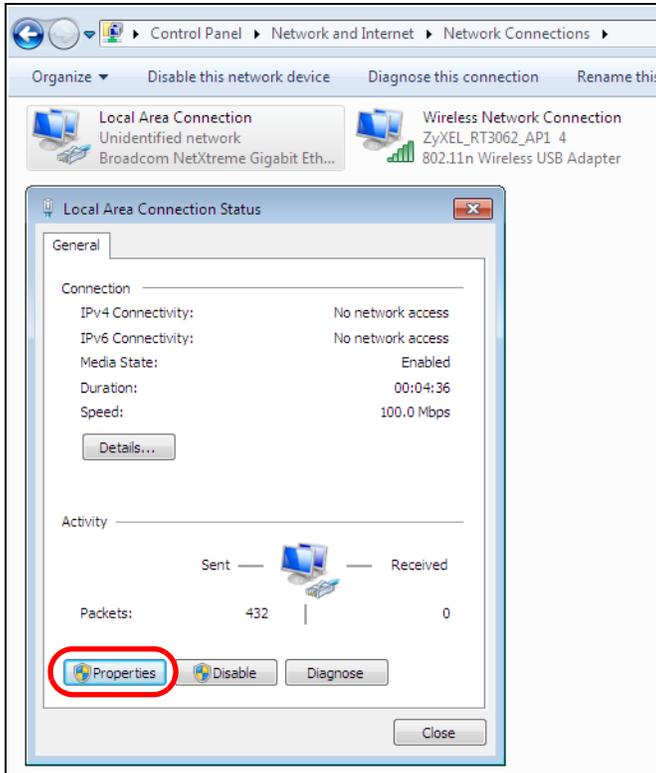


Note: During this procedure, click **Continue** whenever Windows displays a screen saying that it needs your permission to continue.

- 5 Select **Internet Protocol Version 4 (TCP/IPv4)** and then select **Properties**.

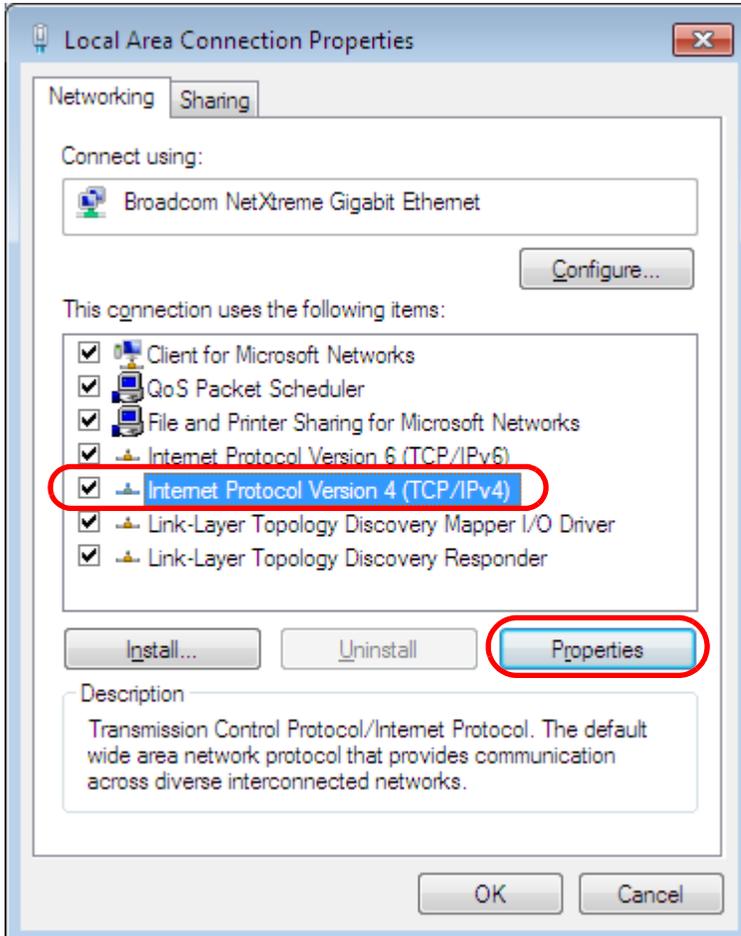

6 The Internet Protocol Version 4 (TCP/IPv4) Properties window opens.

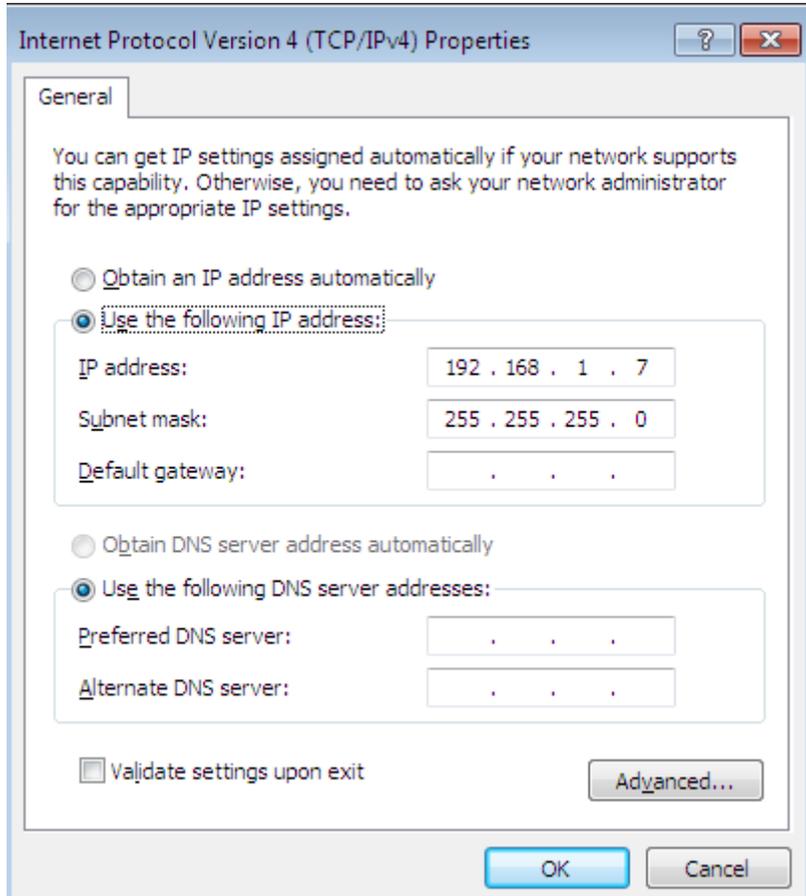


- 7 Select **Obtain an IP address automatically** if your network administrator or ISP assigns your IP address dynamically.

Select **Use the following IP Address** and fill in the **IP address**, **Subnet mask**, and **Default gateway** fields if you have a static IP address that was assigned to you by your network administrator or ISP. You may also have to enter a **Preferred DNS server** and an **Alternate DNS server**, if that information was provided. Click **Advanced** if you want to configure advanced settings for IP, DNS and WINS.

- 8 Click **OK** to close the **Internet Protocol (TCP/IP) Properties** window.
- 9 Click **OK** to close the **Local Area Connection Properties** window.

Verifying Settings

- 1 Click **Start > All Programs > Accessories > Command Prompt**.
- 2 In the **Command Prompt** window, type "ipconfig" and then press [ENTER].
- 3 The IP settings are displayed as follows.

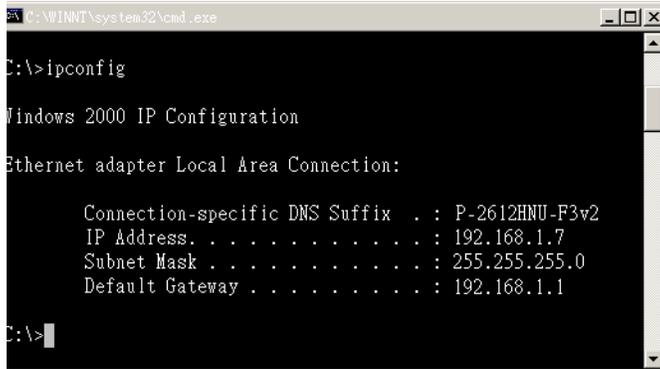

```
C:\WINNT\system32\cmd.exe
C:\>ipconfig

Windows 2000 IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : P-2612HNU-F3v2
    IP Address. . . . . : 192.168.1.7
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.1.1

C:\>
```

Mac OS X: 10.3 and 10.4

The screens in this section are from Mac OS X 10.4 but can also apply to 10.3.


- 1 Click **Apple** > **System Preferences**.




- 2 In the **System Preferences** window, click the **Network** icon.




- 3 When the **Network** preferences pane opens, select **Built-in Ethernet** from the network connection type list, and then click **Configure**.

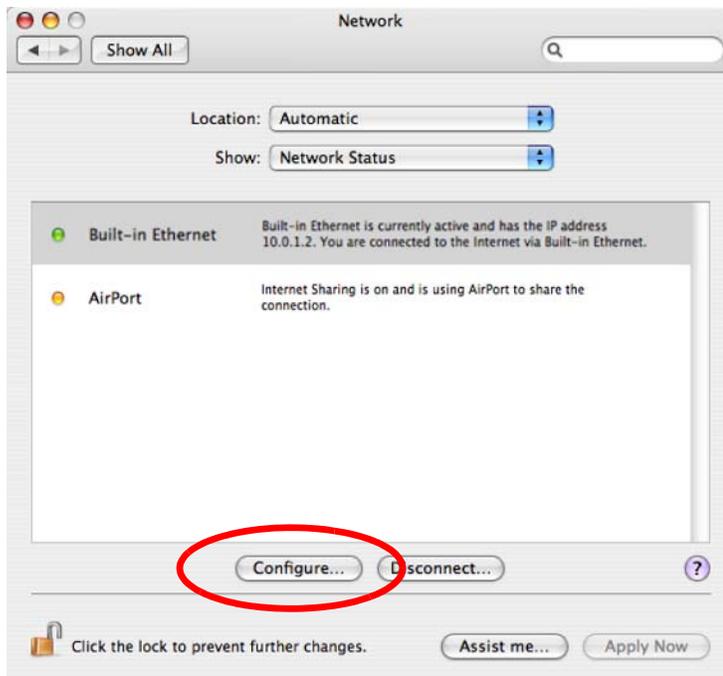

- 4 For dynamically assigned settings, select **Using DHCP** from the **Configure IPv4** list in the **TCP/IP** tab.

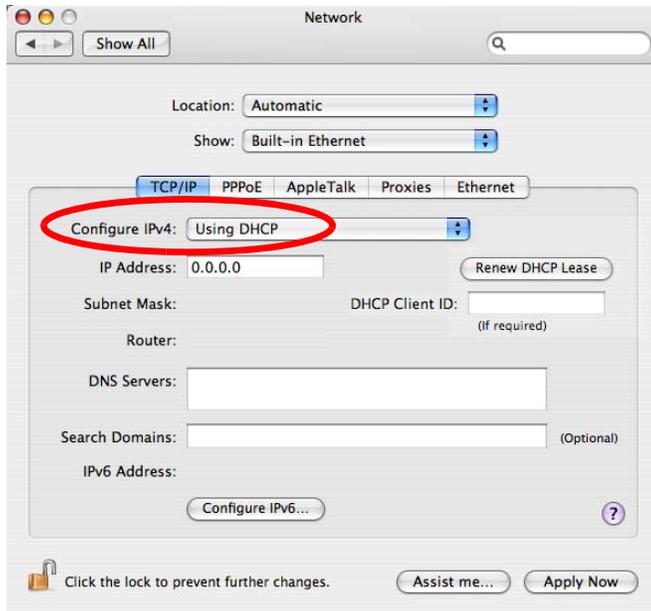


- 5 For statically assigned settings, do the following:
 - From the **Configure IPv4** list, select **Manually**.
 - In the **IP Address** field, type your IP address.
 - In the **Subnet Mask** field, type your subnet mask.
 - In the **Router** field, type the IP address of your device.

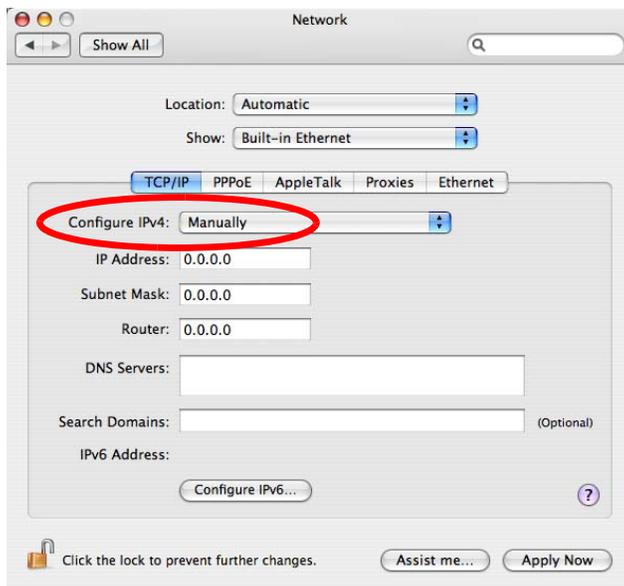

- 6 Click **Apply Now** and close the window.

Verifying Settings


Check your TCP/IP properties by clicking **Applications > Utilities > Network Utilities**, and then selecting the appropriate **Network Interface** from the **Info** tab.

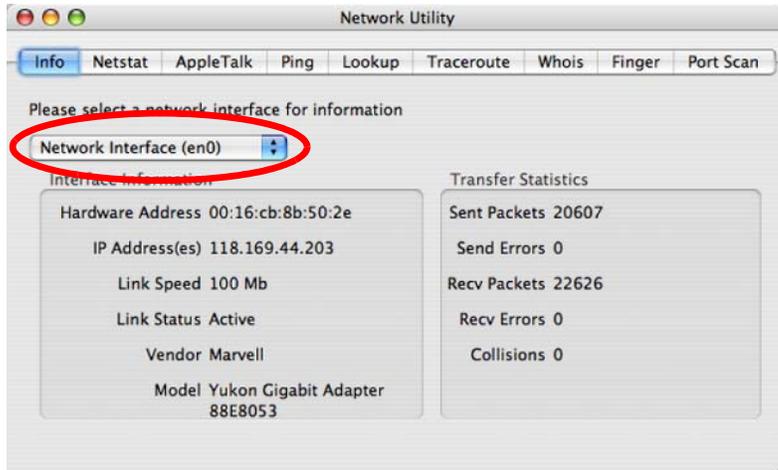Figure 100 Mac OS X 10.4: Network Utility

Mac OS X: 10.5 and 10.6

The screens in this section are from Mac OS X 10.5 but can also apply to 10.6.


- 1 Click **Apple > System Preferences**.

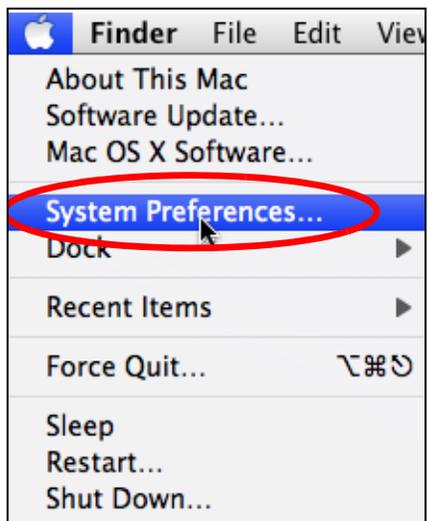

- 2 In **System Preferences**, click the **Network** icon.




- 3 When the **Network** preferences pane opens, select **Ethernet** from the list of available connection types.

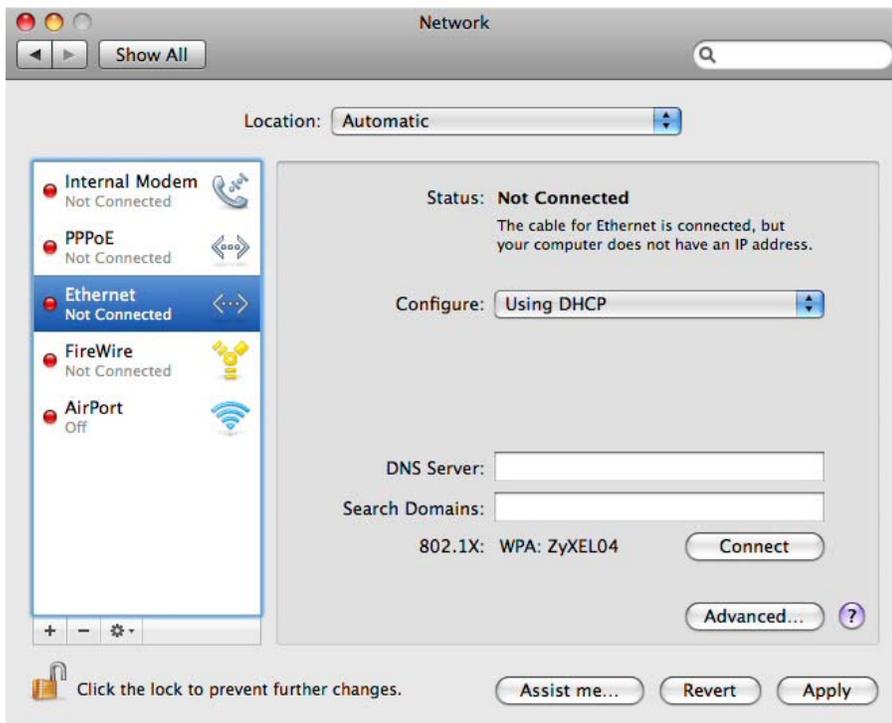

- 4 From the **Configure** list, select **Using DHCP** for dynamically assigned settings.
- 5 For statically assigned settings, do the following:
 - From the **Configure** list, select **Manually**.


- In the **IP Address** field, enter your IP address.
- In the **Subnet Mask** field, enter your subnet mask.
- In the **Router** field, enter the IP address of your WAP3205 v2.

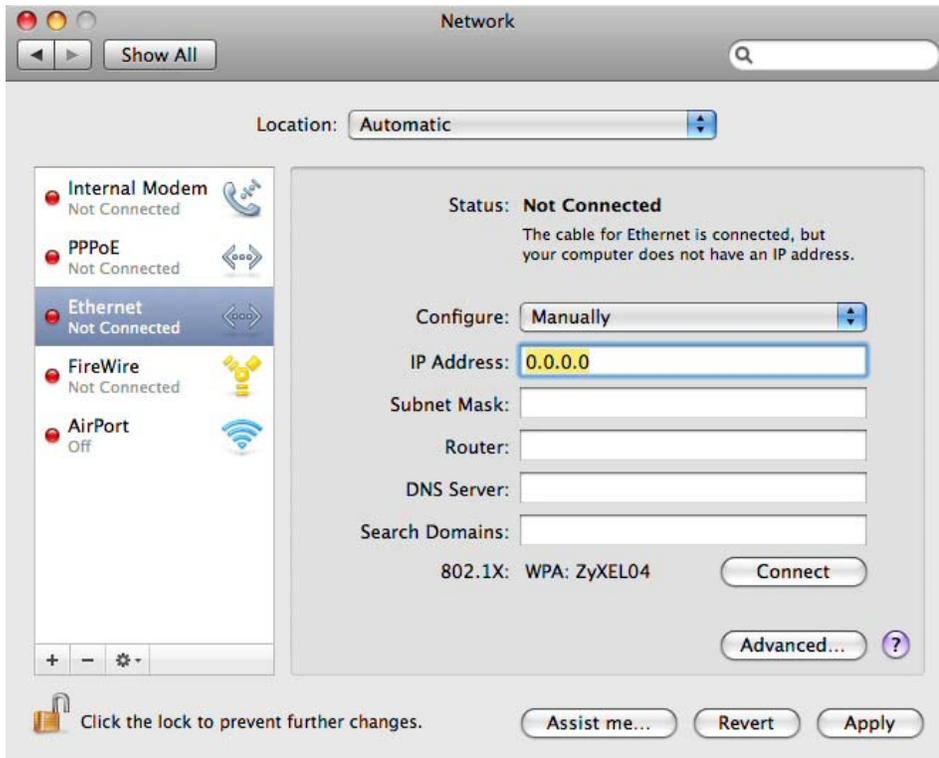

- 6 Click **Apply** and close the window.

Verifying Settings

Check your TCP/IP properties by clicking **Applications > Utilities > Network Utilities**, and then selecting the appropriate **Network interface** from the **Info** tab.

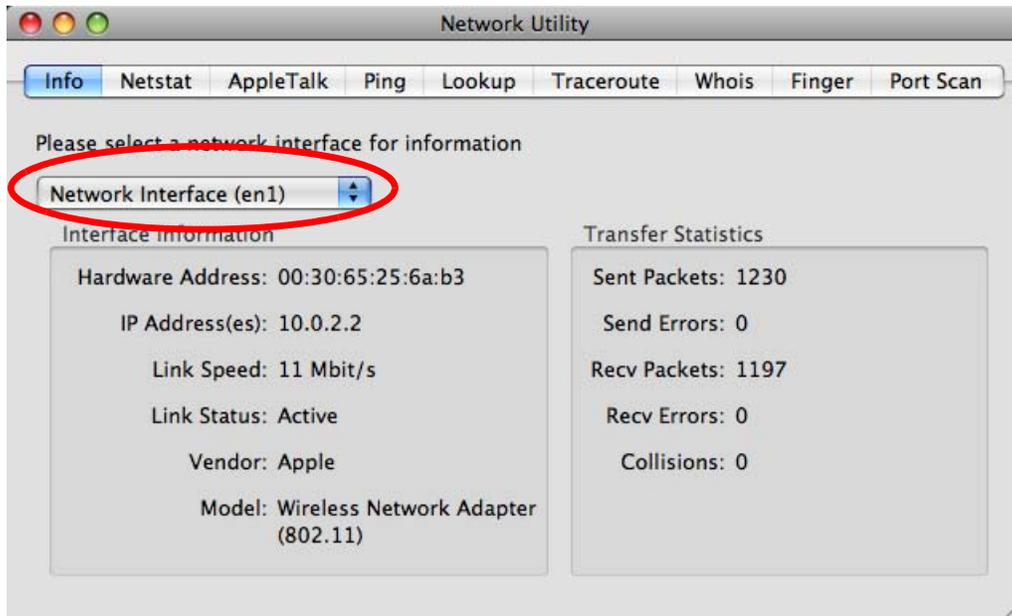Figure 101 Mac OS X 10.5: Network Utility

Linux: Ubuntu 8 (GNOME)

This section shows you how to configure your computer's TCP/IP settings in the GNU Object Model Environment (GNOME) using the Ubuntu 8 Linux distribution. The procedure, screens and file locations may vary depending on your specific distribution, release version, and individual configuration. The following screens use the default Ubuntu 8 installation.


Note: Make sure you are logged in as the root administrator.

Follow the steps below to configure your computer IP address in GNOME:

- 1 Click **System > Administration > Network**.



- 2 When the **Network Settings** window opens, click **Unlock** to open the **Authenticate** window. (By default, the **Unlock** button is greyed out until clicked.) You cannot make changes to your configuration unless you first enter your admin password.

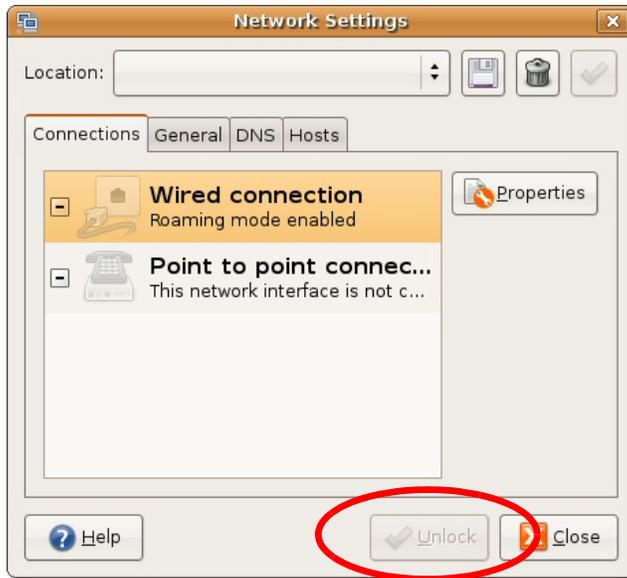


- 3 In the **Authenticate** window, enter your admin account name and password then click the **Authenticate** button.



- 4 In the **Network Settings** window, select the connection that you want to configure, then click **Properties**.



- 5 The **Properties** dialog box opens.

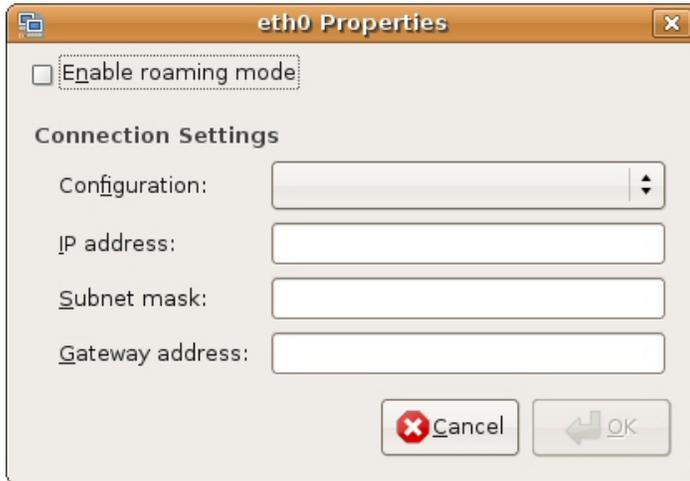


- In the **Configuration** list, select **Automatic Configuration (DHCP)** if you have a dynamic IP address.
 - In the **Configuration** list, select **Static IP address** if you have a static IP address. Fill in the **IP address**, **Subnet mask**, and **Gateway address** fields.
- 6 Click **OK** to save the changes and close the **Properties** dialog box and return to the **Network Settings** screen.
 - 7 If you know your DNS server IP address(es), click the **DNS** tab in the **Network Settings** window and then enter the DNS server information in the fields provided.



- 8 Click the **Close** button to apply the changes.

Verifying Settings

Check your TCP/IP properties by clicking **System > Administration > Network Tools**, and then selecting the appropriate **Network device** from the **Devices** tab. The **Interface Statistics** column shows data if your connection is working properly.

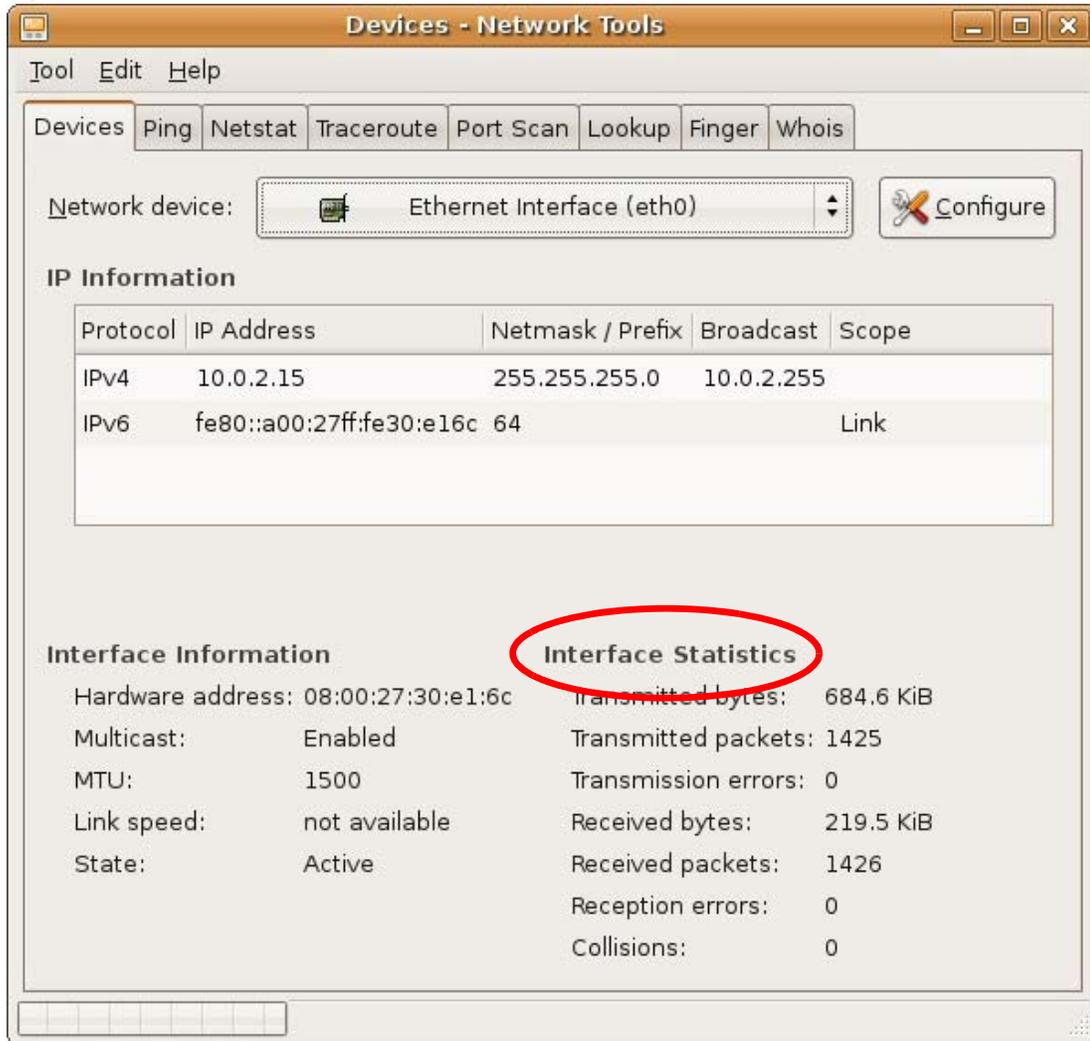Figure 102 Ubuntu 8: Network Tools


Linux: openSUSE 10.3 (KDE)

This section shows you how to configure your computer's TCP/IP settings in the K Desktop Environment (KDE) using the openSUSE 10.3 Linux distribution. The procedure, screens and file locations may vary depending on your specific distribution, release version, and individual configuration. The following screens use the default openSUSE 10.3 installation.

Note: Make sure you are logged in as the root administrator.

Follow the steps below to configure your computer IP address in the KDE:


- 1 Click **K Menu > Computer > Administrator Settings (YaST)**.

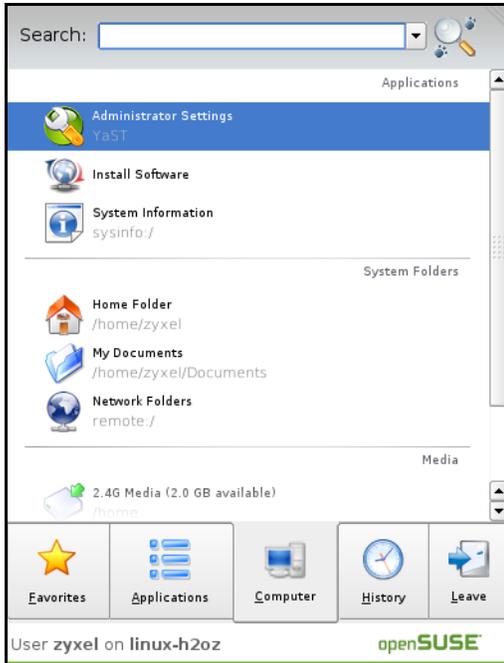


- 2 When the **Run as Root - KDE su** dialog opens, enter the admin password and click **OK**.



- 3 When the **YaST Control Center** window opens, select **Network Devices** and then click the **Network Card** icon.

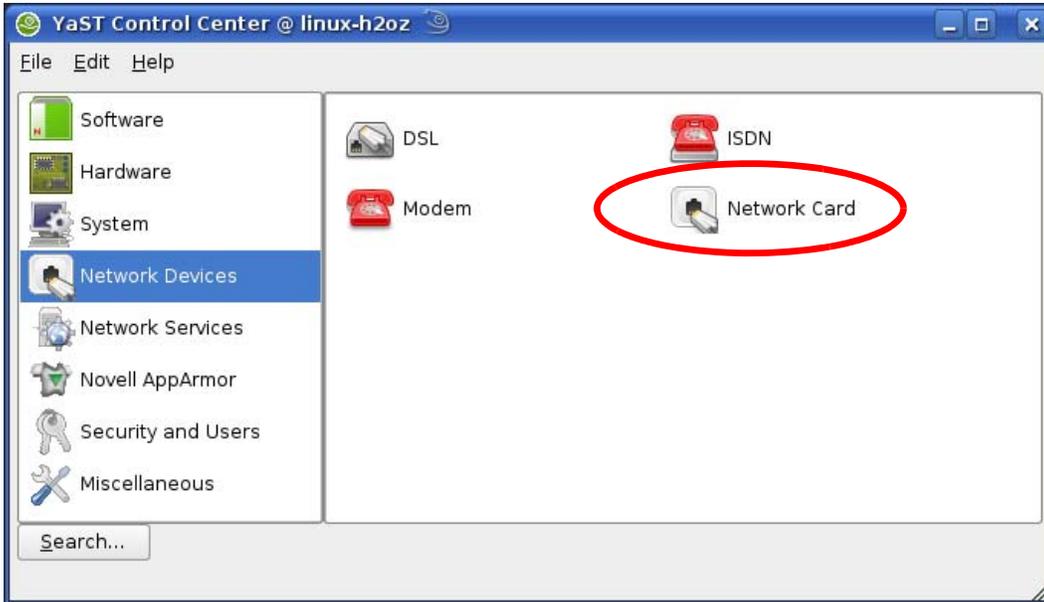


- 4 When the **Network Settings** window opens, click the **Overview** tab, select the appropriate connection **Name** from the list, and then click the **Configure** button.

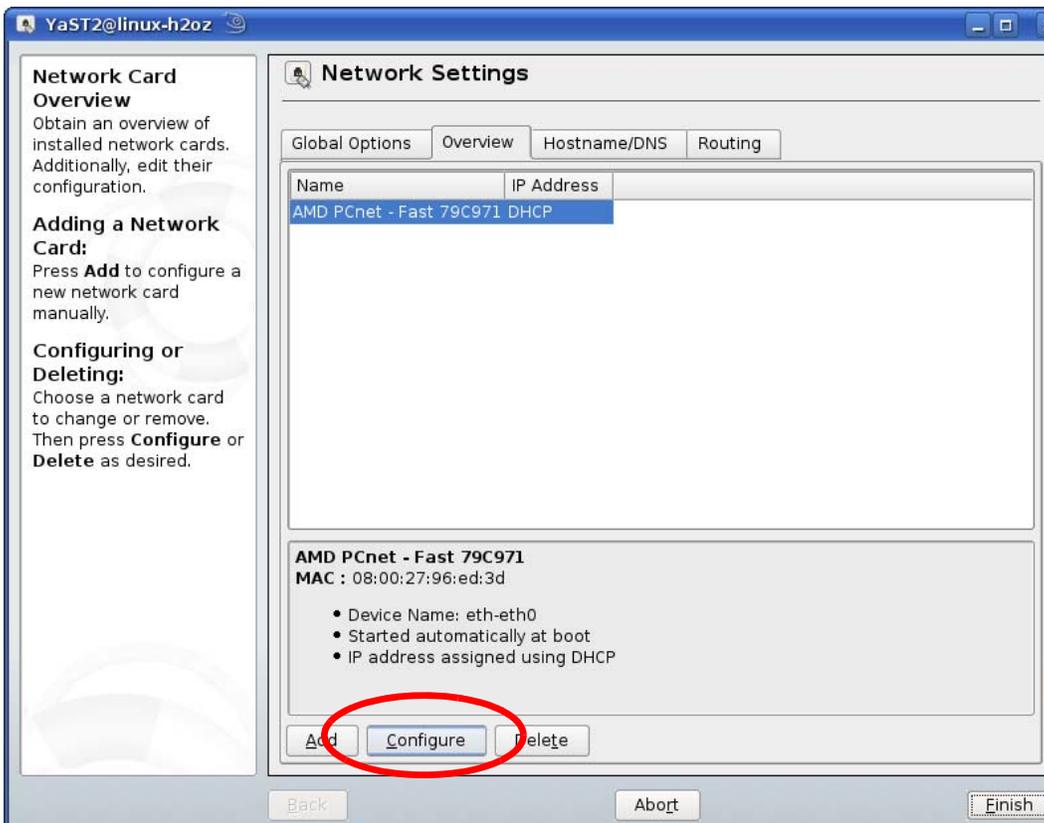


- 5 When the **Network Card Setup** window opens, click the **Address** tab

Figure 103 openSUSE 10.3: Network Card Setup

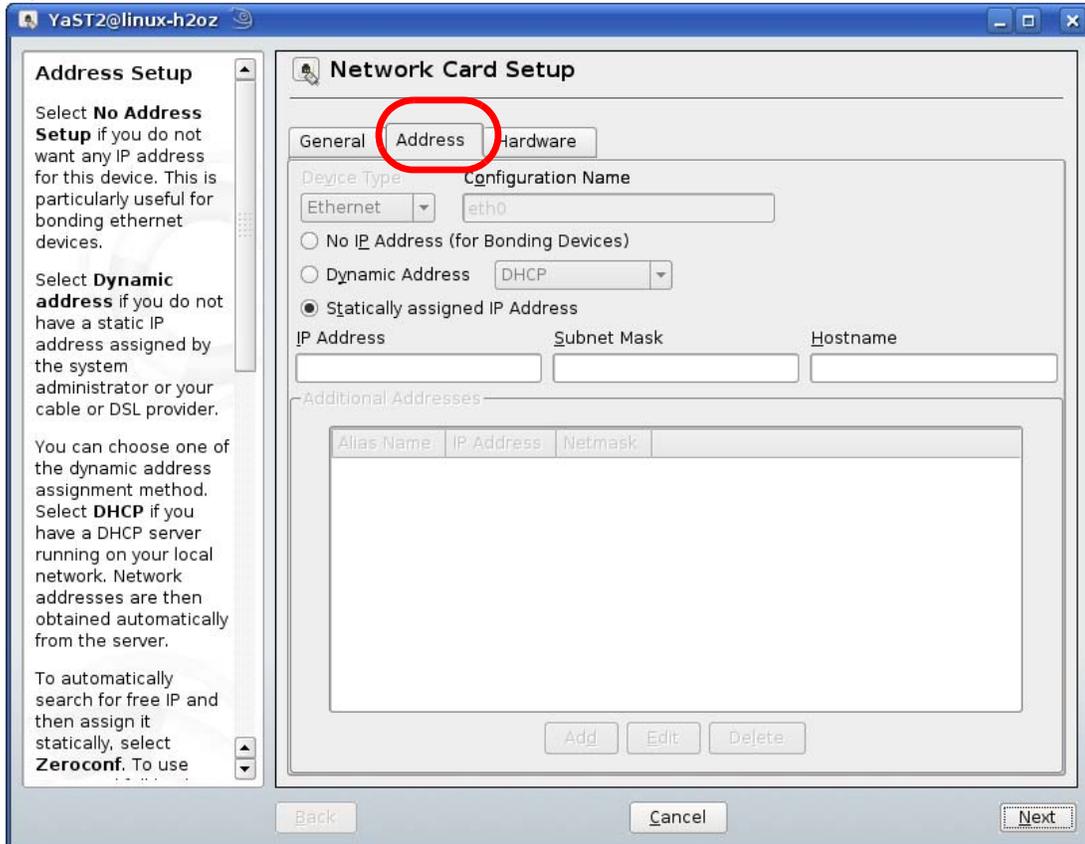

- 6 Select **Dynamic Address (DHCP)** if you have a dynamic IP address.
Select **Statically assigned IP Address** if you have a static IP address. Fill in the **IP address**, **Subnet mask**, and **Hostname** fields.
- 7 Click **Next** to save the changes and close the **Network Card Setup** window.
- 8 If you know your DNS server IP address(es), click the **Hostname/DNS** tab in **Network Settings** and then enter the DNS server information in the fields provided.

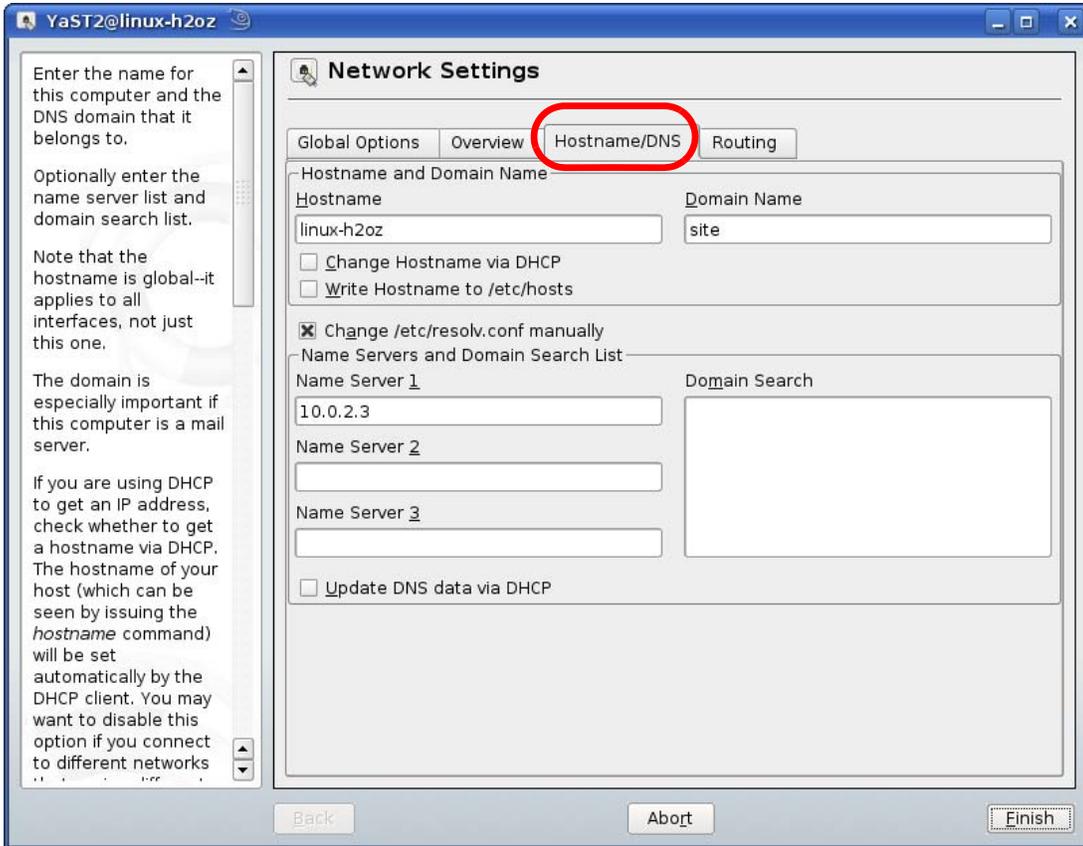


- 9 Click **Finish** to save your settings and close the window.

Verifying Settings


Click the **KNetwork Manager** icon on the **Task bar** to check your TCP/IP properties. From the **Options** sub-menu, select **Show Connection Information**.

Figure 104 openSUSE 10.3: KNetwork Manager

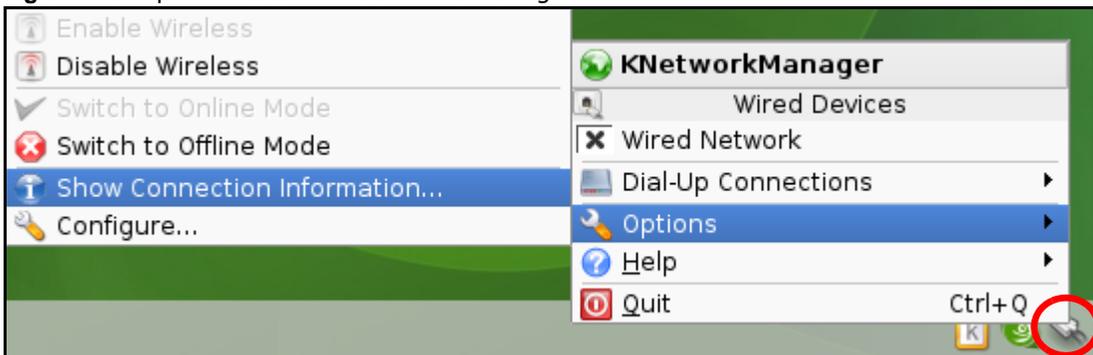

When the **Connection Status - KNetwork Manager** window opens, click the **Statistics** tab to see if your connection is working properly.

Figure 105 openSUSE: Connection Status - KNetwork Manager

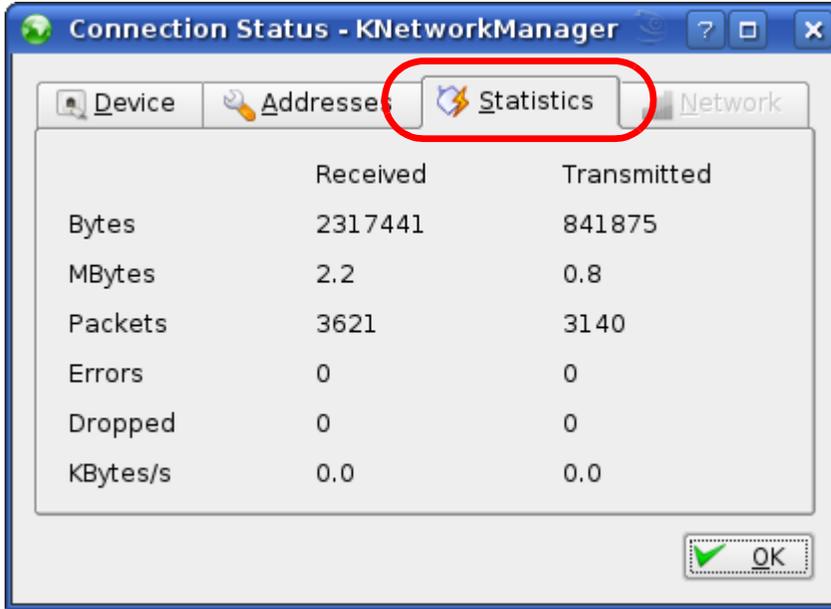

Wireless LANs


Wireless LAN Topologies

This section discusses ad-hoc and infrastructure wireless LAN topologies.

Ad-hoc Wireless LAN Configuration

The simplest WLAN configuration is an independent (Ad-hoc) WLAN that connects a set of computers with wireless adapters (A, B, C). Any time two or more wireless adapters are within range of each other, they can set up an independent network, which is commonly referred to as an ad-hoc network or Independent Basic Service Set (IBSS). The following diagram shows an example of notebook computers using wireless adapters to form an ad-hoc wireless LAN.


Figure 106 Peer-to-Peer Communication in an Ad-hoc Network

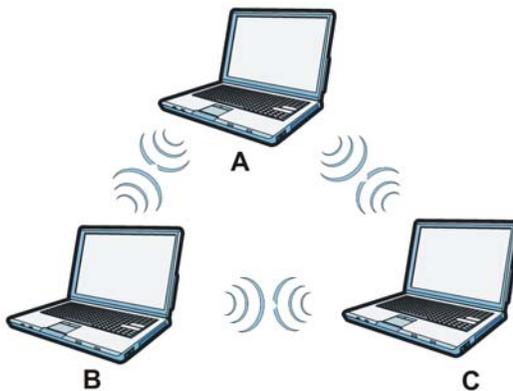

BSS

A Basic Service Set (BSS) exists when all communications between wireless clients or between a wireless client and a wired network client go through one access point (AP).

Intra-BSS traffic is traffic between wireless clients in the BSS. When Intra-BSS is enabled, wireless client **A** and **B** can access the wired network and communicate with each other. When Intra-BSS is disabled, wireless client **A** and **B** can still access the wired network but cannot communicate with each other.

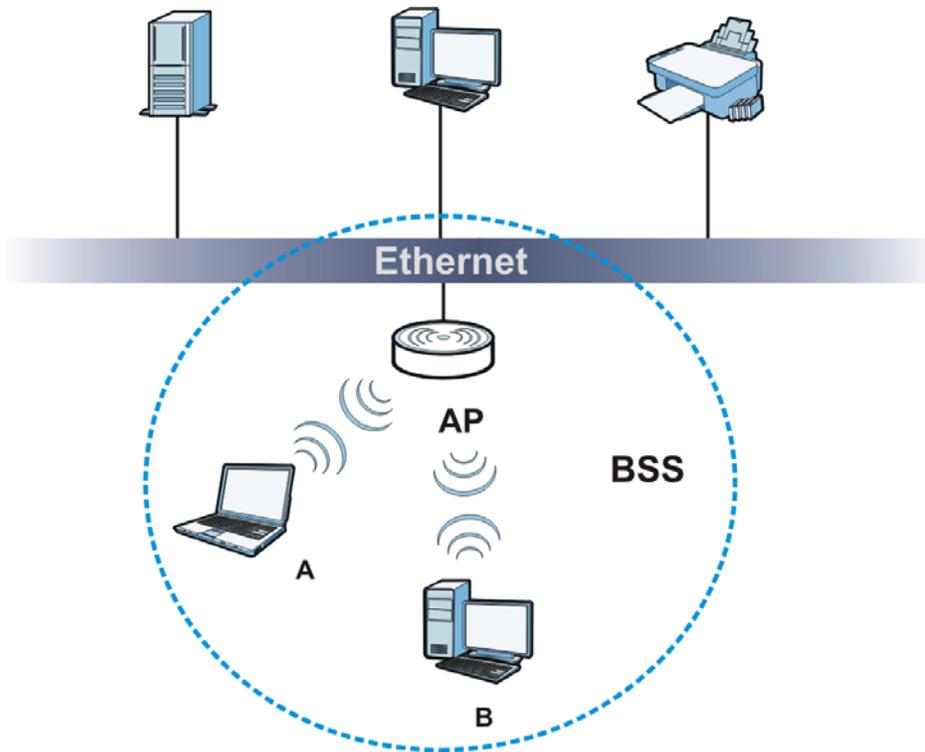
Figure 107 Basic Service Set

ESS

An Extended Service Set (ESS) consists of a series of overlapping BSSs, each containing an access point, with each access point connected together by a wired network. This wired connection between APs is called a Distribution System (DS).

This type of wireless LAN topology is called an Infrastructure WLAN. The Access Points not only provide communication with the wired network but also mediate wireless network traffic in the immediate neighborhood.

An ESSID (ESS IDentification) uniquely identifies each ESS. All access points and their associated wireless clients within the same ESS must have the same ESSID in order to communicate.

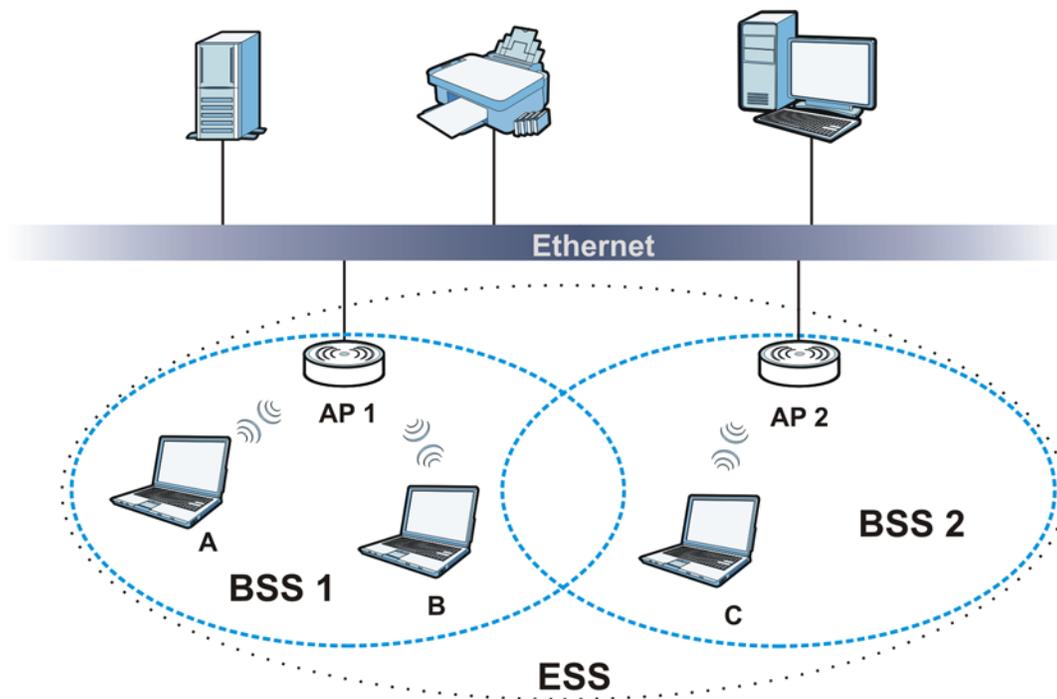Figure 108 Infrastructure WLAN

Channel


A channel is the radio frequency(ies) used by wireless devices to transmit and receive data. Channels available depend on your geographical area. You may have a choice of channels (for your region) so you should use a channel different from an adjacent AP (access point) to reduce interference. Interference occurs when radio signals from different access points overlap causing interference and degrading performance.

Adjacent channels partially overlap however. To avoid interference due to overlap, your AP should be on a channel at least five channels away from a channel that an adjacent AP is using. For example, if your region has 11 channels and an adjacent AP is using channel 1, then you need to select a channel between 6 or 11.

RTS/CTS

A hidden node occurs when two stations are within range of the same access point, but are not within range of each other. The following figure illustrates a hidden node. Both stations (STA) are within range of the access point (AP) or wireless gateway, but out-of-range of each other, so they cannot "hear" each other, that is they do not know if the channel is currently being used. Therefore, they are considered hidden from each other.

Figure 109 RTS/CTS

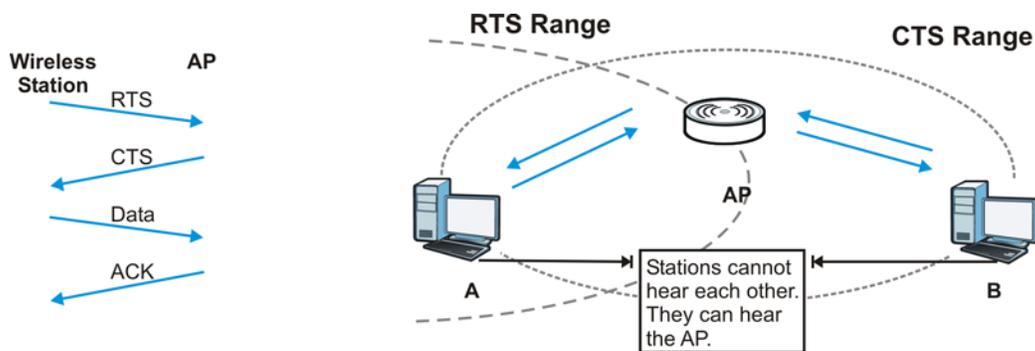

When station **A** sends data to the AP, it might not know that the station **B** is already using the channel. If these two stations send data at the same time, collisions may occur when both sets of data arrive at the AP at the same time, resulting in a loss of messages for both stations.

RTS/CTS is designed to prevent collisions due to hidden nodes. An **RTS/CTS** defines the biggest size data frame you can send before an RTS (Request To Send)/CTS (Clear to Send) handshake is invoked.

When a data frame exceeds the **RTS/CTS** value you set (between 0 to 2432 bytes), the station that wants to transmit this frame must first send an RTS (Request To Send) message to the AP for permission to send it. The AP then responds with a CTS (Clear to Send) message to all other stations within its range to notify them to defer their transmission. It also reserves and confirms with the requesting station the time frame for the requested transmission.

Stations can send frames smaller than the specified **RTS/CTS** directly to the AP without the RTS (Request To Send)/CTS (Clear to Send) handshake.

You should only configure **RTS/CTS** if the possibility of hidden nodes exists on your network and the "cost" of resending large frames is more than the extra network overhead involved in the RTS (Request To Send)/CTS (Clear to Send) handshake.

If the **RTS/CTS** value is greater than the **Fragmentation Threshold** value (see next), then the RTS (Request To Send)/CTS (Clear to Send) handshake will never occur as data frames will be fragmented before they reach **RTS/CTS** size.

Note: Enabling the RTS Threshold causes redundant network overhead that could negatively affect the throughput performance instead of providing a remedy.

Fragmentation Threshold

A **Fragmentation Threshold** is the maximum data fragment size (between 256 and 2432 bytes) that can be sent in the wireless network before the AP will fragment the packet into smaller data frames.

A large **Fragmentation Threshold** is recommended for networks not prone to interference while you should set a smaller threshold for busy networks or networks that are prone to interference.

If the **Fragmentation Threshold** value is smaller than the **RTS/CTS** value (see previously) you set then the RTS (Request To Send)/CTS (Clear to Send) handshake will never occur as data frames will be fragmented before they reach **RTS/CTS** size.

Preamble Type

Preamble is used to signal that data is coming to the receiver. Short and long refer to the length of the synchronization field in a packet.

Short preamble increases performance as less time sending preamble means more time for sending data. All IEEE 802.11 compliant wireless adapters support long preamble, but not all support short preamble.

Use long preamble if you are unsure what preamble mode other wireless devices on the network support, and to provide more reliable communications in busy wireless networks.

Use short preamble if you are sure all wireless devices on the network support it, and to provide more efficient communications.

Use the dynamic setting to automatically use short preamble when all wireless devices on the network support it, otherwise the WAP3205 v2 uses long preamble.

Note: The wireless devices **MUST** use the same preamble mode in order to communicate.

IEEE 802.11g Wireless LAN

IEEE 802.11g is fully compatible with the IEEE 802.11b standard. This means an IEEE 802.11b adapter can interface directly with an IEEE 802.11g access point (and vice versa) at 11 Mbps or lower depending on range. IEEE 802.11g has several intermediate rate steps between the maximum and minimum data rates. The IEEE 802.11g data rate and modulation are as follows:

Table 62 IEEE 802.11g

DATA RATE (MBPS)	MODULATION
1	DBPSK (Differential Binary Phase Shift Keyed)
2	DQPSK (Differential Quadrature Phase Shift Keying)
5.5 / 11	CCK (Complementary Code Keying)
6/9/12/18/24/36/48/54	OFDM (Orthogonal Frequency Division Multiplexing)

Wireless Security Overview

Wireless security is vital to your network to protect wireless communication between wireless clients, access points and the wired network.

Wireless security methods available on the WAP3205 v2 are data encryption, wireless client authentication, restricting access by device MAC address and hiding the WAP3205 v2 identity.

The following figure shows the relative effectiveness of these wireless security methods available on your WAP3205 v2.

Table 63 Wireless Security Levels

SECURITY LEVEL	SECURITY TYPE
Least Secure	Unique SSID (Default)
	Unique SSID with Hide SSID Enabled
	MAC Address Filtering
	WEP Encryption
	IEEE802.1x EAP with RADIUS Server Authentication
	Wi-Fi Protected Access (WPA)
Most Secure	WPA2

Note: You must enable the same wireless security settings on the WAP3205 v2 and on all wireless clients that you want to associate with it.

IEEE 802.1x

In June 2001, the IEEE 802.1x standard was designed to extend the features of IEEE 802.11 to support extended authentication as well as providing additional accounting and control features. It is supported by Windows XP and a number of network devices. Some advantages of IEEE 802.1x are:

- User based identification that allows for roaming.
- Support for RADIUS (Remote Authentication Dial In User Service, RFC 2138, 2139) for centralized user profile and accounting management on a network RADIUS server.
- Support for EAP (Extensible Authentication Protocol, RFC 2486) that allows additional authentication methods to be deployed with no changes to the access point or the wireless clients.

RADIUS

RADIUS is based on a client-server model that supports authentication, authorization and accounting. The access point is the client and the server is the RADIUS server. The RADIUS server handles the following tasks:

- Authentication
Determines the identity of the users.
- Authorization
Determines the network services available to authenticated users once they are connected to the network.
- Accounting
Keeps track of the client's network activity.

RADIUS is a simple package exchange in which your AP acts as a message relay between the wireless client and the network RADIUS server.

Types of RADIUS Messages

The following types of RADIUS messages are exchanged between the access point and the RADIUS server for user authentication:

- Access-Request
Sent by an access point requesting authentication.
- Access-Reject
Sent by a RADIUS server rejecting access.
- Access-Accept
Sent by a RADIUS server allowing access.
- Access-Challenge
Sent by a RADIUS server requesting more information in order to allow access. The access point sends a proper response from the user and then sends another Access-Request message.

The following types of RADIUS messages are exchanged between the access point and the RADIUS server for user accounting:

- Accounting-Request
Sent by the access point requesting accounting.
- Accounting-Response
Sent by the RADIUS server to indicate that it has started or stopped accounting.

In order to ensure network security, the access point and the RADIUS server use a shared secret key, which is a password, they both know. The key is not sent over the network. In addition to the shared key, password information exchanged is also encrypted to protect the network from unauthorized access.

Types of EAP Authentication

This section discusses some popular authentication types: EAP-MD5, EAP-TLS, EAP-TTLS, PEAP and LEAP. Your wireless LAN device may not support all authentication types.

EAP (Extensible Authentication Protocol) is an authentication protocol that runs on top of the IEEE 802.1x transport mechanism in order to support multiple types of user authentication. By using EAP to interact with an EAP-compatible RADIUS server, an access point helps a wireless station and a RADIUS server perform authentication.

The type of authentication you use depends on the RADIUS server and an intermediary AP(s) that supports IEEE 802.1x. .

For EAP-TLS authentication type, you must first have a wired connection to the network and obtain the certificate(s) from a certificate authority (CA). A certificate (also called digital IDs) can be used to authenticate users and a CA issues certificates and guarantees the identity of each certificate owner.

EAP-MD5 (Message-Digest Algorithm 5)

MD5 authentication is the simplest one-way authentication method. The authentication server sends a challenge to the wireless client. The wireless client 'proves' that it knows the password by

encrypting the password with the challenge and sends back the information. Password is not sent in plain text.

However, MD5 authentication has some weaknesses. Since the authentication server needs to get the plaintext passwords, the passwords must be stored. Thus someone other than the authentication server may access the password file. In addition, it is possible to impersonate an authentication server as MD5 authentication method does not perform mutual authentication. Finally, MD5 authentication method does not support data encryption with dynamic session key. You must configure WEP encryption keys for data encryption.

EAP-TLS (Transport Layer Security)

With EAP-TLS, digital certifications are needed by both the server and the wireless clients for mutual authentication. The server presents a certificate to the client. After validating the identity of the server, the client sends a different certificate to the server. The exchange of certificates is done in the open before a secured tunnel is created. This makes user identity vulnerable to passive attacks. A digital certificate is an electronic ID card that authenticates the sender's identity. However, to implement EAP-TLS, you need a Certificate Authority (CA) to handle certificates, which imposes a management overhead.

EAP-TTLS (Tunneled Transport Layer Service)

EAP-TTLS is an extension of the EAP-TLS authentication that uses certificates for only the server-side authentications to establish a secure connection. Client authentication is then done by sending username and password through the secure connection, thus client identity is protected. For client authentication, EAP-TTLS supports EAP methods and legacy authentication methods such as PAP, CHAP, MS-CHAP and MS-CHAP v2.

PEAP (Protected EAP)

Like EAP-TTLS, server-side certificate authentication is used to establish a secure connection, then use simple username and password methods through the secured connection to authenticate the clients, thus hiding client identity. However, PEAP only supports EAP methods, such as EAP-MD5, EAP-MSCHAPv2 and EAP-GTC (EAP-Generic Token Card), for client authentication. EAP-GTC is implemented only by Cisco.

LEAP

LEAP (Lightweight Extensible Authentication Protocol) is a Cisco implementation of IEEE 802.1x.

Dynamic WEP Key Exchange

The AP maps a unique key that is generated with the RADIUS server. This key expires when the wireless connection times out, disconnects or reauthentication times out. A new WEP key is generated each time reauthentication is performed.

If this feature is enabled, it is not necessary to configure a default encryption key in the wireless security configuration screen. You may still configure and store keys, but they will not be used while dynamic WEP is enabled.

Note: EAP-MD5 cannot be used with Dynamic WEP Key Exchange

For added security, certificate-based authentications (EAP-TLS, EAP-TTLS and PEAP) use dynamic keys for data encryption. They are often deployed in corporate environments, but for public deployment, a simple user name and password pair is more practical. The following table is a comparison of the features of authentication types.

Table 64 Comparison of EAP Authentication Types

	EAP-MD5	EAP-TLS	EAP-TTLS	PEAP	LEAP
Mutual Authentication	No	Yes	Yes	Yes	Yes
Certificate – Client	No	Yes	Optional	Optional	No
Certificate – Server	No	Yes	Yes	Yes	No
Dynamic Key Exchange	No	Yes	Yes	Yes	Yes
Credential Integrity	None	Strong	Strong	Strong	Moderate
Deployment Difficulty	Easy	Hard	Moderate	Moderate	Moderate
Client Identity Protection	No	No	Yes	Yes	No

WPA and WPA2

Wi-Fi Protected Access (WPA) is a subset of the IEEE 802.11i standard. WPA2 (IEEE 802.11i) is a wireless security standard that defines stronger encryption, authentication and key management than WPA.

Key differences between WPA or WPA2 and WEP are improved data encryption and user authentication.

If both an AP and the wireless clients support WPA2 and you have an external RADIUS server, use WPA2 for stronger data encryption. If you don't have an external RADIUS server, you should use WPA2-PSK (WPA2-Pre-Shared Key) that only requires a single (identical) password entered into each access point, wireless gateway and wireless client. As long as the passwords match, a wireless client will be granted access to a WLAN.

If the AP or the wireless clients do not support WPA2, just use WPA or WPA-PSK depending on whether you have an external RADIUS server or not.

Select WEP only when the AP and/or wireless clients do not support WPA or WPA2. WEP is less secure than WPA or WPA2.

Encryption

WPA improves data encryption by using Temporal Key Integrity Protocol (TKIP), Message Integrity Check (MIC) and IEEE 802.1x. WPA2 also uses TKIP when required for compatibility reasons, but offers stronger encryption than TKIP with Advanced Encryption Standard (AES) in the Counter mode with Cipher block chaining Message authentication code Protocol (CCMP).

TKIP uses 128-bit keys that are dynamically generated and distributed by the authentication server. AES (Advanced Encryption Standard) is a block cipher that uses a 256-bit mathematical algorithm called Rijndael. They both include a per-packet key mixing function, a Message Integrity Check (MIC) named Michael, an extended initialization vector (IV) with sequencing rules, and a re-keying mechanism.

WPA and WPA2 regularly change and rotate the encryption keys so that the same encryption key is never used twice.

The RADIUS server distributes a Pairwise Master Key (PMK) key to the AP that then sets up a key hierarchy and management system, using the PMK to dynamically generate unique data encryption keys to encrypt every data packet that is wirelessly communicated between the AP and the wireless clients. This all happens in the background automatically.

The Message Integrity Check (MIC) is designed to prevent an attacker from capturing data packets, altering them and resending them. The MIC provides a strong mathematical function in which the receiver and the transmitter each compute and then compare the MIC. If they do not match, it is assumed that the data has been tampered with and the packet is dropped.

By generating unique data encryption keys for every data packet and by creating an integrity checking mechanism (MIC), with TKIP and AES it is more difficult to decrypt data on a Wi-Fi network than WEP and difficult for an intruder to break into the network.

The encryption mechanisms used for WPA(2) and WPA(2)-PSK are the same. The only difference between the two is that WPA(2)-PSK uses a simple common password, instead of user-specific credentials. The common-password approach makes WPA(2)-PSK susceptible to brute-force password-guessing attacks but it's still an improvement over WEP as it employs a consistent, single, alphanumeric password to derive a PMK which is used to generate unique temporal encryption keys. This prevents all wireless devices sharing the same encryption keys. (a weakness of WEP)

User Authentication

WPA and WPA2 apply IEEE 802.1x and Extensible Authentication Protocol (EAP) to authenticate wireless clients using an external RADIUS database. WPA2 reduces the number of key exchange messages from six to four (CCMP 4-way handshake) and shortens the time required to connect to a network. Other WPA2 authentication features that are different from WPA include key caching and pre-authentication. These two features are optional and may not be supported in all wireless devices.

Key caching allows a wireless client to store the PMK it derived through a successful authentication with an AP. The wireless client uses the PMK when it tries to connect to the same AP and does not need to go through the authentication process again.

Pre-authentication enables fast roaming by allowing the wireless client (already connecting to an AP) to perform IEEE 802.1x authentication with another AP before connecting to it.

Wireless Client WPA Supplicants

A wireless client supplicant is the software that runs on an operating system instructing the wireless client how to use WPA. At the time of writing, the most widely available supplicant is the WPA patch for Windows XP, Funk Software's Odyssey client.


The Windows XP patch is a free download that adds WPA capability to Windows XP's built-in "Zero Configuration" wireless client. However, you must run Windows XP to use it.

WPA(2) with RADIUS Application Example

To set up WPA(2), you need the IP address of the RADIUS server, its port number (default is 1812), and the RADIUS shared secret. A WPA(2) application example with an external RADIUS server looks as follows. "A" is the RADIUS server. "DS" is the distribution system.

- 1 The AP passes the wireless client's authentication request to the RADIUS server.
- 2 The RADIUS server then checks the user's identification against its database and grants or denies network access accordingly.
- 3 A 256-bit Pairwise Master Key (PMK) is derived from the authentication process by the RADIUS server and the client.
- 4 The RADIUS server distributes the PMK to the AP. The AP then sets up a key hierarchy and management system, using the PMK to dynamically generate unique data encryption keys. The keys are used to encrypt every data packet that is wirelessly communicated between the AP and the wireless clients.

Figure 110 WPA(2) with RADIUS Application Example

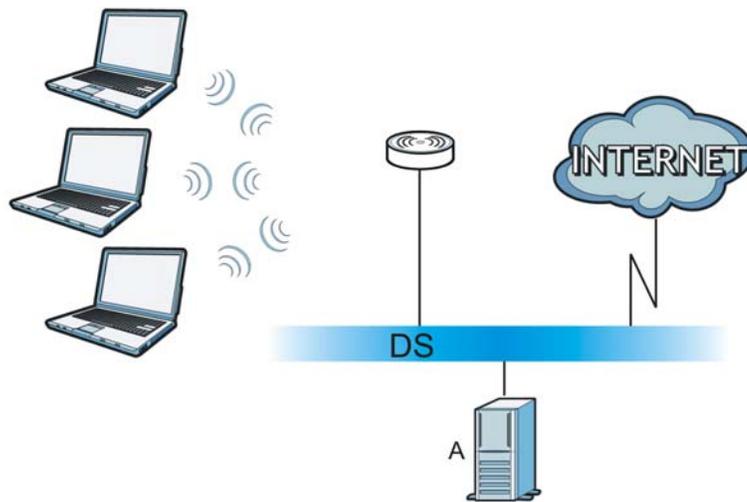


WPA(2)-PSK Application Example

A WPA(2)-PSK application looks as follows.

- 1 First enter identical passwords into the AP and all wireless clients. The Pre-Shared Key (PSK) must consist of between 8 and 63 ASCII characters or 64 hexadecimal characters (including spaces and symbols).
- 2 The AP checks each wireless client's password and allows it to join the network only if the password matches.
- 3 The AP and wireless clients generate a common PMK (Pairwise Master Key). The key itself is not sent over the network, but is derived from the PSK and the SSID.
- 4 The AP and wireless clients use the TKIP or AES encryption process, the PMK and information exchanged in a handshake to create temporal encryption keys. They use these keys to encrypt data exchanged between them.

Figure 111 WPA(2)-PSK Authentication

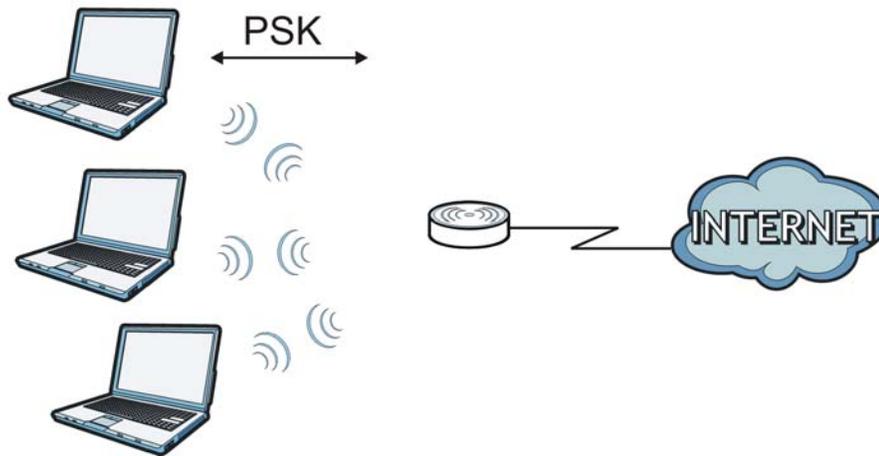

Security Parameters Summary

Refer to this table to see what other security parameters you should configure for each authentication method or key management protocol type. MAC address filters are not dependent on how you configure these security features.

Table 65 Wireless Security Relational Matrix

AUTHENTICATION METHOD/ KEY MANAGEMENT PROTOCOL	ENCRYPTION METHOD	ENTER MANUAL KEY	IEEE 802.1X
Open	None	No	Disable
			Enable without Dynamic WEP Key
Open	WEP	No	Enable with Dynamic WEP Key
		Yes	Enable without Dynamic WEP Key
		Yes	Disable
Shared	WEP	No	Enable with Dynamic WEP Key
		Yes	Enable without Dynamic WEP Key
		Yes	Disable
WPA	TKIP/AES	No	Enable
WPA-PSK	TKIP/AES	Yes	Disable
WPA2	TKIP/AES	No	Enable
WPA2-PSK	TKIP/AES	Yes	Disable

Antenna Overview

An antenna couples RF signals onto air. A transmitter within a wireless device sends an RF signal to the antenna, which propagates the signal through the air. The antenna also operates in reverse by capturing RF signals from the air.

Positioning the antennas properly increases the range and coverage area of a wireless LAN.

Antenna Characteristics

Frequency

An antenna in the frequency of 2.4GHz or 5GHz is needed to communicate efficiently in a wireless LAN

Radiation Pattern

A radiation pattern is a diagram that allows you to visualize the shape of the antenna's coverage area.

Antenna Gain

Antenna gain, measured in dB (decibel), is the increase in coverage within the RF beam width. Higher antenna gain improves the range of the signal for better communications.

For an indoor site, each 1 dB increase in antenna gain results in a range increase of approximately 2.5%. For an unobstructed outdoor site, each 1dB increase in gain results in a range increase of approximately 5%. Actual results may vary depending on the network environment.

Antenna gain is sometimes specified in dBi, which is how much the antenna increases the signal power compared to using an isotropic antenna. An isotropic antenna is a theoretical perfect antenna that sends out radio signals equally well in all directions. dBi represents the true gain that the antenna provides.

Types of Antennas for WLAN

There are two types of antennas used for wireless LAN applications.

- Omni-directional antennas send the RF signal out in all directions on a horizontal plane. The coverage area is torus-shaped (like a donut) which makes these antennas ideal for a room environment. With a wide coverage area, it is possible to make circular overlapping coverage areas with multiple access points.
- Directional antennas concentrate the RF signal in a beam, like a flashlight does with the light from its bulb. The angle of the beam determines the width of the coverage pattern. Angles typically range from 20 degrees (very directional) to 120 degrees (less directional). Directional antennas are ideal for hallways and outdoor point-to-point applications.

Positioning Antennas

In general, antennas should be mounted as high as practically possible and free of obstructions. In point-to-point application, position both antennas at the same height and in a direct line of sight to each other to attain the best performance.

For omni-directional antennas mounted on a table, desk, and so on, point the antenna up. For omni-directional antennas mounted on a wall or ceiling, point the antenna down. For a single AP application, place omni-directional antennas as close to the center of the coverage area as possible.

For directional antennas, point the antenna in the direction of the desired coverage area.

Common Services

The following table lists some commonly-used services and their associated protocols and port numbers. For a comprehensive list of port numbers, ICMP type/code numbers and services, visit the IANA (Internet Assigned Number Authority) web site.

- **Name:** This is a short, descriptive name for the service. You can use this one or create a different one, if you like.
- **Protocol:** This is the type of IP protocol used by the service. If this is **TCP/UDP**, then the service uses the same port number with TCP and UDP. If this is **USER-DEFINED**, the **Port(s)** is the IP protocol number, not the port number.
- **Port(s):** This value depends on the **Protocol**. Please refer to RFC 1700 for further information about port numbers.
 - If the **Protocol** is **TCP, UDP, or TCP/UDP**, this is the IP port number.
 - If the **Protocol** is **USER**, this is the IP protocol number.
- **Description:** This is a brief explanation of the applications that use this service or the situations in which this service is used.

Table 66 Commonly Used Services

NAME	PROTOCOL	PORT(S)	DESCRIPTION
AH (IPSEC_TUNNEL)	User-Defined	51	The IPSEC AH (Authentication Header) tunneling protocol uses this service.
AIM/New-ICQ	TCP	5190	AOL's Internet Messenger service. It is also used as a listening port by ICQ.
AUTH	TCP	113	Authentication protocol used by some servers.
BGP	TCP	179	Border Gateway Protocol.
BOOTP_CLIENT	UDP	68	DHCP Client.
BOOTP_SERVER	UDP	67	DHCP Server.
CU-SEEME	TCP UDP	7648 24032	A popular videoconferencing solution from White Pines Software.
DNS	TCP/UDP	53	Domain Name Server, a service that matches web names (for example www.zyxel.com) to IP numbers.
ESP (IPSEC_TUNNEL)	User-Defined	50	The IPSEC ESP (Encapsulation Security Protocol) tunneling protocol uses this service.
FINGER	TCP	79	Finger is a UNIX or Internet related command that can be used to find out if a user is logged on.
FTP	TCP TCP	20 21	File Transfer Program, a program to enable fast transfer of files, including large files that may not be possible by e-mail.
H.323	TCP	1720	NetMeeting uses this protocol.
HTTP	TCP	80	Hyper Text Transfer Protocol - a client/server protocol for the world wide web.

Table 66 Commonly Used Services (continued)

NAME	PROTOCOL	PORT(S)	DESCRIPTION
HTTPS	TCP	443	HTTPS is a secured http session often used in e-commerce.
ICMP	User-Defined	1	Internet Control Message Protocol is often used for diagnostic or routing purposes.
ICQ	UDP	4000	This is a popular Internet chat program.
IGMP (MULTICAST)	User-Defined	2	Internet Group Management Protocol is used when sending packets to a specific group of hosts.
IKE	UDP	500	The Internet Key Exchange algorithm is used for key distribution and management.
IRC	TCP/UDP	6667	This is another popular Internet chat program.
MSN Messenger	TCP	1863	Microsoft Networks' messenger service uses this protocol.
NEW-ICQ	TCP	5190	An Internet chat program.
NEWS	TCP	144	A protocol for news groups.
NFS	UDP	2049	Network File System - NFS is a client/server distributed file service that provides transparent file sharing for network environments.
NNTP	TCP	119	Network News Transport Protocol is the delivery mechanism for the USENET newsgroup service.
PING	User-Defined	1	Packet INternet Groper is a protocol that sends out ICMP echo requests to test whether or not a remote host is reachable.
POP3	TCP	110	Post Office Protocol version 3 lets a client computer get e-mail from a POP3 server through a temporary connection (TCP/IP or other).
PPTP	TCP	1723	Point-to-Point Tunneling Protocol enables secure transfer of data over public networks. This is the control channel.
PPTP_TUNNEL (GRE)	User-Defined	47	PPTP (Point-to-Point Tunneling Protocol) enables secure transfer of data over public networks. This is the data channel.
RCMD	TCP	512	Remote Command Service.
REAL_AUDIO	TCP	7070	A streaming audio service that enables real time sound over the web.
REXEC	TCP	514	Remote Execution Daemon.
RLOGIN	TCP	513	Remote Login.
RTELNET	TCP	107	Remote Telnet.
RTSP	TCP/UDP	554	The Real Time Streaming (media control) Protocol (RTSP) is a remote control for multimedia on the Internet.
SFTP	TCP	115	Simple File Transfer Protocol.
SMTP	TCP	25	Simple Mail Transfer Protocol is the message-exchange standard for the Internet. SMTP enables you to move messages from one e-mail server to another.
SNMP	TCP/UDP	161	Simple Network Management Program.
SNMP-TRAPS	TCP/UDP	162	Traps for use with the SNMP (RFC:1215).

Table 66 Commonly Used Services (continued)

NAME	PROTOCOL	PORT(S)	DESCRIPTION
SQL-NET	TCP	1521	Structured Query Language is an interface to access data on many different types of database systems, including mainframes, midrange systems, UNIX systems and network servers.
SSH	TCP/UDP	22	Secure Shell Remote Login Program.
STRM WORKS	UDP	1558	Stream Works Protocol.
SYSLOG	UDP	514	Syslog allows you to send system logs to a UNIX server.
TACACS	UDP	49	Login Host Protocol used for (Terminal Access Controller Access Control System).
TELNET	TCP	23	Telnet is the login and terminal emulation protocol common on the Internet and in UNIX environments. It operates over TCP/IP networks. Its primary function is to allow users to log into remote host systems.
TFTP	UDP	69	Trivial File Transfer Protocol is an Internet file transfer protocol similar to FTP, but uses the UDP (User Datagram Protocol) rather than TCP (Transmission Control Protocol).
VDOLIVE	TCP	7000	Another videoconferencing solution.

Customer Support

In the event of problems that cannot be solved by using this manual, you should contact your vendor. If you cannot contact your vendor, then contact a ZyXEL office for the region in which you bought the device. Regional websites are listed below.

See also http://www.zyxel.com/about_zyxel/zyxel_worldwide.shtml.

Please have the following information ready when you contact an office.

Required Information

- Product model and serial number.
- Warranty Information.
- Date that you received your device.
- Brief description of the problem and the steps you took to solve it.

Corporate Headquarters (Worldwide)

Taiwan

- ZyXEL Communications Corporation
- <http://www.zyxel.com>

Asia

China

- ZyXEL Communications (Shanghai) Corp.
- ZyXEL Communications (Beijing) Corp.
- ZyXEL Communications (Tianjin) Corp.
- <http://www.zyxel.cn>

India

- ZyXEL Technology India Pvt Ltd
- <http://www.zyxel.in>

Kazakhstan

- ZyXEL Kazakhstan
- <http://www.zyxel.kz>

Korea

- ZyXEL Korea Corp.
- <http://www.zyxel.kr>

Malaysia

- ZyXEL Malaysia Sdn Bhd.
- <http://www.zyxel.com.my>

Pakistan

- ZyXEL Pakistan (Pvt.) Ltd.
- <http://www.zyxel.com.pk>

Philippines

- ZyXEL Philippines
- <http://www.zyxel.com.ph>

Singapore

- ZyXEL Singapore Pte Ltd.
- <http://www.zyxel.com.sg>

Taiwan

- ZyXEL Communications Corporation
- <http://www.zyxel.com/tw/zh/>

Thailand

- ZyXEL Thailand Co., Ltd
- <http://www.zyxel.co.th>

Vietnam

- ZyXEL Communications Corporation-Vietnam Office
- <http://www.zyxel.com/vn/vi>

Europe

Austria

- ZyXEL Deutschland GmbH
- <http://www.zyxel.de>

Belarus

- ZyXEL BY
- <http://www.zyxel.by>

Belgium

- ZyXEL Communications B.V.
- <http://www.zyxel.com/be/nl/>

Bulgaria

- ZyXEL България
- <http://www.zyxel.com/bg/bg/>

Czech Republic

- ZyXEL Communications Czech s.r.o
- <http://www.zyxel.cz>

Denmark

- ZyXEL Communications A/S
- <http://www.zyxel.dk>

Estonia

- ZyXEL Estonia
- <http://www.zyxel.com/ee/et/>

Finland

- ZyXEL Communications
- <http://www.zyxel.fi>

France

- ZyXEL France
- <http://www.zyxel.fr>

Germany

- ZyXEL Deutschland GmbH
- <http://www.zyxel.de>

Hungary

- ZyXEL Hungary & SEE
- <http://www.zyxel.hu>

Latvia

- ZyXEL Latvia
- <http://www.zyxel.com/lv/lv/homepage.shtml>

Lithuania

- ZyXEL Lithuania
- <http://www.zyxel.com/lt/lt/homepage.shtml>

Netherlands

- ZyXEL Benelux
- <http://www.zyxel.nl>

Norway

- ZyXEL Communications
- <http://www.zyxel.no>

Poland

- ZyXEL Communications Poland
- <http://www.zyxel.pl>

Romania

- ZyXEL Romania
- <http://www.zyxel.com/ro/ro>

Russia

- ZyXEL Russia
- <http://www.zyxel.ru>

Slovakia

- ZyXEL Communications Czech s.r.o. organizacna zlozka
- <http://www.zyxel.sk>

Spain

- ZyXEL Spain
- <http://www.zyxel.es>

Sweden

- ZyXEL Communications
- <http://www.zyxel.se>

Switzerland

- Studerus AG
- <http://www.zyxel.ch/>

Turkey

- ZyXEL Turkey A.S.
- <http://www.zyxel.com.tr>

UK

- ZyXEL Communications UK Ltd.
- <http://www.zyxel.co.uk>

Ukraine

- ZyXEL Ukraine
- <http://www.ua.zyxel.com>

Latin America

Argentina

- ZyXEL Communication Corporation
- <http://www.zyxel.com/ec/es/>

Ecuador

- ZyXEL Communication Corporation
- <http://www.zyxel.com/ec/es/>

Middle East

Israel

- ZyXEL Communication Corporation
- <http://il.zyxel.com/homepage.shtml>

Middle East

- ZyXEL Communication Corporation
- <http://www.zyxel.com/me/en>

North America

USA

- ZyXEL Communications, Inc. - North America Headquarters
- <http://www.us.zyxel.com/>

Oceania

Australia

- ZyXEL Communications Corporation
- <http://www.zyxel.com/au/en/>

Africa

South Africa

- Nology (Pty) Ltd.
- <http://www.zyxel.co.za>

Legal Information

Copyright

Copyright © 2015 by ZyXEL Communications Corporation.

The contents of this publication may not be reproduced in any part or as a whole, transcribed, stored in a retrieval system, translated into any language, or transmitted in any form or by any means, electronic, mechanical, magnetic, optical, chemical, photocopying, manual, or otherwise, without the prior written permission of ZyXEL Communications Corporation.

Published by ZyXEL Communications Corporation. All rights reserved.

Disclaimers

ZyXEL does not assume any liability arising out of the application or use of any products, or software described herein. Neither does it convey any license under its patent rights nor the patent rights of others. ZyXEL further reserves the right to make changes in any products described herein without notice. This publication is subject to change without notice.

Your use of the WAP3205 v2 is subject to the terms and conditions of any related service providers.

Trademarks

Trademarks mentioned in this publication are used for identification purposes only and may be properties of their respective owners.

Regulatory Notice and Statement

UNITED STATE AMERICA



The following information applies if you use the product within USA area.

FCC EMC Statement

• This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1 This device may not cause harmful interference, and
 - 2 this device must accept any interference received, including interference that may cause undesired operation.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
 - This product has been tested and complies with the specifications for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used according to the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
 - If this equipment does cause harmful interference to radio or television reception, which is found by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - 1 Reorient or relocate the receiving antenna.
 - 2 Increase the separation between the equipment or devices.
 - 3 Connect the equipment to an outlet other than the receiver's.
 - 4 Consult a dealer or an experienced radio/TV technician for assistance.

FCC Radiation Exposure Statement

- This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.
- This transmitter must be at least 20 cm from the user and must not be co-located or operating in conjunction with any other antenna or transmitter.

CANADA

The following information applies if you use the product within Canada area.

Industry Canada ICES statement

CAN ICES-3 (B)/NMB-3(B)

Industry Canada RSS-GEN & RSS-210 statement

- This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
- Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.
- This radio transmitter has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.
- Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
- Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.
- Le présent émetteur radio de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Industry Canada radiation exposure statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

EUROPEAN UNION



The following information applies if you use the product within the European Union.

Declaration of Conformity with Regard to EU Directive 1999/5/EC (R&TTE Directive)

Compliance information for 2.4GHz and/or 5GHz wireless products relevant to the EU and other Countries following the EU Directive 1999/5/EC (R&TTE).

Български (Bulgarian)	С настоящото ZyXEL декларира, че това оборудване е в съответствие със съществените изисквания и другите приложими разпоредбите на Директива 1999/5/EC.
Español (Spanish)	Por medio de la presente ZyXEL declara que el equipo cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Čeština (Czech)	ZyXEL tímto prohlašuje, že tento zařízený je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/EC.
Dansk (Danish)	Undertegnede ZyXEL erklærer herved, at følgende udstyr overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Deutsch (German)	Hiermit erklärt ZyXEL, dass sich das Gerät Ausstattung in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EU befindet.
Eesti keel (Estonian)	Käesolevaga kinnitab ZyXEL seadme seadmed vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
Ελληνικά (Greek)	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ ΖΥΧΕΛ ΔΗΛΩΝΕΙ ΟΤΙ ΕΞΟΠΛΙΣΜΟΣ ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
English	Hereby, ZyXEL declares that this equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Français (French)	Par la présente ZyXEL déclare que l'appareil équipements est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/EC.
Hrvatski (Croatian)	ZyXEL ovime izjavljuje da je radijska oprema tipa u skladu s Direktivom 1999/5/EC.
Íslenska (Icelandic)	Hér með lýsir, ZyXEL því yfir að þessi búnaður er í samræmi við grunnkröfur og önnur viðeigandi ákvæði tilskipunar 1999/5/EC.

Italiano (Italian)	Con la presente ZyXEL dichiara che questo attrezzatura è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviešu valoda (Latvian)	Ar šo ZyXEL deklarē, ka iekārtas atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių kalba (Lithuanian)	Šiuo ZyXEL deklaruoją, kad šis įranga atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
Magyar (Hungarian)	Alulírott, ZyXEL nyilatkozom, hogy a berendezés megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EK irányelv egyéb előírásainak.
Malti (Maltese)	Hawnhekk, ZyXEL, jiddikjara li dan taghmir jikkonforma mal-htigijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Dirrettiva 1999/5/EC.
Nederlands (Dutch)	Hierbij verklaart ZyXEL dat het toestel uitrusting in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EC.
Polski (Polish)	Niniejszym ZyXEL oświadcza, że sprzęt jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
Português (Portuguese)	ZyXEL declara que este equipamento está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/EC.
Română (Romanian)	Prin prezenta, ZyXEL declară că acest echipament este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 1999/5/EC.
Slovenčina (Slovak)	ZyXEL týmto vyhlasuje, že zariadenia spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/EC.
Slovenščina (Slovene)	ZyXEL izjavlja, da je ta oprema v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/EC.
Suomi (Finnish)	ZyXEL vakuuttaa täten että laitteet tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Svenska (Swedish)	Härmed intygar ZyXEL att denna utrustning står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EC.
Norsk (Norwegian)	Erklærer herved ZyXEL at dette utstyret er i samsvar med de grunnleggende kravene og andre relevante bestemmelser i direktiv 1999/5/EF.

National Restrictions

This product may be used in all EU countries (and other countries following the EU Directive 2014/53/EU) without any limitation except for the countries mentioned below:

Ce produit peut être utilisé dans tous les pays de l'UE (et dans tous les pays ayant transposés la directive 2014/53/UE) sans aucune limitation, excepté pour les pays mentionnés ci-dessous:

Questo prodotto è utilizzabile in tutte i paesi EU (ed in tutti gli altri paesi che seguono le direttiva 2014/53/UE) senza nessuna limitazione, eccetto per i paesi menzionati di seguito:

Das Produkt kann in allen EU Staaten ohne Einschränkungen eingesetzt werden (sowie in anderen Staaten die der Richtlinie 2014/53/EU folgen) mit Ausnahme der folgenden aufgeführten Staaten:

In the majority of the EU and other European countries, the 2.4GHz and 5GHz bands have been made available for the use of wireless local area networks (LANs). Later in this document you will find an overview of countries in which additional restrictions or requirements or both are applicable.

The requirements for any country may evolve. ZyXEL recommends that you check with the local authorities for the latest status of their national regulations for both the 2.4GHz and 5GHz wireless LANs.

The following countries have restrictions and/or requirements in addition to those given in the table labeled "Overview of Regulatory Requirements for Wireless LANs":.

Belgium

The Belgian Institute for Postal Services and Telecommunications (BIPT) must be notified of any outdoor wireless link having a range exceeding 300 meters. Please check <http://www.bipt.be> for more details.

Draadloze verbindingen voor buitengebruik en met een reikwijdte van meer dan 300 meter dienen aangemeld te worden bij het Belgisch Instituut voor postdiensten en telecommunicatie (BIPT). Zie <http://www.bipt.be> voor meer gegevens.

Les liaisons sans fil pour une utilisation en extérieur d'une distance supérieure à 300 mètres doivent être notifiées à l'Institut Belge des services Postaux et des Télécommunications (IBPT). Visitez <http://www.ibpt.be> pour de plus amples détails.

Denmark

In Denmark, the band 5150 - 5350 MHz is also allowed for outdoor usage.

I Danmark må frekvensbåndet 5150 - 5350 også anvendes udendørs.

Italy

This product meets the National Radio Interface and the requirements specified in the National Frequency Allocation Table for Italy. Unless this wireless LAN product is operating within the boundaries of the owner's property, its use requires a "general authorization." Please check <http://www.sviluppoeconomico.gov.it/> for more details.

Questo prodotto è conforme alla specifiche di Interfaccia Radio Nazionali e rispetta il Piano Nazionale di ripartizione delle frequenze in Italia. Se non viene installato all'interno del proprio fondo, l'utilizzo di prodotti Wireless LAN richiede una "Autorizzazione Generale". Consultare <http://www.sviluppoeconomico.gov.it/> per maggiori dettagli.

Latvia

The outdoor usage of the 2.4 GHz band requires an authorization from the Electronic Communications Office. Please check <http://www.esd.lv> for more details.

2.4 GHz frekvenču joslas izmantošanai ārpus telpām nepieciešama atļauja no Elektronisko sakaru direkcijas. Vairāk informācijas: <http://www.esd.lv>.

Notes:

1. Although Norway, Switzerland and Liechtenstein are not EU member states, the EU Directive 2014/53/EU has also been implemented in those countries.
2. The regulatory limits for maximum output power are specified in EIRP. The EIRP level (in dBm) of a device can be calculated by adding the gain of the antenna used (specified in dBi) to the output power available at the connector (specified in dBm).

List of national codes

COUNTRY	ISO 3166 2 LETTER CODE	COUNTRY	ISO 3166 2 LETTER CODE
Austria	AT	Liechtenstein	LI
Belgium	BE	Lithuania	LT
Bulgaria	BG	Luxembourg	LU
Croatia	HR	Malta	MT
Cyprus	CY	Netherlands	NL
Czech Republic	CR	Norway	NO
Denmark	DK	Poland	PL
Estonia	EE	Portugal	PT
Finland	FI	Romania	RO
France	FR	Serbia	RS
Germany	DE	Slovakia	SK
Greece	GR	Slovenia	SI
Hungary	HU	Spain	ES
Iceland	IS	Sweden	SE
Ireland	IE	Switzerland	CH
Italy	IT	Turkey	TR
Latvia	LV	United Kingdom	GB

Safety Warnings

- Do NOT use this product near water, for example, in a wet basement or near a swimming pool.
- Do NOT expose your device to dampness, dust or corrosive liquids.
- Do NOT store things on the device.
- Do NOT install, use, or service this device during a thunderstorm. There is a remote risk of electric shock from lightning.
- Connect ONLY suitable accessories to the device.
- Do NOT open the device or unit. Opening or removing covers can expose you to dangerous high voltage points or other risks. ONLY qualified service personnel should service or disassemble this device. Please contact your vendor for further information.
- Make sure to connect the cables to the correct ports.
- Place connecting cables carefully so that no one will step on them or stumble over them.
- Always disconnect all cables from this device before servicing or disassembling.
- Use ONLY an appropriate power adaptor or cord for your device. Connect it to the right supply voltage (for example, 110V AC in North America or 230V AC in Europe).
- Do NOT allow anything to rest on the power adaptor or cord and do NOT place the product where anyone can walk on the power adaptor or cord.
- Do NOT use the device if the power adaptor or cord is damaged as it might cause electrocution.
- If the power adaptor or cord is damaged, remove it from the device and the power source.
- Do NOT attempt to repair the power adaptor or cord. Contact your local vendor to order a new one.
- Do not use the device outside, and make sure all the connections are indoors. There is a remote risk of electric shock from lightning.
- Do NOT obstruct the device ventilation slots, as insufficient airflow may harm your device.
- Antenna Warning! This device meets ETSI and FCC certification requirements when using the included antenna(s). Only use the included antenna(s).
- If you wall mount your device, make sure that no electrical lines, gas or water pipes will be damaged.
- The PoE (Power over Ethernet) devices that supply or receive power and their connected Ethernet cables must all be completely indoors.
- This product is for indoor use only (utilisation intérieure exclusivement).
- FOR COUNTRY CODE SELECTION USAGE (WLAN DEVICES)
Note: The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all Wi-Fi product marketed in US must fixed to US operation channels only.

The following warning statements apply, where the disconnect device is not incorporated in the equipment or where the plug on the power supply cord is intended to serve as the disconnect device,

- for PERMANENTLY CONNECTED EQUIPMENT, a readily accessible disconnect device shall be incorporated external to the equipment;

- for PLUGGABLE EQUIPMENT, the socket-outlet shall be installed near the equipment and shall be easily accessible.

Environment statement

ErP (Energy-related Products)

ZyXEL products put on the EU market in compliance with the requirement of the European Parliament and the Council published Directive 2009/125/EC establishing a framework for the setting of ecodesign requirements for energy-related products (recast), so called as "ErP Directive (Energy-related Products directive) as well as ecodesign requirement laid down in applicable implementing measures, power consumption has satisfied regulation requirements which are:

Network standby power consumption < 12W, and/or

Off mode power consumption < 0.5W, and/or

Standby mode power consumption < 0.5W.

Wireless setting, please refer to "Wireless" chapter for more detail.

European Union - Disposal and Recycling Information

WEEE Directive

The symbol below means that according to local regulations your product and/or its battery shall be disposed of separately from domestic waste. If this product is end of life, take it to a recycling station designated by local authorities. At the time of disposal, the separate collection of your product and/or its battery will help save natural resources and ensure that the environment is sustainable development.

Die folgende Symbol bedeutet, dass Ihr Produkt und/oder seine Batterie gemäß den örtlichen Bestimmungen getrennt vom Hausmüll entsorgt werden muss. Wenden Sie sich an eine Recyclingstation, wenn dieses Produkt das Ende seiner Lebensdauer erreicht hat. Zum Zeitpunkt der Entsorgung wird die getrennte Sammlung von Produkt und/oder seiner Batterie dazu beitragen, natürliche Ressourcen zu sparen und die Umwelt und die menschliche Gesundheit zu schützen.

El símbolo de abajo indica que según las regulaciones locales, su producto y/o su batería deberán depositarse como basura separada de la doméstica. Cuando este producto alcance el final de su vida útil, llévelo a un punto limpio. Cuando llegue el momento de desechar el producto, la recogida por separado éste y/o su batería ayudará a salvar los recursos naturales y a proteger la salud humana y medioambiental.

Le symbole ci-dessous signifie que selon les réglementations locales votre produit et/ou sa batterie doivent être éliminés séparément des ordures ménagères. Lorsque ce produit atteint sa fin de vie, amenez-le à un centre de recyclage. Au moment de la mise au rebut, la collecte séparée de votre produit et/ou de sa batterie aidera à économiser les ressources naturelles et protéger l'environnement et la santé humaine.

Il simbolo sotto significa che secondo i regolamenti locali il vostro prodotto e/o batteria deve essere smaltito separatamente dai rifiuti domestici. Quando questo prodotto raggiunge la fine della vita di servizio portarlo a una stazione di riciclaggio. Al momento dello smaltimento, la raccolta separata del vostro prodotto e/o della sua batteria aiuta a risparmiare risorse naturali e a proteggere l'ambiente e la salute umana.

Symbolen innebär att enligt lokal lagstiftning ska produkten och/eller dess batteri kastas separat från hushållsavfallet. När den här produkten når slutet av sin livslängd ska du ta den till en återvinningsstation. Vid tiden för kasseringen bidrar du till en bättre miljö och mänsklig hälsa genom att göra dig av med den på ett återvinningsställe.



Environmental Product Declaration

Български (Bulgarian)	Čeština (Czech)	Dansk (Danish)	Deutsch (German)
<p>Екологична продуктова декларация</p> <p>RoHS Директива 2011/65/EC WEEE Директива 2012/19/EC PPW Директива 94/62/EC REACH Регламент (EC) № 1907/2006 ErP Директива 2009/125/EC</p> <p>Име/Име: Richard Hsu / Quality Management Division Senior Manager Подпис: Дата (dd/mm/yyyy): 01/10/2014</p>  	<p>Environmentální prohlášení o produktu</p> <p>RoHS Směrnice 2011/65/EU WEEE Směrnice 2012/19/EU PPW Směrnice 94/62/ES REACH Nařízení (ES) č. 1907/2006 ErP Směrnice 2009/125/ES</p> <p>Jméno/Štít: Richard Hsu / Quality Management Division Senior Manager Podpis: Datum (dd/mm/yyyy): 01/10/2014</p>  	<p>Miljøvaredeklaration</p> <p>RoHS Direktiv 2011/65/EU WEEE Direktiv 2012/19/EU PPW Direktiv 94/62/EF REACH Forordning (EF) nr. 1907/2006 ErP Direktiv 2009/125/EF</p> <p>Navn/Štít: Richard Hsu / Quality Management Division Senior Manager Underskrift: Dato (dd/mm/åååå): 01/10/2014</p>  	<p>Produkt-Umweltdeklaration</p> <p>RoHS Richtlinie 2011/65/EU WEEE Richtlinie 2012/19/EU PPW Richtlinie 94/62/EG REACH VERORDNUNG (EG) Nr. 1907/2006 ErP Richtlinie 2009/125/EG</p> <p>Name/Štít: Richard Hsu / Quality Management Division Senior Manager Unterschrift: Datum (dd/mm/yy): 2014/10/01</p>  
Esti keel (Estonian)	English	Español (Spanish)	Français (French)
<p>Toote keskkonnadeklaratsioon</p> <p>RoHS Direktiv 2011/65/EL WEEE Direktiv 2012/19/EL PPW MÄÄRUS (EÜ) nr 1907/2006 ErP Direktiv 2009/125/EC</p> <p>Nimi/ osakeis: Richard Hsu / Quality Management Division Senior Manager Allkirj: Kuupäev (pp/kk/aaaa): 01/10/2014</p>  	<p>Environmental product declaration</p> <p>RoHS Directive 2011/65/EU WEEE Directive 2012/19/EU PPW Directive 94/62/EC REACH Regulation (EC) No. 1907/2006 ErP Directive 2009/125/EC</p> <p>Name/Štít: Richard Hsu / Quality Management Division Senior Manager Signature: Date (dd/mm/yyyy): 01/10/2014</p>  	<p>Declaraciones Ambientales de Producto</p> <p>RoHS Directiva 2011/65/UE WEEE Directiva 2012/19/UE PPW Directiva 94/62/CE REACH REGLAMENTO (CE) nº 1907/2006 ErP Directiva 2009/125/CE</p> <p>Nombre/Štít: Richard Hsu / Quality Management Division Senior Manager Firma: Fecha (aaaa/mm/dd): 2014/10/01</p>  	<p>Profil environnemental de produit</p> <p>RoHS Directive 2011/65/UE WEEE Directive 2012/19/UE PPW Directive 94/62/CE REACH REGLEMENT (CE) N° 1907/2006 ErP Directive 2009/125/CE</p> <p>Nom/Štít: Richard Hsu / Quality Management Division Senior Manager Signature: Date (aaaa/mm/jj): 2014/10/01</p>  
Hrvatski (Croatian)	Italiano (Italian)	Latviešu valoda (Latvian)	Lietuvių kalba (Lithuanian)
<p>Deklaraciju o zbirjavanju proizvoda</p> <p>RoHS Direktiva 2011/65/EU WEEE Direktiva 2012/19/EU PPW Direktiva 94/62/EZ REACH Uredba (EZ) br. 1907/2006 ErP Direktiva 2009/125/EZ</p> <p>Ime/Ime: Richard Hsu / Quality Management Division Senior Manager Potpis: Datum (dd/mm/yyyy): 01/10/2014</p>  	<p>Dichiarazione ambientale di prodotto</p> <p>RoHS Direttiva 2011/65/UE WEEE Direttiva 2012/19/UE PPW Direttiva 94/62/CE REACH REGOLAMENTO (CE) n. 1907/2006 ErP Direttiva 2009/125/CE</p> <p>Nome/Štít: Richard Hsu / Quality Management Division Senior Manager Firma: Data (aaaa/mm/yy): 2014/10/01</p>  	<p>Produkta vides ietekmējuma deklarācija</p> <p>RoHS Direktīva 2011/65/EĻ WEEE Direktīva 2012/19/EĻ PPW Direktīva 94/62/EK REACH Regula (EK) Nr. 1907/2006 ErP Direktīva 2009/125/EK</p> <p>Nosaukums/Štīts: Richard Hsu / Quality Management Division Senior Manager Paraksts: Datums (dd/mm/yyyy): 01/10/2014</p>  	<p>Aplinkosauginis gaminio deklaracija</p> <p>RoHS Direktyva 2011/65/ES WEEE Direktyva 2012/19/ES PPW Direktyva 94/62/EB REACH REGLAMENTAS (ES) Nr. 1907/2006 ErP Direktyva 2009/125/EB</p> <p>Varas/Štūlis: Richard Hsu / Quality Management Division Senior Manager Parasisk: Data (ddmmmmmm): 01/10/2014</p>  
Magyar (Hungarian)	Malti (Maltese)	Nederlands (Dutch)	Polski (Polish)
<p>Környezetvédelmi terméknyilatkozatot</p> <p>RoHS 2011/65/EU irányelve WEEE 2012/19/EU irányelve PPW 94/62/EK irányelve REACH 1907/2006/EK Rendelet ErP 2009/125/EK irányelve</p> <p>Név/cím: Richard Hsu / Quality Management Division Senior Manager Aláírás: Dátum (dd/mm/yyyy): 2014/10/01</p>  	<p>Dikjarazzjoni Ambjentali dwar il-Prodott</p> <p>RoHS Direttiva 2011/65/UE WEEE Direttiva 2012/19/UE PPW Direttiva 94/62/KE REACH REGOLAMENTO (KE) NRU 1907/2006 ErP Direttiva 2009/125/KE</p> <p>Isim/Štít: Richard Hsu / Quality Management Division Senior Manager Firma: Data (aaaa/mm/yy): 2014/10/01</p>  	<p>Milieuproductverklaring</p> <p>RoHS Richtlijn 2011/65/EU WEEE Richtlijn 2012/19/EU PPW Richtlijn 94/62/EG REACH Verordening (EG) nr. 1907/2006 ErP Richtlijn 2009/125/EG</p> <p>Naam/Štít: Richard Hsu / Quality Management Division Senior Manager Handtekening: Datum (dd/mm/jaar): 01/10/2014</p>  	<p>Deklaracja środowiskowa produktu</p> <p>RoHS Dyrektywa 2011/65/UE WEEE Dyrektywa 2012/19/UE PPW Dyrektywa 94/62/WE REACH Rozporządzenie (WE) nr 1907/2006 ErP Dyrektywa 2009/125/WE</p> <p>Nazwisko/Štít: Richard Hsu / Quality Management Division Senior Manager Podpis: Data (mmmm/aaaa): 2014/10/01</p>  
Português (Portuguese)	Română (Romanian)	Slovenčina (Slovak)	Slovenščina (Slovene)
<p>Declaração ambiental do produto</p> <p>RoHS Diretiva 2011/65/UE WEEE Diretiva 2012/19/UE PPW Diretiva 94/62/CE REACH Regulamento (CE) n.º 1907/2006 ErP Diretiva 2009/125/CE</p> <p>Nome/Štít: Richard Hsu / Quality Management Division Senior Manager Assinatura: Data (dd/mm/aaaa): 01/10/2014</p>  	<p>Declarație de mediu privind produsele</p> <p>RoHS Directiva 2011/65/UE WEEE Directiva 2012/19/UE PPW Directiva 94/62/CE REACH REGULAMENTUL (CE) NR. 1907/2006 ErP Directiva 2009/125/CE</p> <p>Numele/Štít: Richard Hsu / Quality Management Division Senior Manager Semnătura: Data (zz/mm/aaaa): 01/10/2014</p>  	<p>Vyhlašení o environmentálnom výrobku</p> <p>RoHS Smernica 2011/65/EU WEEE Smernica 2012/19/EU PPW Smernica 94/62/ES REACH Nariadenie (ES) č. 1907/2006 ErP Smernica 2009/125/ES</p> <p>Menlo/Štít: Richard Hsu / Quality Management Division Senior Manager Podpis: Datum (dd/mm/yyyy): 01/10/2014</p>  	<p>Okoljska deklaracija izdelka</p> <p>RoHS Direktiva 2011/65/EU WEEE Direktiva 2012/19/EU PPW Direktiva 94/62/ES REACH Uredba (ES) št. 1907/2006 ErP Direktiva 2009/125/ES</p> <p>Ime/Štít: Richard Hsu / Quality Management Division Senior Manager Podpis: Datum (dd/mm/yyyy): 01/10/2014</p>  
Suomi (Finnish)	Svenska (Swedish)	Ελληνικά (Greek)	Norsk (Norwegian)
<p>Standardin perustava ympäristöluokitus</p> <p>RoHS Direktiiv 2011/65/EY WEEE Direktiiv 2012/19/EY PPW Direktiiv 94/62/EY REACH ASETUS (EY) N:o 1907/2006 ErP Direktiiv 2009/125/EY</p> <p>Nimi/ osakeis: Richard Hsu / Quality Management Division Senior Manager Ala kirjaksi: Päivämäärä (pp/kk/vvvv): 01/10/2014</p>  	<p>Miljöproduktdeklaration</p> <p>RoHS Direktiv 2011/65/EU WEEE Direktiv 2012/19/EU PPW Direktiv 94/62/EG REACH Förordning (EG) nr 1907/2006 ErP Direktiv 2009/125/EG</p> <p>Namn/Štít: Richard Hsu / Quality Management Division Senior Manager Namnteckning: Datum (dd/mm/yyyy): 01/10/2014</p>  	<p>Περιβαλλοντική δήλωση προϊόντος</p> <p>RoHS Οδηγία 2011/65/ΕΕ WEEE Οδηγία 2012/19/ΕΕ PPW Οδηγία 94/62/ΕΚ REACH Ένταξη (ΕΚ) αριθμ. 1907/2006 ErP Οδηγία 2009/125/ΕΚ</p> <p>Όνομα/Štít: Richard Hsu / Quality Management Division Senior Manager Υπογραφή: Ημερομηνία (ππ/μμ/εεεε): 01/10/2014</p>  	<p>Miljødeklarasjon</p> <p>RoHS Direktiv 2011/65/EU WEEE Direktiv 2012/19/EU PPW Direktiv 94/62/EF REACH Forordning (EF) nr. 1907/2006 ErP Direktiv 2009/125/EF</p> <p>Navn/Štít: Richard Hsu / Quality Management Division Senior Manager Signatur: Dato (dd/mm/yyyy): 01/10/2014</p>  

台灣



以下訊息僅適用於產品銷售至台灣地區

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Viewing Certifications

Go to <http://www.zyxel.com> to view this product's documentation and certifications.

ZyXEL Limited Warranty

ZyXEL warrants to the original end user (purchaser) that this product is free from any defects in material or workmanship for a specific period (the Warranty Period) from the date of purchase. The Warranty Period varies by region. Check with your vendor and/or the authorized ZyXEL local distributor for details about the Warranty Period of this product. During the warranty period, and upon proof of purchase, should the product have indications of failure due to faulty workmanship and/or materials, ZyXEL will, at its discretion, repair or replace the defective products or components without charge for either parts or labor, and to whatever extent it shall deem necessary to restore the product or components to proper operating condition. Any replacement will consist of a new or re-manufactured functionally equivalent product of equal or higher value, and will be solely at the discretion of ZyXEL. This warranty shall not apply if the product has been modified, misused, tampered with, damaged by an act of God, or subjected to abnormal working conditions.

Note

Repair or replacement, as provided under this warranty, is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, express or implied, including any implied warranty of merchantability or fitness for a particular use or purpose. ZyXEL shall in no event be held liable for indirect or consequential damages of any kind to the purchaser.

To obtain the services of this warranty, contact your vendor. You may also refer to the warranty policy for the region in which you bought the device at http://www.zyxel.com/web/support_warranty_info.php.

Registration

Register your product online to receive e-mail notices of firmware upgrades and information at www.zyxel.com.

Open Source Licenses

This product contains in part some free software distributed under GPL license terms and/or GPL like licenses. Open source licenses are provided with the firmware package. You can download the latest firmware at www.zyxel.com. If you cannot find it there, contact your vendor or ZyXEL Technical Support at support@zyxel.com.tw.

To obtain the source code covered under those Licenses, please contact your vendor or ZyXEL Technical Support at support@zyxel.com.tw.

Index

A

Advanced Encryption Standard
See AES.

AES [166](#)

alternative subnet mask notation [122](#)

antenna

directional [170](#)

gain [170](#)

omni-directional [170](#)

AP [9](#)

AP (access point) [160](#)

AP Mode

menu [19](#)

status screen [16, 22, 32](#)

AP+Bridge [9](#)

B

Basic Service Set, See BSS [158](#)

Bridge/Repeater [9](#)

bridged APs, security [79](#)

BSS [158](#)

C

CA [165](#)

Certificate Authority
See CA.

certifications

viewing [186](#)

Channel [18, 34](#)

channel [77, 160](#)

interference [160](#)

Configuration

restore [104](#)

contact information [174](#)

copyright [180](#)

CPU usage [19, 23, 34](#)

CTS (Clear to Send) [161](#)

customer support [174](#)

D

Daylight saving [102](#)

disclaimer [180](#)

documentation

related [2](#)

dynamic WEP key exchange [165](#)

E

EAP Authentication [164](#)

encryption [78, 166](#)

key [79](#)

WPA compatible [79](#)

ESS [159](#)

Extended Service Set, See ESS [159](#)

F

FCC interference statement [180](#)

Firmware upload [102](#)

file extension

using HTTP

firmware version [18, 23, 33](#)

fragmentation threshold [161](#)

G

General wireless LAN screen [80](#)

Guide

Quick Start [2](#)

H

hidden node [160](#)

I

IANA [127](#)

IBSS [158](#)

IEEE 802.11g [162](#)

Independent Basic Service Set
See IBSS [158](#)

initialization vector (IV) [166](#)

Internet Assigned Numbers Authority
See IANA [127](#)

IP Address [97](#)

IP alias [95](#)

L

LAN [94](#)

LAN overview [94](#)

LAN setup [94](#)

LAN TCP/IP [95](#)

Language [105](#)

Link type [18, 23, 34](#)

local (user) database [78](#)

Local Area Network [94](#)

Log [72](#)

M

MAC [86](#)

MAC address [77](#)

MAC address filter [77](#)

MAC address filtering [86](#)

MAC filter [86](#)

managing the device

good habits [10](#)

using the web configurator. See web configurator.
using the WPS. See WPS.

MBSSID [9](#)

Media access control [86](#)

Memory usage [19, 23, 34](#)

Message Integrity Check (MIC) [166](#)

mode [9](#)

N

NAT [127](#)

Navigation Panel [19](#)

navigation panel [19](#)

O

Operating Channel [18, 34](#)

operating mode [9](#)

other documentation [2](#)

P

Pairwise Master Key (PMK) [167, 168](#)

port speed [18, 23, 34](#)

preamble mode [162](#)

product registration [186](#)

PSK [167](#)

Q

Quality of Service (QoS) [88](#)

Quick Start Guide [2](#)

R

RADIUS [163](#)

message types [164](#)

- messages [164](#)
- shared secret key [164](#)
- RADIUS server [78](#)
- registration
 - product [186](#)
- related documentation [2](#)
- Reset button [10](#)
- Reset the device [10](#)
- Restore configuration [104](#)
- Roaming [87](#)
- RTS (Request To Send) [161](#)
 - threshold [160](#), [161](#)
- RTS/CTS Threshold [77](#), [87](#)

S

- Scheduling [90](#)
- Service Set [80](#)
- Service Set IDentification [80](#)
- Service Set IDentity. See SSID.
- SSID [18](#), [34](#), [77](#), [80](#)
- subnet [120](#)
- Subnet Mask [97](#)
- subnet mask [121](#)
- subnetting [123](#)
- Summary
 - Packet statistics [73](#)
 - Wireless station status [74](#)
- System General Setup [99](#)
- System restart [105](#)

T

- Temporal Key Integrity Protocol (TKIP) [166](#)
- Time setting [101](#)
- trademarks [180](#)

U

- user authentication [78](#)
 - local (user) database [78](#)

- RADIUS server [78](#)

W

- warranty [186](#)
 - note [186](#)
- Web Configurator
 - how to access [41](#)
 - Overview [41](#)
- web configurator [9](#)
- WEP Encryption [27](#), [28](#), [37](#), [38](#), [39](#), [82](#), [83](#), [85](#)
- WEP encryption [82](#)
- WEP key [82](#)
- Wi-Fi Protected Access [166](#)
- Wireless association list [74](#)
- wireless client WPA supplicants [167](#)
- wireless LAN scheduling [90](#)
- Wireless network
 - basic guidelines [76](#)
 - channel [77](#)
 - encryption [78](#)
 - example [76](#)
 - MAC address filter [77](#)
 - overview [76](#)
 - security [77](#)
 - SSID [77](#)
- Wireless security [77](#)
 - overview [77](#)
 - type [77](#)
- wireless security [162](#)
- Wireless tutorial [54](#)
 - WPS [54](#)
- Wizard setup [45](#)
- WLAN
 - interference [160](#)
 - security parameters [169](#)
- WLAN button [10](#)
- WPA [166](#)
 - key caching [167](#)
 - pre-authentication [167](#)
 - user authentication [167](#)
 - vs WPA-PSK [167](#)
 - wireless client supplicant [167](#)
 - with RADIUS application example [167](#)
- WPA compatible [79](#)

- WPA2 [166](#)
 - user authentication [167](#)
 - vs WPA2-PSK [167](#)
 - wireless client supplicant [167](#)
 - with RADIUS application example [167](#)
- WPA2-Pre-Shared Key [166](#)
- WPA2-PSK [166](#), [167](#)
 - application example [168](#)
- WPA-PSK [166](#), [167](#)
 - application example [168](#)
- WPS [9](#)