

# Port Forwarding

**ZTE ZXDSL 931 VIII**

**CYTA**



Home

VoIP

Management &amp; Diagnosis



Welcome to ZXDSL 931VII V3.0. Please login.

[How could you find the password of the device?](#)[What should you do if you forget the password of the device?](#)

Username

Password

**Ανοίξετε από το πρόγραμμα πλοήγησης σας την σελίδα του μόντεμ (192.168.10.254) και πατάς το Login χωρίς να αλλάξετε κάτι.**

**Open your Browser and type 192.168.10.254 and press the login button**


Home

Internet

Local Network

VoIP

Management &amp; Diagnosis

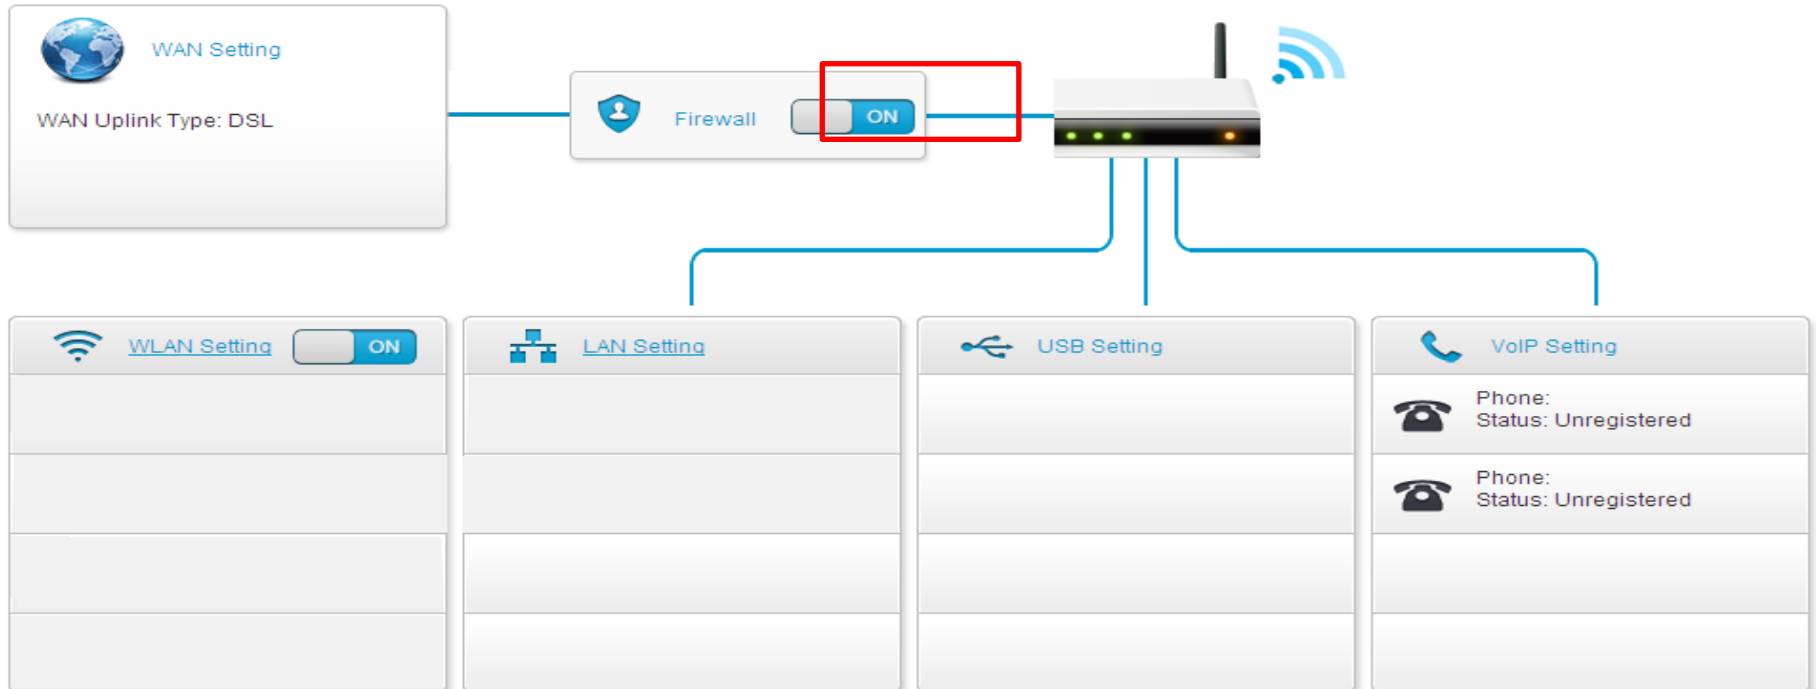

**Επιλέξτε το Local Network.**

**Choose Local Network**



Home

Internet

Local Network

VoIP

Management &amp; Diagnosis

Status

WLAN Basic Settings

WLAN Advanced

LAN Management-IPv4

## Page Information

This page provides the DHCP service of LAN configuration features.

▶ Allocated Address

▶ DHCP Server

▼ DHCP Binding

▼ New Item

Name

MAC Address

 :  :  :  :  : 

IP Address

 .  .  . 

Apply

Cancel

+ Create DHCP Binding Item

**Επιλέξτε το LAN Management IPv4 και μετά πατάς το DHCP Binding**

**Choose LAN Management IPv4 and after DHCP Binding**

**Συμπληρώστε τα στοιχεία της συσκευής σου. Το MAC και το IP υπάρχουν στο σημείο Allocated Address. Πατήστε Apply**

**Fill the information of your device. The Mac and IP addresses you can find them above in the Allocated Address**



Home

Internet

Local Network

VoIP

Management &amp; Diagnosis

Status

Security

DDNS

DMZ

Port Forwarding

Port Trigger

UPnP

## Page Information

This page provides the parameters of port forwarding configuration features.

## Port Forwarding

[Tips of Port Forwarding](#)

[+ Create Port Forwarding Item](#)

**Πατήστε Internet.  
Πατήστε Port Forwarding.  
Επιλέξτε Create Port Forwarding Item.**

**Press Internet  
Press Port Forwarding and then Create Port  
Forwarding Item**

## English translation follows


[cytauser](#) [Logout](#)

Home

Internet

Local Network

VoIP

Management &amp; Diagnosis

Status

Security

DDNS

DMZ

Port Forwarding

Port Trigger

UPnP

### Page Information

This page provides the parameters of port forwarding configuration features.

### Port Forwarding

#### [Tips of Port Forwarding](#)

▼ [New Item](#)
 On  Off
✕

Name	<input type="text"/>	
Protocol	<input type="text" value="TCP"/>	
WAN Connection	<input type="text" value="INTERNET_VDSL_IP"/>	
WAN Host Start IP	<input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> ~ <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/>	<b>To WAN Host IP μένει κενό.</b>
MAC Mapping	<input type="radio"/> On <input checked="" type="radio"/> Off	
LAN Host IP	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
WAN Start Port	<input type="text"/> ~ <input type="text"/>	
LAN Host Start Port	<input type="text"/> ~ <input type="text"/>	

Πατήστε Apply

+ [Create Port Forwarding Item](#)

**Name:** όνομα της συσκευής.  
**Protocol:** TCP ή UDP ή και τα 2.  
**WAN Connection:** επιλέγεις την σύνδεση σου (ADSL\_PPP ή VDSL\_PPP).

**LAN Host IP:** είναι το IP της συσκευής σου που βάλατε στο Binding

**WAN και LAN Host Ports:** καταχωρείς τα ports που θέλεις να ανοίξουν στο μόντεμ.



Home

Internet

Local Network

VoIP

Management &amp; Diagnosis

Status

Security

DDNS

DMZ

Port Forwarding

Port Trigger

UPnP

## Page Information

This page provides the parameters of port forwarding configuration features.

## Port Forwarding

### [Tips of Port Forwarding](#)

▼ [New Item](#)
 On  Off
✕

Name	<input type="text"/>	
Protocol	<input type="text" value="TCP"/>	
WAN Connection	<input type="text" value="INTERNET_VDSL_IP"/>	
WAN Host Start IP	<input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> ~ <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="0"/>	<b>WAN Host IP leave it blank</b>
MAC Mapping	<input type="radio"/> On <input checked="" type="radio"/> Off	
LAN Host IP	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
WAN Start Port	<input type="text"/> ~ <input type="text"/>	
LAN Host Start Port	<input type="text"/> ~ <input type="text"/>	

Press Apply

Apply
Cancel

+ [Create Port Forwarding Item](#)

**Name:** name of device  
**Protocol :** TCP or UDP or both.  
**WAN Connection :** choose your connection type (ADSL\_PPP ή VDSL\_PPP).

**LAN Host IP :** the IP you use in Binding for your device  
**WAN και LAN Host Ports :** the ports you would like to open